


Stainless Steel and Brass Marker Plates and Tags

- Provides permanent identification of pipes, conduit, valves, cables and equipment in harsh environments
- Designed for use with Panduit® Pan-Steel® Stainless Steel Cable Ties for fast installation at lowest installed cost
- All marker plates/tags can be embossed or laser etched with Panduit Factory Custom Marking Service
- For on-site custom marking see page E4.6
- Designated plates feature easy feed design with a raised slot to simplify cable tie installation and improve productivity
- Temperature range:
Stainless Steel Marker Plates, Tags, and Cable Ties:
-112°F to 1000°F (-80°C to 538°C)
- Aluminum Marker Plates and Cable Ties:
-112°F to 212°F (-80°C to 100°C)
- Brass Tags:
-112°F to 302°F (-80°C to 150°C)

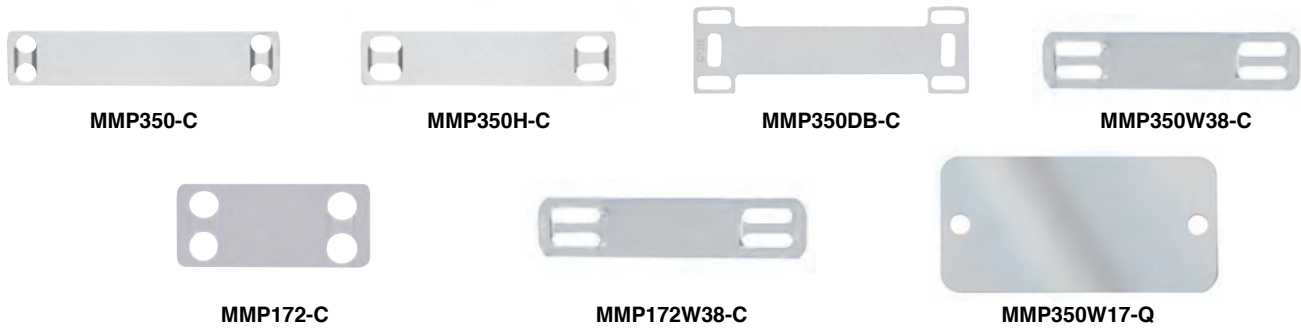

Part Number	Material	Length/ Diameter		Width		Custom Marking Parameters*		Used with Pan-Steel Cable Ties**	Thickness		Std. Pkg. Qty.	Std. Ctn. Qty.
		In.	mm	In.	mm	Max. 3/16" (4.77mm) Character per Line	Max. Lines of Text		In.	mm		
MMP350-C	304 Stainless Steel	3.50	89.0	0.75	19.0	23	3	MLT-S	0.010	0.25	100	1000
MMP350-C316	316 Stainless Steel	3.50	89.0	0.75	19.0	23	3	MLT-S	0.010	0.25	100	1000
MMP350H-C	304 Stainless Steel	3.50	89.0	0.75	19.0	20	3	MLT-H	0.010	0.25	100	1000
MMP350H-C316	316 Stainless Steel	3.50	89.0	0.75	19.0	20	3	MLT-H	0.010	0.25	100	1000
MMP350DB-C	304 Stainless Steel	3.50	89.0	1.12	29.0	20	3	MLT-H	0.015	0.38	100	1000
MMP350DB-C316	316 Stainless Steel	3.50	89.0	1.12	29.0	20	3	MLT-H	0.015	0.38	100	1000
MMP350W38-C	304 Stainless Steel	3.50	89.0	0.38	10.0	23	1	MLT-S	0.010	0.25	100	1000
MMP350W38-C316	316 Stainless Steel	3.50	89.0	0.38	10.0	23	1	MLT-S	0.010	0.25	100	1000
MMP172-C	304 Stainless Steel	1.72	44.0	0.75	19.0	8	3	MLT-S	0.010	0.25	100	1000
MMP172-C316	316 Stainless Steel	1.72	44.0	0.75	19.0	8	3	MLT-S	0.010	0.25	100	1000
MMP172W38-C	304 Stainless Steel	1.72	44.0	0.38	10.0	8	1	MLT-S	0.010	0.25	100	1000
MMP172W38-C316	316 Stainless Steel	1.72	44.0	0.38	10.0	8	1	MLT-S	0.010	0.25	100	1000
MMP350W17-Q	304 Stainless Steel	3.50	89.0	1.73	44.0	23	6	MLT-S	0.015	0.38	25	1000

*See page E4.2 for Panduit Factory Custom Marking Service information.

**See pages B3.5 – B3.6 for Pan-Steel® Stainless Steel Cable Ties.

Continues on next page