

M

**Intended Use**

Surface or stem-mounted lensed fixture for general illumination in commercial offices and indoor retail applications.

- Standard fully gasketed flush steel door with sturdy tee hinges and opposing, rotary-action cam latches
- Unit or row installation

**Features**

- 1'x4', 2'x2', 2'x4', and 4'x4' configurations available
- Die-formed, cold-rolled steel housing finished with baked white enamel

**Listings**

UL Listed to U.S. and Canadian safety standards. Optional NOM Certification.



**ORDERING INFORMATION**

Specifications subject to change.

**Example:** 2M 2 32 RW A19 MVOLT GEB10IS

Series	Number of lamps <sup>2</sup>	Lamp type <sup>2</sup>	Door	Diffuser	Voltage
M 1' wide	1	17 17W T8 (24")	(blank) Flush steel, white	A12 #12 pattern acrylic	MVOLT
2M 2' wide	2	32 32W T8 (48")	FN Flush aluminum, natural	A12125 #12 pattern acrylic, .125" thick	347 <sup>5</sup>
4M 4' wide <sup>1</sup>	3 <sup>3</sup>	CF40 40W TTS (24")	FM Flush aluminum, matte black	A19 #19 pattern acrylic, .156" thick	
	4	U31 31W T8 U (1-5/8" leg)	FW Flush aluminum, white	PC15 Parabolic plastic cube louver, specular silver	
	6	U316 31W T8 U (6" leg) <sup>4</sup>	RN Regressed aluminum, natural		
	8	14T5 14W T5 (24")	RM Regressed aluminum, matte black		
	Not included.	24T5HO 24W T5HO (24") 28T5 28W T5 (46") 54T5HO 54W T5HO (46")	RW Regressed aluminum, white		


Ballast configuration	Ballast	Lamp color	Options
(blank) 1- and/or 2-lamp ballasts per Lithonia Lighting standards	GEB10IS T8 and CF electronic ballast, ≤10% THD, instant start	LP735 Lamped with 700 series, 3500K	EL Emergency battery pack <sup>6</sup>
1/3 One 3-lamp ballast	GEB10RS T8 and CF electronic ballast, ≤10% THD, rapid start		CSA Meets Canadian standards
1/4 One 4-lamp ballast	GEB10PS Electronic ballast, ≤10% THD, programmed start		NOM Meets Mexican standards
2/3 Two 3-lamp ballasts			
2/4 Two 4-lamp ballasts			

**ADDITIONAL INFORMATION**

For additional product information, visit [www.lithonia.com](http://www.lithonia.com).

CONFIGURATIONS						
NOMINAL SIZE	SERIES	NUMBER OF LAMPS	LAMP TYPE	LENGTH IN. (CM)	WIDTH IN. (CM)	HEIGHT IN. (CM)
1'x4'	M	1, 2, 3	32	48 (121.9)	12 (30.5)	3-3/4 (9.5)
2'x2'	2M	1, 2	U316	24 (61.0)	24 (61.0)	3-3/4 (9.5)
2'x2'	2M	2, 3	17, U31, CF40	24 (61.0)	24 (61.0)	3-3/4 (9.5)
2'x2'	2M	4	17, CF40	24 (61.0)	24 (61.0)	3-3/4 (9.5)
2'x4'	2M	2, 3, 4	32	48 (121.9)	24 (61.0)	3-3/4 (9.5)
4'x4'	4M	4, 6, 8	32	48 (121.9)	48 (121.9)	3-3/4 (9.5)

Drawings are for dimensional detail only and may not represent actual mechanical configuration. Dimensions are shown in inches (centimeters) unless otherwise noted.

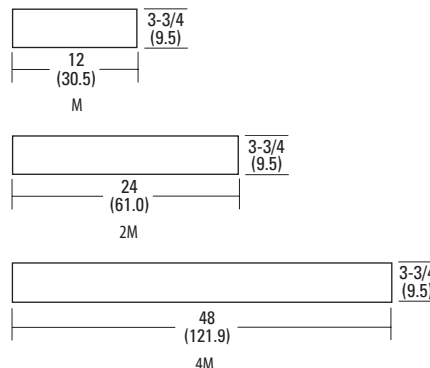

**Notes**

- 1 Center mullion standard on 4M.
- 2 See Configurations table for lamp compatibility.
- 3 Stem mounting not available on 3-lamp 2x4 models.
- 4 Not available on 3-lamp models. Use U31.
- 5 Available only with CSA option.
- 6 Consult [www.lithonia.com](http://www.lithonia.com) for available options.

Certain airborne contaminants can diminish integrity of acrylic and polycarbonate. Refer to the Acrylic & Polycarbonate Environmental Compatibility tables on pages 1116-1117 for suitable uses.