

Type CPL Plug-In Loadcentres


Non-Combination (Main Lug Only) Single Phase Type 3R

3 Wire 120/240VAC Non-Combination Service Entrance Type 3R ^① (Outdoor/Raintight)


Product Selection

Table 6. Main Lug Only Outdoor/Raintight Type 3R ^① Loadcentres

Maximum Ampere Rating	Catalogue Number	Max. No. 1" Spaces	Max. No. 1/2" Spaces	Cover Style	Dimensions (in)			Wire Size Range for Main CU/AL
					H	W	D	
100 Amp	RCCPL102 ^③	2 ^②	4	Outdoor	11-1/2	6-1/2	4	#14-2/0
125 Amp	RCCPL104 ^③	4	8	Outdoor	13	11	3-1/2	#14-2/0
125 Amp	RCCPL108 ^③	8	16	Outdoor	13	11	3-1/2	#14-2/0
125 Amp	RCPL112 ^③	12	24	Outdoor	16-1/2	14-3/8	5	#14-2/0
125 Amp	RCPL120 ^③	20	40	Outdoor	20-3/4	14-3/8	5	#14-2/0
125 Amp	RCPL130 ^③	30	60	Outdoor	28-7/8	14-3/8	5	#14-2/0
200 Amp	RCPL220 ^③	20	40	Outdoor	25	14-3/8	5	#1-300MCM
200 Amp	RCPL240 ^③	40	80	Outdoor	33-7/8	14-3/8	5	#1-250MCM

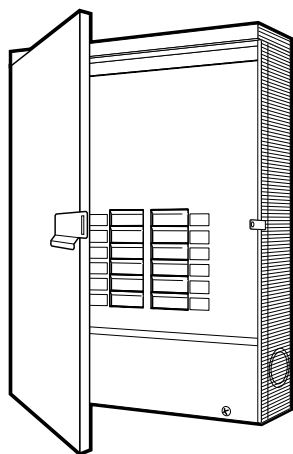

RCPL112

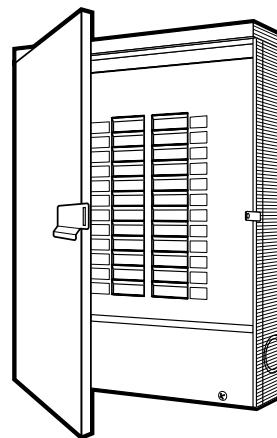

RCPL220

^① Outdoor Loadcentres accommodate Type DS conduit hubs. Hubs not included. See page 11 for selection.

^② Service equipment approved when used with 2 pole BR type breaker.

^③ All enclosures include a locking hasp as an integral part of the door latching mechanism.