




BSC4-G Series



HOR. METER TROUGHS, 200 A/POSITION • 400 AMP. 600 VOLTS MAX. MAIN LUGS — STUD TYPE

Product Specifications

- Conductor range: Line : Single 1/2" studs to accommodate compression lugs
Load: 6 AWG-250 kcmil
- For underground service only
- Aluminum tunnel type connectors (load side)
- Twin wiring compartment, increased length of the busbars and double 1/2" studs to accommodate compression lugs
- Supplied with screw type ring
- Weatherproof Type 3R enclosure
- **Used exclusively by Ottawa Hydro**

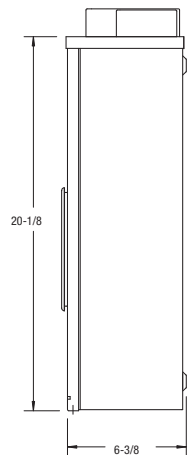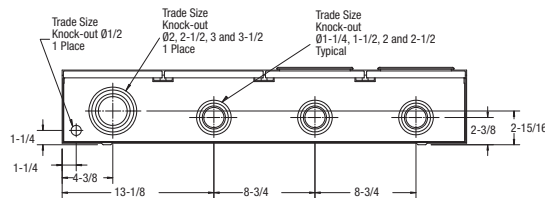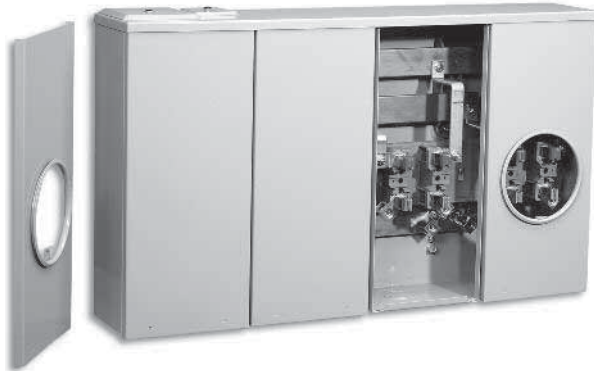

Dimensions are in inches

Ordering Information

CATALOGUE NUMBER		METER POSITION	DIMENSIONS (inches)			WEIGHT EACH	
			H	W	D	lb	kg
4 JAW							
LEFT-HAND ENTRY	RIGHT-HAND ENTRY						
BSC42-VG	BSC42-VGH	2 position	20-1/8	35	6-3/8	58	26.3
BSC43-VG	BSC43-VGH	3 position	20-1/8	43-3/4	6-3/8	72	32.7
BSC44-VG	BSC44-VGH	4 position	20-1/8	52-1/2	6-3/8	86	39.0
BSC45-VG	BSC45-VGH	5 position	20-1/8	61-1/4	6-3/8	100	45.4
BSC46-VG	BSC46-VGH	6 position	20-1/8	70	6-3/8	114	51.8

Approved for copper or aluminum.