

A


TYPE CCL

Features

- Electro-tin plated
- Sight hole
- Solid seamless tang
- Electrolytic copper
- UL 486A/B 90° C Listed and CSA Certified for 600 Volts
- May be used for high voltage applications up to 35KV
- For copper conductor only

Benefits

- Provides low contact resistance
- Visual inspection of proper cable insertion
- For performance and strength
- For high conductivity
- Ensures reliability
- Proper high voltage spacing and insulation techniques must be used

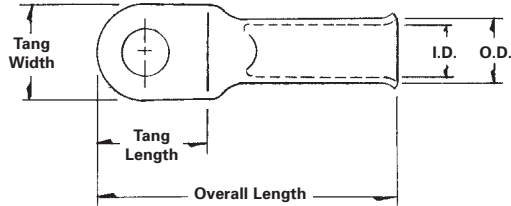

Catalog Number	Wire Size	Alt Wire Size	Bolt Size	Tang Length	Tang Width	Tang Thickness	Overall Length	Die Color Code	I.D.	O.D.
CCL-6-10	6 AWG	6 FLEX	#10	0.579	0.445	0.075	1.268	BLUE	0.232	0.299
CCL-6-14	6 AWG	6 FLEX	1/4	0.579	0.445	0.075	1.268	BLUE	0.232	0.299
CCL-6-516	6 AWG	6 FLEX	5/16	0.724	0.598	0.067	1.409	BLUE	0.232	0.299
CCL-6-38	6 AWG	6 FLEX	3/8	0.724	0.598	0.067	1.409	BLUE	0.232	0.299
CCL-6-12	6 AWG	6 FLEX	1/2	0.858	0.752	0.059	1.551	BLUE	0.232	0.299

CONTINUED ON NEXT PAGE.

Tooling Information

Catalog Number	Standard Stranded Conductor				Color Code
	ILSCO		Burndy	Thomas & Betts	
	MT-25 Hand Dieless No. of Crimps	ILC-10-N Die No. No. of Crimps	MY29-3 Hand Dieless No. of Crimps	TBM8	
CCL-6	(1)	(2)	(1)	(1)	Blue

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)

UL File E6207