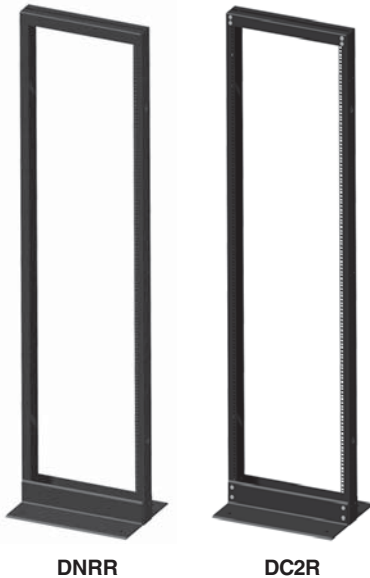


2-Post Steel (Welded & Knockdown) Relay Rack

DNRR Series

Data Communication Infrastructure


DNRR
DC2R

Application

- Suitable for many 19" rack mount applications, providing complete access to equipment.

Features

- Welded version - no assembly required. Knockdown version –convenient transport and storage, easy to assemble
- Universal EIA (5/8 - 5/8 - 1/2 inch) spacing.
- Choice of front flange or both flanges - drilled & tapped. Note: DC2R44 version features square holes.
- Base can be lagged to floor.
- Accepts optional casters and dollies.

Construction

- Fabricated in 10-gauge steel (heavy duty) or 12-gauge steel (light duty).

Finish

- Finished in rugged textured black powder paint.

Accessories

- Hardware...see page **432**
- 2 Post Shelves...see page **425**
- Cable Managers...see page **421**

Heavy Duty Relay Rack (Weight Capacity up to 1,530 lbs)

Single Tapped Welded Part No.	Double Tapped Welded Part No.	Double Tapped Knockdown Part No.	Description (10 Gauge)
DNRR70HDW	DNRR70HDWB	DNRR70HDKB	40U, 19" Rack Mounting, 70" Overall Height
DNRR77HDW	DNRR77HDWB	DNRR77HDKB	44U, 19" Rack Mounting, 77" Overall Height
DNRR84HDW	DNRR84HDWB	DNRR84HDKB	48U, 19" Rack Mounting, 84" Overall Height
-	DNRR2377HDWB	-	44U, 23" Rack Mounting, 77" Overall Height
-	DNRR2384HDWB	-	48U, 23" Rack Mounting, 84" Overall Height

Light Duty Relay Rack (Weight Capacity up to 1,200 lbs)

Single Tapped Welded Part No.	Single Tapped Knockdown Part No.	Square Hole Knockdown Part No.	Deep Channel Knockdown Part No.	Description (12 Gauge)
DNRR70LDW	DNRR1970LDK	-	DNRR1970DCK	40U, 19" Rack Mounting, 70" Overall Height
DNRR77LDW	DNRR1977LDK	DC2R44	DNRR1977DCK	44U, 19" Rack Mounting, 77" Overall Height
DNRR84LDW	DNRR1984LDK	-	-	48U, 19" Rack Mounting, 84" Overall Height

Note: Just a reminder we have over thirty (30) rack part numbers available at www.hammondmfg.com

Technical references and CAD downloads available at www.hammondmfg.com

All dimensions in inches unless specified otherwise