

JJS 600V, Class T

Specifications:

Description: Very fast-acting, current-limiting fuse.

Dimensions: See page 1-6 for Class T dimensions.

Ratings:

Volts — 600Vac (or less)

Amps — 1-800A

IR — 200kA RMS Sym.

Agency information: CE, Std. 248-15, Class T, UL Listed, Guide JDDZ, File E4273, CSA Certified, Class 1422-02, File 53787, RoHS compliant.

Features and benefits:

- Series combination ratings with branch circuit breakers allows broad range of coverage, independent of breaker manufacturer.
- Current limitation for non-inductive circuits provides Class T current-limiting response to maximum ground fault and short-circuit conditions.
- 200kA interrupting rating provides high ratings at all circuit locations.
- Small footprint allows more efficient use of available space.

Typical applications:


- Large apartment complexes
- Multi-family meter stacks
- VFD line protection

Catalog numbers (amps)


JJS-1	JJS-15	JJS-40	JJS-80	JJS-150	JJS-300	JJS-600
JJS-2	JJS-20	JJS-45	JJS-90	JJS-175	JJS-350	JJS-800
JJS-3	JJS-25	JJS-50	JJS-100	JJS-200	JJS-400	
JJS-6	JJS-30	JJS-60	JJS-110	JJS-225	JJS-450	
JJS-10	JJS-35	JJS-70	JJS-125	JJS-250	JJS-500	



Time-current characteristic curves—average melt

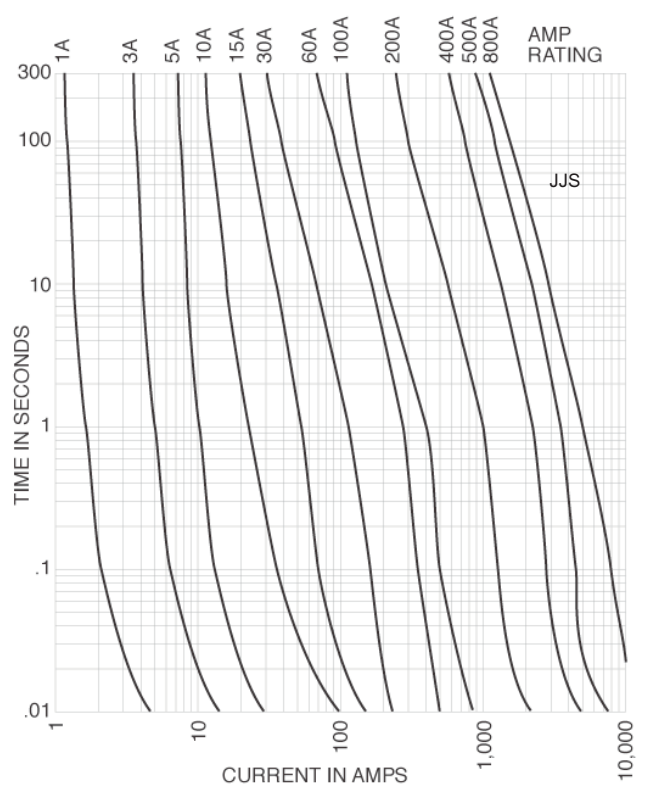

Current limitation curves

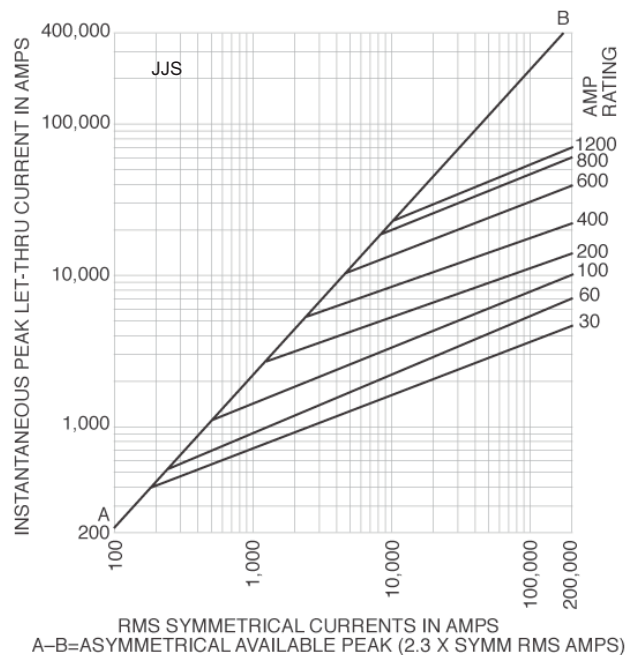

Low voltage branch circuit fuses

Recommended fuse holders and blocks for Class T fuses

- See page 1-3

Data Sheet: 1029