


Fork Terminals

- Fork terminals enable easy installation because the mounting screw does not have to be completely removed
- Brazed-seam barrel is serrated for high pull-out value. Terminal is high-conductivity electrolytic copper, electro-tin plated.
- Insulation is color coded
- Vinyl-insulated fork terminals have extra-long PVC insulation sleeve for protection and stress relief at wire's flex point
- Suffix "X" indicates an expanded insulation support, meaning a wider wire entry to accommodate heavy wall insulation




Nylon-Insulated Forks

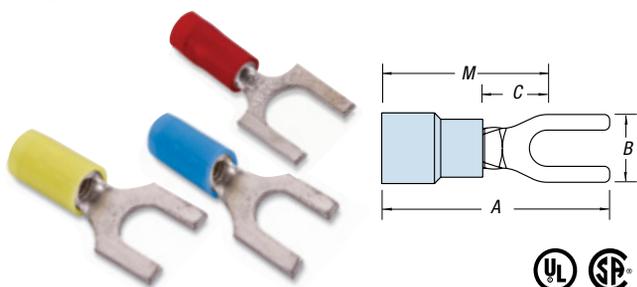

| CAT. NO. | PKG. QTY. | WIRE RANGE | MAX. INS. | BOLT HOLE | REC. TOOL | DIMENSIONS | | | | STOCK THICK. | | |
|----------|-----------|------------|-----------|-----------|-----------|------------|-----|-----|-----|--------------|-----|-----|
| | | | | | | A | B | C | M | | | |
| RA18-6F | 100 | 22-16 | .136 | #6 | ERG4001 | .83 | .25 | .25 | .71 | .02 | | |
| RA1103 | 1,000 | 22-16 | .136 | #6 | | .83 | .25 | .25 | .71 | | | |
| RA18-8F | 100 | 22-16 | .136 | #8 | | .86 | .31 | .25 | .71 | | | |
| RA1123 | 1,000 | 22-16 | .136 | #8 | | .86 | .31 | .25 | .71 | | | |
| RA18-10F | 100 | 22-16 | .136 | #10 | | .86 | .31 | .25 | .71 | | | |
| RA1153 | 1,000 | 22-16 | .136 | #10 | | .86 | .31 | .25 | .71 | | | |
| RA18-14F | 100 | 22-16 | .136 | 1/4" | | .95 | .44 | .31 | .70 | | | |
| RA1163 | 1,000 | 22-16 | .136 | 1/4" | | .95 | .44 | .31 | .70 | | | |
| RB14-6F | 100 | 18-14 | .162 | #6 | | ERG4001 | .87 | .31 | .25 | | .71 | .03 |
| RB1113 | 1,000 | 18-14 | .162 | #6 | | | .87 | .31 | .25 | | .71 | |
| RB14-8F | 100 | 18-14 | .162 | #8 | .87 | | .31 | .25 | .71 | | | |
| RB1123 | 1,000 | 18-14 | .162 | #8 | .87 | | .31 | .25 | .71 | | | |
| RB14-10F | 100 | 18-14 | .162 | #10 | .87 | | .38 | .25 | .71 | | | |
| RB1153 | 1,000 | 18-14 | .162 | #10 | .87 | | .38 | .25 | .71 | | | |
| RB14-14F | 100 | 18-14 | .162 | 1/4" | .95 | | .44 | .28 | .74 | | | |
| RB1163 | 1,000 | 18-14 | .162 | 1/4" | .95 | | .44 | .28 | .74 | | | |
| RB1103 | 1,000 | 18-14 | .162 | #6 | .74 | | .28 | .16 | .60 | | | |
| RB1124 | 1,000 | 18-14 | .190 | #8 | .95 | | .31 | .25 | .79 | | | |
| RB1154 | 1,000 | 18-14 | .190 | #10 | .95 | .31 | .25 | .79 | | | | |
| RC10-6F | 50 | 12-10 | .210 | #6 | | .97 | .31 | .27 | .81 | .04 | | |
| RC1113 | 500 | 12-10 | .210 | #6 | | .97 | .31 | .27 | .81 | | | |
| RC10-8F | 50 | 12-10 | .210 | #8 | | 1.00 | .37 | .27 | .81 | | | |
| RC1123 | 500 | 12-10 | .210 | #8 | | 1.00 | .37 | .27 | .81 | | | |
| RC10-10F | 50 | 12-10 | .210 | #10 | | 1.00 | .37 | .27 | .81 | | | |
| RC1153 | 500 | 12-10 | .210 | #10 | | 1.00 | .37 | .27 | .81 | | | |
| RC10-14F | 50 | 12-10 | .210 | 1/4" | | 1.12 | .50 | .27 | .86 | | | |
| RC1163 | 500 | 12-10 | .210 | 1/4" | | 1.12 | .50 | .27 | .86 | | | |
| RC1124 | 1,000 | 12-10 | .250 | #8 | | 1.10 | .37 | .27 | .91 | | | |
| RC1154 | 1,000 | 12-10 | .250 | #10 | | 1.10 | .37 | .27 | .91 | | | |

Nylon-Insulated Locking Forks

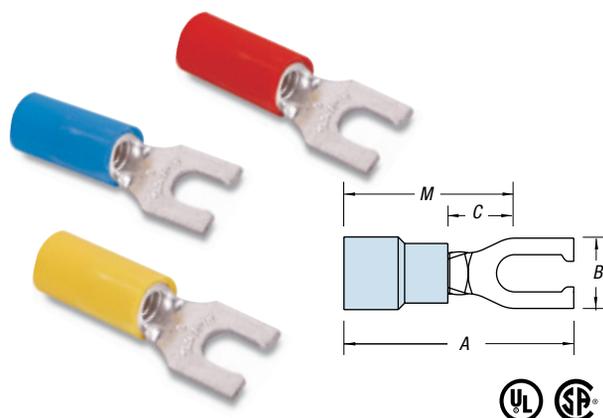

| CAT. NO. | PKG. QTY. | WIRE RANGE | MAX. INS. | BOLT HOLE | REC. TOOL | DIMENSIONS | | | | STOCK THICK. | | |
|-----------|-----------|------------|-----------|-----------|-----------|------------|-----|-----|-----|--------------|-----|-----|
| | | | | | | A | B | C | M | | | |
| RA18-6FL | 100 | 22-16 | .136 | #6 | ERG4001 | .86 | .25 | .25 | .71 | .02 | | |
| RA2213 | 1,000 | 22-16 | .136 | #6 | | .86 | .25 | .25 | .71 | | | |
| RA18-8FL | 100 | 22-16 | .136 | #8 | | .86 | .29 | .25 | .71 | | | |
| RA2243 | 1,000 | 22-16 | .136 | #8 | | .86 | .29 | .25 | .71 | | | |
| RA18-10FL | 100 | 22-16 | .136 | #10 | | .86 | .29 | .25 | .71 | | | |
| RA2253 | 1,000 | 22-16 | .136 | #10 | | .86 | .29 | .25 | .71 | | | |
| RB14-6FL | 100 | 18-14 | .162 | #6 | | ERG4001 | .87 | .25 | .25 | | .71 | .03 |
| RB2213 | 1,000 | 18-14 | .162 | #6 | | | .87 | .25 | .25 | | .71 | |
| RB2214 | 1,000 | 18-14 | .190 | #6 | | | .95 | .25 | .25 | | .79 | |
| RB14-8FL | 100 | 18-14 | .162 | #8 | | | .87 | .29 | .25 | | .71 | |
| RB2233 | 1,000 | 18-14 | .162 | #8 | .87 | | .29 | .25 | .71 | | | |
| RB14-10FL | 100 | 18-14 | .162 | #10 | .87 | | .29 | .25 | .71 | | | |
| RB2253 | 1,000 | 18-14 | .162 | #10 | .87 | | .29 | .25 | .71 | | | |
| RB2254 | 1,000 | 18-14 | .190 | #10 | .95 | | .29 | .25 | .71 | | | |
| RC10-6FL | 50 | 12-10 | .210 | #6 | | | .97 | .31 | .27 | .81 | .04 | |
| RC2203 | 500 | 12-10 | .210 | #6 | | | .97 | .31 | .27 | .81 | | |
| RC2204 | 1,000 | 12-10 | .250 | #6 | | 1.07 | .31 | .27 | .91 | | | |
| RC10-8FL | 50 | 12-10 | .210 | #8 | | 1.00 | .37 | .27 | .81 | | | |
| RC2213 | 500 | 12-10 | .210 | #8 | | 1.00 | .37 | .27 | .81 | | | |
| RC10-10FL | 50 | 12-10 | .210 | #10 | | 1.00 | .37 | .27 | .81 | | | |
| RC2223 | 500 | 12-10 | .210 | #10 | | 1.00 | .37 | .27 | .81 | | | |
| RC2224 | 1,000 | 12-10 | .250 | #10 | | 1.10 | .37 | .27 | .91 | | | |
| RC10-14FL | 50 | 12-10 | .210 | 1/4" | | 1.12 | .50 | .32 | .86 | | | |
| RC2233 | 500 | 12-10 | .210 | 1/4" | | 1.12 | .50 | .32 | .86 | | | |