



Protect your valuables

With over 80% of surges originating from inside a building, Arrow Hart's surge protection point-of-use receptacles provide branch circuit surge protection for sensitive electronic equipment that panel mounted surge protection systems cannot provide

Surge protection plus

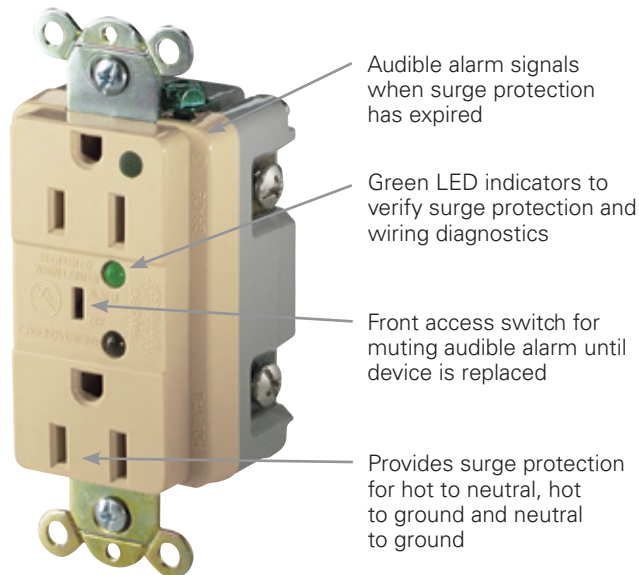

Surgebloc

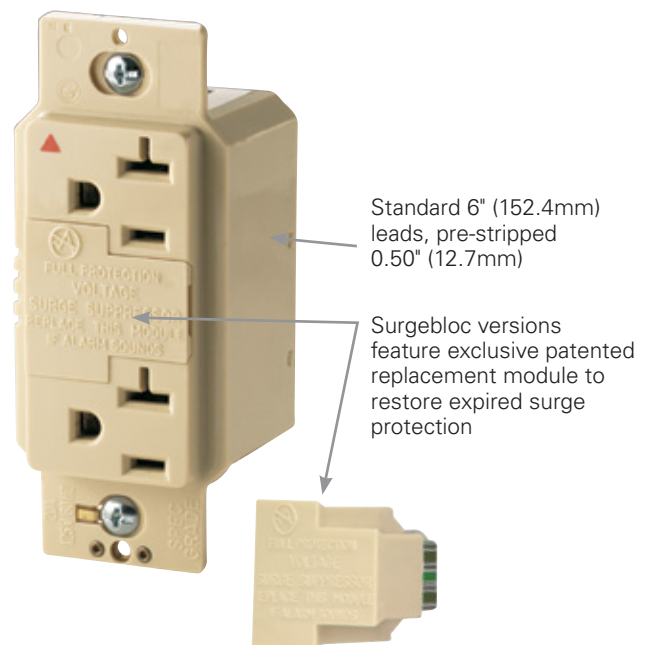

Surge protection plus

Additional features & benefits

- Available in hospital and commercial grades in 15A & 20A 125V configurations with LED, audible alarm and isolated ground versions
- 8-Hole back and side wired
- High impact thermoplastic construction

Surgebloc

Additional features & benefits


- Provides surge protection for hot to neutral, hot to ground and neutral to ground
- Available in isolated ground versions for noise protection against EMI and RFI
- Audible alarm signals when surge protection has expired

Surge protection receptacles

Surge protection receptacles with LED indicators & audible alarm

Product description

2-pole, 3-wire grounding
15A, 125V/AC; 20A, 125V/AC; NEMA 5-15R & 5-20R



5-15R **5-20R**

Features

- High impact-resistant thermoplastic mounting strap for long lasting durable installation
- LED status indication (5250, 5350) to enable easier troubleshooting



IG8200HG_S



5362_S



IG5350_S



IG1208



1209

Receptacles w/audible alarm & LED indicators, back & side wire



Rating A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125	5-15R	Hospital grade, duplex receptacle	BL, RD, V, W	□ 8200__S
			IG hospital grade, duplex receptacle	BL, RN, V, W	□ IG8200HG__S
			Commercial grade, duplex receptacle	BL, GY, V, W	□ 5262__S
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5262__S
20	125	5-20R	Hospital grade, duplex receptacle	BL, RD, V, W	□ 8300__S
			IG hospital grade, duplex receptacle	BL, RN, V, W	□ IG8300HG__S
			Commercial grade, duplex receptacle	BL, GY, V, W	□ 5362__S
			IG commercial grade, duplex receptacle	BL, GY, RN, V, W	□ IG5362__S

560 Joules, max. surge current - 18kA per mode, UL 1449 3rd edition cULus, file no. E15058

Receptacles w/LED indicators, back & side wire



Rating A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125	5-15R	Commercial grade, duplex receptacle	BL, V, W	□ 5250__S
20	125	5-20R	Commercial grade, duplex receptacle	BL, GY, V, W	□ 5350__S

840 Joules, max. surge current - 18kA per mode, cULus listed to UL 1449 3rd edition, file no E15058

Receptacles w/audible alarm



Rating A	V/AC	NEMA	Description	Color suffix	Catalog no.
15	125	5-15R	Commercial grade, duplex receptacle	V, W	□ 1208__
			IG commercial grade, duplex receptacle	V, W	□ IG1208__
20	125	5-20R	Commercial grade, duplex receptacle	V, W	□ 1210__
			IG commercial grade, duplex receptacle	V, W	□ IG1210__

340 Joules, max. surge current - 12kA per mode, cULus listed to UL 1449 3rd edition, file no E15058

Replacement surgebloc module



Description	Color suffix	Catalog no.
Replacement module for 1208 & 1210	BL, GY, V, W	□ 1209__

UL recognized accessory, file no E102018

Accessories for surge protection receptacles



Description	Color	Catalog no.
1-Gang mid-size decorator polycarbonate wallplate	BL, GY, V, W	□ PJ26__
1-Gang mid-size decorator polycarbonate wallplate, pre-marked "Isolated Ground"	RN	□ PJ26IG

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BL (Blue), GY (Gray), RD (Red), RN (Orange), V (Ivory), W (White)



Compliances, specifications and availability are subject to change without notice.