


Typical F-Frame Breaker
F-Frame Breaker with Electronic Trip Unit

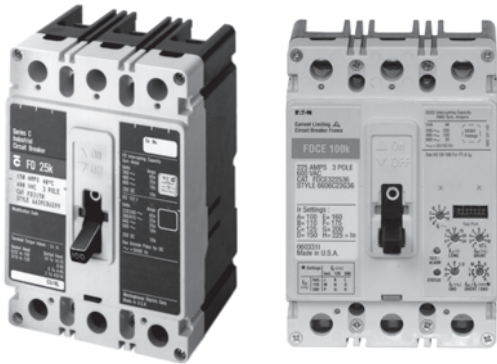

Contents

<i>Description</i>	<i>Page</i>
Product Overview	V4-T2-110
Standards and Certifications	V4-T2-111
Quick Reference	V4-T2-112
G-Frame (15–100 Amperes)	V4-T2-115
F-Frame (10–225 Amperes)	
Catalog Number Selection	V4-T2-130
Product Selection	V4-T2-131
Accessories	V4-T2-142
Technical Data and Specifications	V4-T2-143
Dimensions and Weights	V4-T2-145
J-Frame (70–250 Amperes)	V4-T2-146
K-Frame (70–400 Amperes)	V4-T2-154
L-Frame (125–600 Amperes)	V4-T2-183
M-Frame (300–800 Amperes)	V4-T2-209
N-Frame (400–1200 Amperes)	V4-T2-220
R-Frame (800–2500 Amperes)	V4-T2-235
Motor Circuit Protectors (MCP)	V4-T2-254
Motor Protection Circuit Breakers (MPCB)	V4-T2-265
Type ELC Current Limiter Attachment (Size 0–4)	V4-T2-267
Current Limiting Circuit Breaker Module	V4-T2-268
Internal Accessories	V4-T2-272
External Accessories	V4-T2-303

F-Frame (10–225 Amperes)

Product Description

- All Eaton’s F-Frame circuit breakers are HACR rated
- All circuit breakers 10 through 30 amperes are suitable for HID (high intensity discharge) use
- All F-Frame circuit breakers are suitable for reverse feed use

2.3

Molded Case Circuit Breakers

Series C

Catalog Number Selection

This information is presented only as an aid to understanding catalog numbers. It is not to be used to build catalog numbers for circuit breakers or trip units.

2

