

### D16, D27, D33, D125 Type D

#### Specifications

**Description:** DIN style Type D low voltage fuses.

**Dimensions:** See catalog numbers table and dimensions illustrations.

**Construction:** Ceramic body.

#### Ratings:

Volts: — 500Vac

Amps: — 2-100A

IR: — 50kA

**Agency information:** CE, "D" type fuses complying with DIN 49360 Part 2 and DIN 49515, operating class gL.

#### Catalog numbers

Catalog numbers	Amp ratings	Dimension "D" (mm)	Color code	Figure number
2D16	2	6	Pink	1
4D16	4	6	Brown	
6D16	6	6	Green	
10D16	10	8	Red	
16D16	16	10	Grey	
20D16	20	12	Blue	
25D16	25	14	Yellow	
2D27	2	6	Pink	2
4D27	4	6	Brown	
6D27	6	6	Green	
10D27	10	8	Red	
16D27	16	10	Grey	
20D27	20	12	Blue	
25D27	25	14	Yellow	
35D33	35	16	Black	3
50D33	50	18	White	
63D33	63	20	Copper	
80D125	80	5	Silver	4
100D125	100	7	Red	

Additional fuse links: Quick acting fuselinks in body sized D16, D27, D33 and D125 rated 2-100A. Reference number suffixed Q, i.e. 10D27Q. Voltage rating 500V. Gauge rings and keys can also be supplied.

#### Dimensions - mm

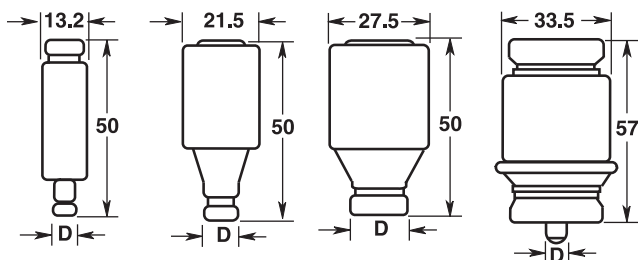


Figure 1

Figure 2

Figure 3

Figure 4

Data Sheet: 4124

### NZ01, NZ02 Type D0

#### Specifications

**Description:** Low voltage Neozed fuses suitable for use on 250Vdc systems.

**Dimensions:** See catalog numbers table and dimensions illustration.

**Construction:** Ceramic body.

#### Ratings:

Volts: — 400Vac

Amps: — 2-63A


IR: — 50kA

**Agency information:** CE

#### Catalog numbers

Catalog numbers	Amp ratings	Dimension "D" (mm)	Color code
2NZ01	2	11	Pink
4NZ01	4	11	Brown
6NZ01	6	11	Green
10NZ01	10	11	Red
16NZ01	16	11	Grey
20NZ02	20	15	Blue
25NZ02	25	15	Yellow
35NZ02	35	15	Black
50NZ02	50	15	White
63NZ02	63	15	Copper

#### Dimensions - mm



Data Sheet: 4124