


## Specification grade GFCIs

### GFCIs provide state-of-the-art, dependable electrical shock protection

In addition to being tested to the highest standards to help ensure safety, Arrow Hart GFCIs will deny power and prevent re-setting if the device is no longer able to provide safe, protected power

### Ground fault circuit interrupter features & benefits

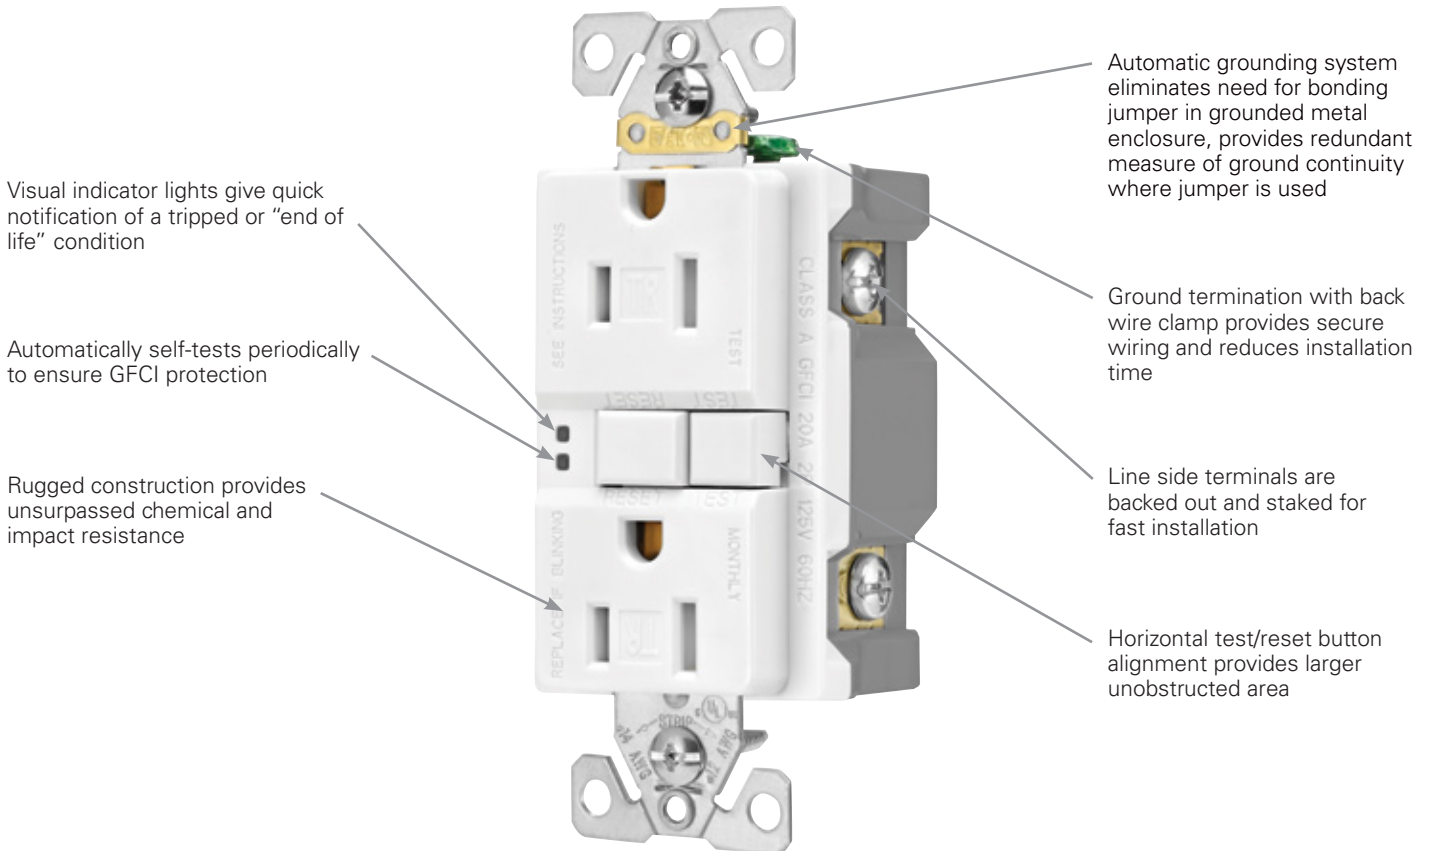

### Additional features & benefits





- Meets and exceeds 10 kA short circuit testing and underwriters laboratories (UL) 2006 UL943 safety standards
- Performs periodic self tests to ensure integrity of GFCI protection if no ground-fault protection is detected, the device will trip, will not reset and the status indicator light will glow amber
- Tapered back wire openings handle multiple wire sizes and types for applications up to #10 AWG solid or stranded wire
- When downstream receptacles are wired from load side, a 20 amp feed-through rating offers full protection
- Test and reset buttons are color matched to provide superior aesthetics
- Longer, wider "bridge" strap provides 40% more contact area with wallboard, virtually eliminating floating installations
- Exclusive built-in wire stripper provides fast stripping of wire without tools
- Line-load miswiring protection: GFCIs will not provide power downstream when wired incorrectly
- Tri-combo head terminal and mounting screws

# Specification grade GFCIs

## Specification grade tamper resistant ground fault circuit interrupter receptacles

### Product description

2-pole, 3-wire grounding  
15A, 125V/AC; 20A, 125V/AC,  
NEMA 5-15, 5-20

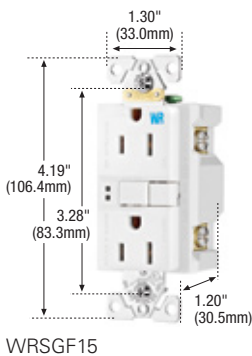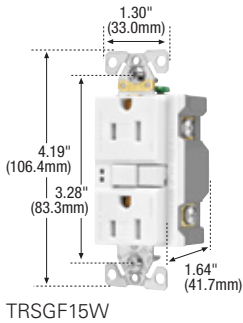

### Tamper resistant specification grade GFCIs



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.	
15	125	5-15R	Duplex GFCI, back & side wire	A, B, BK, GY, LA, V, W	□ TRSGF15__	•	
			Duplex GFCI, mid-size wallplate, back & side wire	A, LA, V, W	□ TRSGF15__-M		
			Duplex GFCI, back & side wire	B, BK, GY, LA, RD, V, W	□ TRSGF15F__	• • •	
			Duplex GFCI with nightlight, back & side wire	A, BK, LA, V, W	□ TRSGFNL15__	•	
20	125	5-20R	Duplex GFCI, back & side wire	A, B, BK, GY, LA, RD, V, W	□ TRSGF20__	•	
			Duplex GFCI, back & side wire	B, BK, GY, LA, RD, V, W	□ TRSGF20F__	• • •	
			Duplex GFCI with nightlight, back & side wire	A, BK, LA, V, W	□ TRSGFNL20__	•	

### Weather resistant specification grade GFCIs



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.	
15	125	5-15R	Duplex GFCI, back & side wire	B, GY, V, W	□ WRS GF15__	•	
			Duplex GFCI, back & side wire	B, GY, V, W	□ WRS GF15F__	• • •	
20	125	5-20R	Duplex GFCI, back & side wire	B, BK, GY, V, W	□ WRS GF20__	•	
			Duplex GFCI, back & side wire	B, GY, V, W	□ WRS GF20F__	• • •	

### Tamper & weather resistant specification grade GFCIs



Rating	A	V/AC	NEMA	Description	Color suffix	Catalog no.	
15	125	5-15R	Duplex GFCI, back & side wire	B, GY, LA, V, W	□ TWRSGF15__	•	
			Duplex GFCI, back & side wire	B, GY, LA, V, W	□ TWRSGF15F__	• • •	
20	125	5-20R	Duplex GFCI, back & side wire	B, GY, LA, V, W	□ TWRSGF20__	•	
			Duplex GFCI, back & side wire	B, GY, LA, V, W	□ TWRSGF20F__	• • •	

Includes standard size unbreakable wallplate unless otherwise noted  
Consult factory customer service representative for additional packaging options

### Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: A (Almond), B (Brown), BK (Black), GY (Gray), LA (Light Almond), RD (Red), V (Ivory), W (White)

A	B	BK	GY	LA	RD	V	W
(Almond)	(Brown)	(Black)	(Gray)	(Lt. Almond)	(Red)	(Ivory)	(White)

**Specification information:** Specification grade GFCI: H-16, H17

**Compliances, specifications and availability are subject to change without notice.**




- ArrowLink option available. Add "MOD" suffix to standard catalog number (example SGF15W, SGF15WMOD). For ordering information on ArrowLink & ArrowLink SPD connectors
- 🇺🇸 Indicates NAFTA compliant - Page Q-32
- 🌿 RoHS compliant - Page Q-32
- TR Tamper resistant
- WR Weather resistant
- TWR Tamper & weather resistant

# Specification grade GFCl specification & performance data

## Specification grade ground fault circuit interrupter receptacles

### Product description

2-pole, 3-wire grounding  
15A, 125V/AC; 20A, 125V/AC  
NEMA 5-15, 5-20

Device type	Specification grade tamper resistant & weather resistant duplex GFCI 15A & 20A: TRSGF, TRSGF__F, WRSGF, TWRSGF series	  
<b>Wiring type</b>	Back & side wire	
<b>Testing &amp; code compliance</b>	<ul style="list-style-type: none"> <li>• cULus Listed to UL498 and UL943, file no. E60120</li> <li>• Meets all UL943 (GFCI), UL498 (receptacles) and applicable CSA requirements</li> <li>• NOM certified</li> </ul>	
<b>Environmental specifications</b>	<b>Flammability:</b> Meets UL94 requirements; V2 rated <b>Temperature rating:</b> -35°C to 66°C (-31°F to 150.8°F)	
<b>Electrical specifications</b>	<b>Dielectric voltage:</b> Withstands 2000V per UL498 <b>Current interrupting:</b> Yes, at full-rated current <b>Temperature rise:</b> max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC) <b>Trip time:</b> 0.025 seconds (Class A) <b>Frequency:</b> 60 Hz; Voltage: 125V; Amperage: 15A/20A 20A feed through <b>Short circuit testing:</b> Meets and exceeds 10 kA <b>Maximum interrupting capacity:</b> 20 Amps	
<b>Mechanical specifications</b>	<b>Terminal accommodation:</b> #14 - #10 AWG <b>Voltage ratings:</b> Permanently marked on device	
<b>Materials</b>	<b>Top housing:</b> Polypropylene (Spec grade tamper resistant); Nylon (Dead front, hospital grade, weather resistant, tamper & weather resistant) <b>Bottom housing:</b> PVC <b>Strap:</b> 0.040" thick steel, zinc plated; WR & TWR: nickel plated <b>Line contacts:</b> 0.030" thick brass <b>Terminal &amp; ground screws:</b> Terminal: brass/nickel plated steel; WR & TWR brass/nickel plated stainless steel; Ground: ground screw green on all models, WR and TWR stainless steel <b>Terminal clamps:</b> Brass-plated steel; WR & TWR nickel plated steel	

Device type	Specification grade GFCI 15A & 20A: SGF and SGF__F series
<b>Wiring type</b>	Back & side wire
<b>Testing &amp; code compliance</b>	<ul style="list-style-type: none"> <li>• cULus Listed to UL498 and UL943, file no. E60120</li> <li>• Meets all UL943 (GFCI), UL498 (receptacles) and applicable CSA requirements</li> <li>• NOM certified</li> </ul>
<b>Environmental specifications</b>	<b>Flammability:</b> Meets UL94 requirements; V2 rated <b>Temperature rating:</b> -35°C to 66°C (-31°F to 150.8°F)
<b>Electrical specifications</b>	<b>Dielectric voltage:</b> Voltage: withstands 2000V per UL498 <b>Current interrupting:</b> Yes, at full-rated current <b>Temperature rise:</b> Max. 30°C (86°F) after 100 cycles of overload @ 150% of rated current (DC) <b>Trip time:</b> 0.025 seconds (Class A) <b>Frequency:</b> 60 Hz; Voltage: 125V; Amperage: 15A/20A 20A feed through <b>Short circuit testing:</b> Meets and exceeds 10 kA <b>Maximum interrupting capacity:</b> 20 Amps
<b>Mechanical specifications</b>	<b>Terminal accommodation:</b> #14 - #10 AWG <b>Voltage ratings:</b> Permanently marked on device
<b>Materials</b>	<b>Top housing:</b> Polypropylene (Spec grade tamper resistant); Nylon (Dead front, hospital grade, weather resistant, tamper & weather resistant) <b>Bottom housing:</b> PVC <b>Strap:</b> 0.040" thick steel, zinc plated <b>Line contacts:</b> 0.030" thick brass <b>Terminal &amp; ground screws:</b> #8-32 steel, brass plated; neutral screw nickel plated, ground screw green <b>Terminal clamps:</b> 0.070" thick steel

Compliances, specifications and availability are subject to change without notice.