


Aluminum Conduit Benders

NEW!

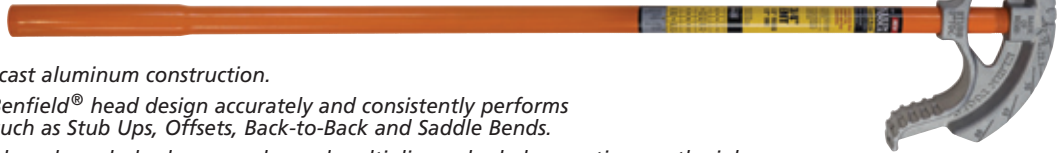

56207

- Lightweight die-cast aluminum construction.
- The traditional Benfield® head design accurately and consistently performs common bends such as Stub Ups, Offsets, Back-to-Back and Saddle Bends.
- Bold cast-in benchmark symbols, degree scales and multiplier scales help save time on the job.
- Textured interior hook surface prevents conduit from rolling or twisting during bends.
- Wide foot pedal provides excellent stability and features angled grooves for extra traction.

Cat. No.	Description:	Thinwall/EMT	Rigid/IMC	Radius	Weight (lbs.)
56206	assembled aluminum conduit bender w/#51427 handle	1/2" (13 mm)	-	4"	4.4
56207	assembled aluminum conduit bender w/#51427 handle	3/4" (19 mm)	1/2" (13 mm)	5"	5.4

Benfield® Benders

Benfield® Powr-Jack® Benders

- Easy to read, cast-in benchmark symbols.
- Features a two-position booster step that makes it possible to bend up to 1-1/4" (32 mm) EMT, and 1" (25 mm) Rigid and IMC without expensive power tools.
- Eliminates the need for costly, pre-formed elbows.



51206

Cat. No.	Description	Thinwall/EMT	Rigid/IMC	Radius	Weight (lbs.)
51206	bender head	1-1/4" (32 mm)	1" (25 mm)	10" (254 mm)	16.50

Bender Handles



51429

- Available in multiple sizes and lengths and are compatible with all Klein Tools conduit bender heads.
- High-strength steel eliminates flex and provides excellent feel, control and leverage.
- Each handle features an enlarged diameter hollow end for inserting conduit to correct overbends.
- Bright orange color is easy to spot on the jobsite.
- Attached Benfield® bender guide includes many common bend formulas and reference points.

Cat. No.	Description:	Weight (lbs.)
51427	conduit bender handle - 38" L, 3/4" NPT tap size fits #56200 and 56201 bender heads and is replacement handle for #56206 and #56207.	3.5
51428	conduit bender handle - 44" L, 1" NPT tap size fits #56202 bender head.	6.0
51429	conduit bender handle - 54" L, 1-1/4" NPT tap size fits #51206 bender head.	8.9

All dimensions are in inches and (millimeters) unless otherwise specified.

WARNING: Always wear approved eye protection.

