

In-line fuse holders for 1/4" x 7/8" to 1 1/4" fuses

HFB and HFB-10



Specifications

Description: Water-resistant in-line fuse holder for 1/4" x 1 1/4" fuses.

Dimensions: See Dimensions illustration.

Construction: Thermoplastic rubber body with tin-plated, copper contacts.

Ratings:

Volts: — 32V

Amps: — 30A max

Catalog numbers

Catalog numbers	Description
BP/HFB-RP*	Standard pack (10-in)
BK/HFB	Bulk pack (100-in)
BK/1A2294	HFB replacement contact clip
1A2294-01	HFB-10** replacement contact clip

*HFB accepts #12 to #18 wire leads (not provided). See Data Sheet for recommended crimp tools.

**HFB-10 accepts #10 wire leads (not provided). See Data Sheet for recommended crimp tools.


Features/benefits

- Simple assembly with one-piece thermoplastic (important information molded into body)
- High visibility yellow color for easy identification in dark or hard-to-access locations
- Ideal for shock and vibration environments; withstands many organic solvents; temperature range - 40/+150°C

Typical applications

- Supplemental, low voltage, low amperage control circuits

Dimensions - in (mm)

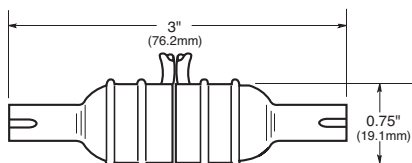

Data Sheet: 2102

HHB



Specifications

Description: Universal in-line fuse holder for 1/4" x 7/8", 1" and 1 1/4" fuses.

Dimensions: See dimensions illustration.

Construction: Nylon body with tin-plated, copper contacts.

Ratings:

Volts: — 32V

Amps: — 30A max

Flammability rating: UL 94V2.

Pull force: 5lbs minimum to separate fuse holder housing with fuse installed.

Features and benefits

- HHB Universal in-line fuse holder for 1/4" x 7/8", 1" and 1 1/4" fuses.

Typical applications

- Supplemental, low voltage, low amperage control circuits

Catalog numbers

Holder — without leads* - RoHS compliant

Catalog numbers	Description
HHB-R	Standard pack (10-in)
BK/HHB-R	Bulk pack (100-in)

*Accepts #12 to #16 wire leads (not provided with basic fuse holder). See Data Sheet for recommended crimp tools.


Holder — with pre-attached #14 Insulated lead wires - Not RoHS compliant unless noted

Catalog numbers	19" length	8" length	Wire color
BK/HHB-Y419	BK/HHB-Y408		Yellow
BK/HHB-R419	BK/HHB-R408**		Red
BK/HHB-B419	BK/HHB-B408		Black

**RoHS compliant.

Dimensions - in (mm)

Fuse length	Fuse holder length "L"
7/8" (AGW)	2.100 max
1" (AGX)	2.250 max
1 1/4" (AGC, MDL)	2.420 max



Data Sheet: 2103

HRK



Specifications

Description: Universal in-line fuse holder for 1/4" x 7/8" to 1 1/4" fuses.

Dimensions: See dimensions illustration.

Construction: 8" (203mm) #14 lead wires.

Ratings:

Volts: — 32V

Amps: — 15A max

Features and benefits

- HRK Universal in-line fuse holder for 1/4" x 7/8", 1" and 1 1/4" fuses with #14 lead wires.
- RoHS compliant

Typical applications


- Supplemental, low voltage, low amperage control circuits

Catalog number

Catalog number	Amp rating	Volts	Fuse description
HRK-R*	15	32	1/4" diameter fuses of different lengths.

*Three springs furnished with fuse holder to accommodate different length 1/4" fuses.

Dimensions - in (mm)

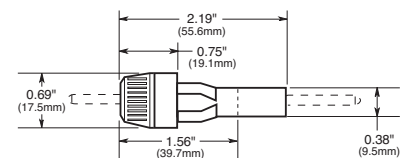

Data Sheet: 2111