

# Locking Devices

## Weather Protective Boots; 72002 Series



- Help prevent moisture, dust and other contaminants from infiltrating plugs and connectors
- Chemical/UV-resistant construction
- Available in high visibility yellow or standard black
- Ribbed exterior provides firm grip
- Sealing ring seals connector when not mated
- For use with Bryant Triple Gripper® 20 and 30 amp nylon plugs and connectors



**72002BP**



**72002BC with  
72002BSR**



**7716B**



**7717B**

### WEATHER PROTECTIVE BOOTS

Description	Catalog Number
Black neoprene boot for use with 20 and 30 amp nylon locking plugs	<b>72002BPB</b>
Yellow neoprene boot for use with 20 and 30 amp nylon locking plugs	<b>72002BP</b>
Black neoprene boot for use with 20 and 30 amp nylon locking connectors	<b>72002BCB</b>
Yellow neoprene boot for use with 20 and 30 amp nylon locking connectors	<b>72002BC</b>
Black neoprene sealing cap seals connector	<b>72002BSRB</b>
Yellow neoprene sealing cap seals connector	<b>72002BSR</b>
Black elastomer weather protective boot for 50 amp plugs when used in a cord set and connectors when used with flanged inlets	<b>7716B</b>
Black elastomer weather protective boot for 50 amp connectors when used in a cord set	<b>7717B</b>

# Locking Devices

50 Amp 125/250V AC, 3Ø 250V AC and 3Ø 480V AC; 3-Pole 4-Wire Grounding



CS6369A



CS6365



CS6364



CS6375A



7382



7383



50A 125/250V AC  
3P 4W  
Grounding



50A 3Ø 250V AC  
3P 4W  
Grounding



50A 3Ø 480V AC  
3P 4W  
Grounding

## SINGLE RECEPTACLES

Description	Catalog Number		
Receptacle armored; grounded	CS6369A	CS8369A	CS8169A





## PLUGS AND CONNECTORS Inches (mm)

Description	Cord Diameter	Catalog Number		
Nylon plug; heavy-duty	.830-1.250 (21.1-31.8)	CS6365	CS8365	CS8165
Nylon connector; heavy-duty	.830-1.250 (21.1-31.8)	CS6364	CS8364	CS8164

## FLANGED DEVICES

Description	Catalog Number		
Male base; steel casing	CS6375A	CS8375A	CS8175A
Male base; steel casing with weatherproof cover plate	—	CS8375MBWP	—

## PRODUCT DIMENSIONS Inches (mm)

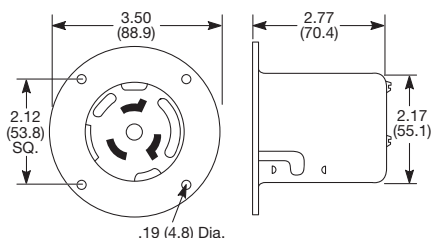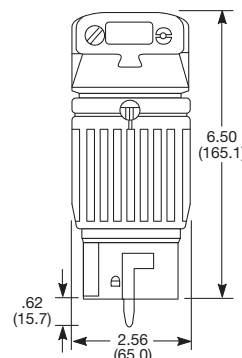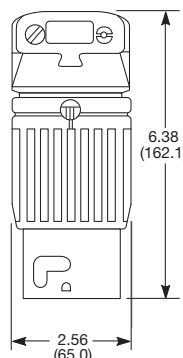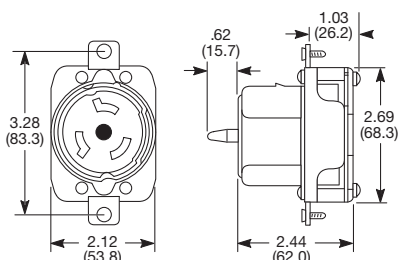

## ACCESSORIES

Description	Stainless Steel Wallplate	Aluminum Plate		Weather Protective Plate	Weather Protective Boot	
		Cover	No Cover		For use with Cordsets	For use with Flanged Inlets
Single receptacle	SS750	7382	7383	7774CR	—	—
Plug	—	—	—	—	7716B*	—
Connector	—	—	—	—	7717B*	7716B*

Note: See section O for additional information on wallplates.

\*Boots are not UL Listed or CSA Certified. See page H-35 for additional information on boots.