

Straight Blade Devices

Cobra® Product Features




COBRA®

High visibility yellow for easy identification

Captive combination Slot/Phillips/Robertson head terminal and assembly screws

Impact/chemical resistant nylon construction

Amperage/voltage rating molded in face

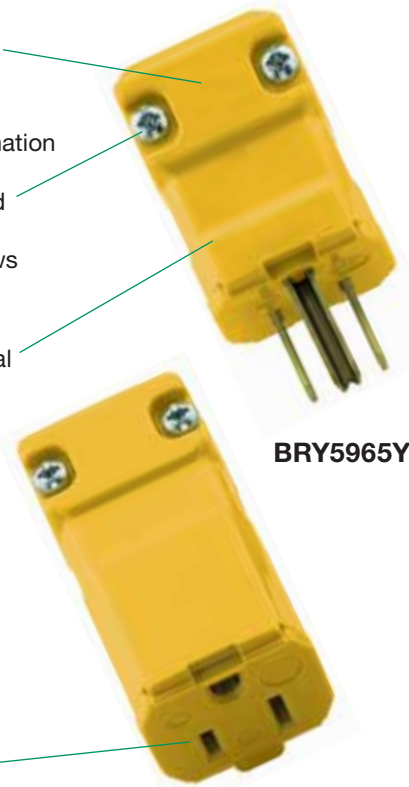

BRY5965Y


BRY5969Y

Internal cord grips prevent conductor slippage

Hinged one piece body opens wide for easy wiring

Clamp type terminals ensure secure wire terminations

Adjustable cord inserts accommodate .220 - .660 in. (5.6 - 16.8mm) diameter cord

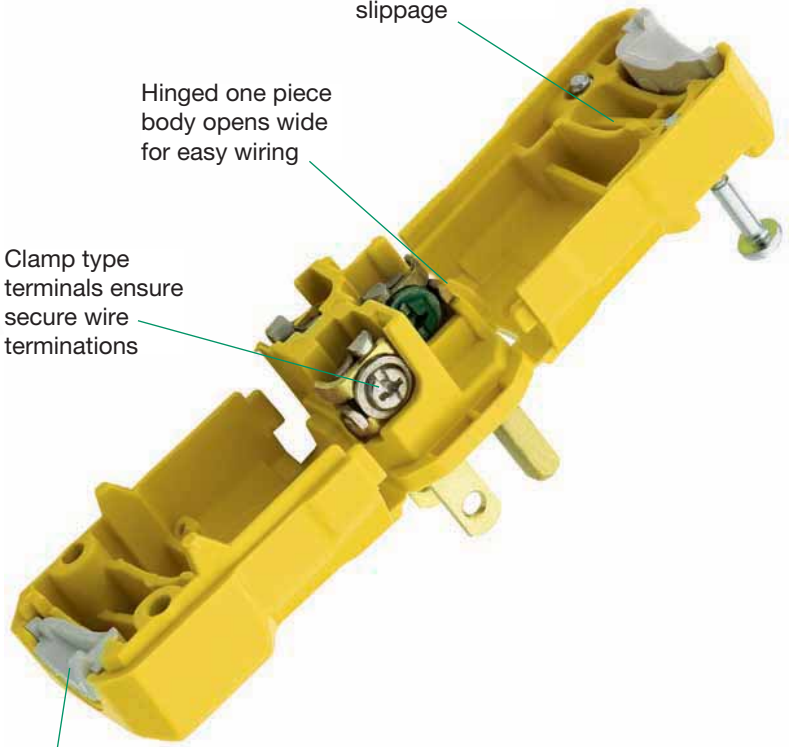

Insulation Displacement Plugs and Connectors

Captive combination Slot/Phillips/Robertson head assembly screws

Accommodates #18/3 SV - #16/3 SJ cord

Impact/chemical resistant nylon construction



5966VBK


5969VBK

One-piece housing opens wide for lay in wiring

Internal cord grips provide secure cord retention

Insulation displacement blades - no terminal screws to tighten - eliminates need to strip individual conductors

As "jaws" clamp down, blades displace the conductor insulation to make proper electrical connections

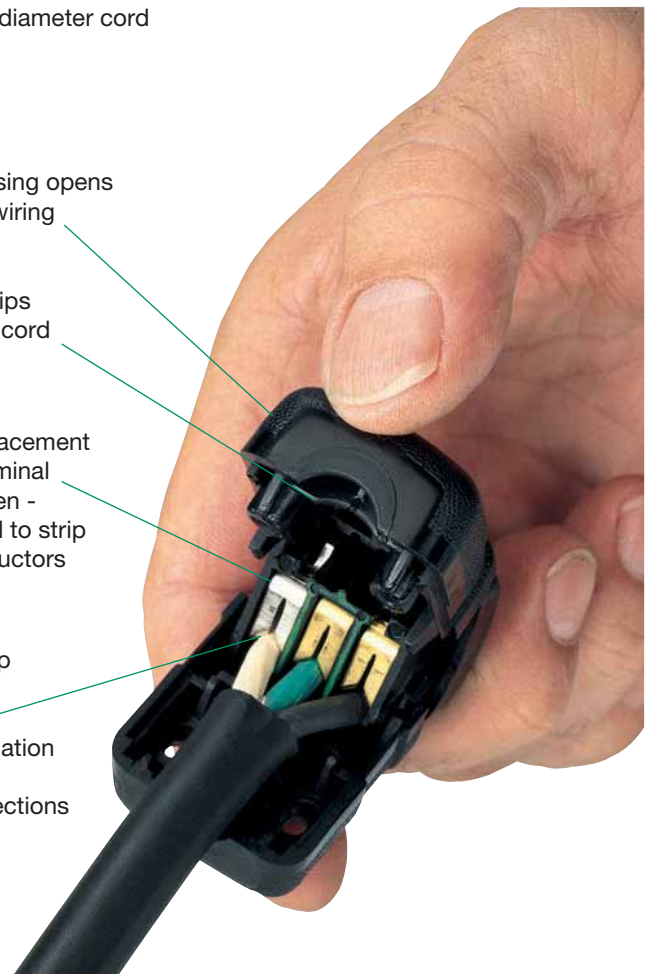

Straight Blade Devices

50 Amp 125V and 250V; 2-Pole 3-Wire and 125/250V AC; 3-Pole 3-Wire



9650NP



9550ANPB



9650NC



9550FR



NEMA 5-50
50A 125V



NEMA 6-50
50A 250V



NEMA 10-50
50A 125/250V AC

PLUGS Inches (mm)

Description	Color	Cord Diameter		Catalog Number
Thermoplastic	Gray	.425-1.320 (10.8-33.5)	—	9650NP 7513NP**

ANGLE PLUGS Inches (mm)

Description	Color	Cord Diameter		Catalog Number
Angle plug; nylon	Black/ White	.625-1.380 (15.9-35.1)	9550ANPB	9650ANPB —
Residential grade; without ground; 3-pole, 3-wire; plugs supplied with interchangeable blades for 30 or 50 amp config.	Black	.600-1.110 (15.2-28.2)	—	RR335P**

CONNECTORS Inches (mm)

Description	Color	Cord Diameter		Catalog Number
Thermoplastic	Gray	.425-1.320 (10.8-33.5)	—	9650NC 7516NC**

FLUSH RECEPTACLES

Description	Color		Catalog Number
RTP*	Black Brown	9550FR	9650FR — 9306**
Isolated ground; RTP*	Orange	9550IG	9650IG —

SURFACE RECEPTACLES

Description	Color		Catalog Number
Phenolic; aluminum enclosure	Black	—	— 3926BRY**
Residential grade; without ground; 3-pole, 3-wire	Black	—	— RR350**

Note: *RTP - Reinforced Thermoplastic Polyester.

**Device has no provision for a grounding conductor. Intended for use in applications where a separate grounding means is provided.

See section O for more information on plates.

Receptacles can be mounted in single or two-gang boxes.

PRODUCT DIMENSIONS Inches (mm)

