

### 22x58mm, Class gG, 400, 500 and 690Vac, 2 to 125 A


Catalog numbers			Rated voltage (Vac)	Amps	Interrupting rating at rated voltage (kA)	Recommended holder/block
Without indicator	With indicator	With striker				
C22G2	C22G2I	-	690	2	80	• CH22 DIN-Rail* • JM70100 modular block
C22G4	C22G4I	C22G4S				
C22G6	C22G6I	C22G6S				
C22G8	C22G8I	C22G8S				
C22G10	C22G10I	C22G10S				
C22G12	C22G12I	C22G12S				
C22G16	C22G16I	C22G16S				
C22G20	C22G20I	C22G20S				
C22G25	C22G25I	C22G25S				
C22G32	C22G32I	C22G32S				
C22G40	C22G40I	C22G40S				
C22G50	C22G50I	C22G50S				
C22G63	C22G63I	C22G63S				
C22G80	C22G80I	C22G80S	500	80	120	
C22G100	C22G100I	C22G100S				
C22G125	C22G125I	C22G125S		400		



\* Not recommended for use with indicator version, use striker version to activate optional, external microswitch.

Data Sheet 720115

### Dimensions - mm

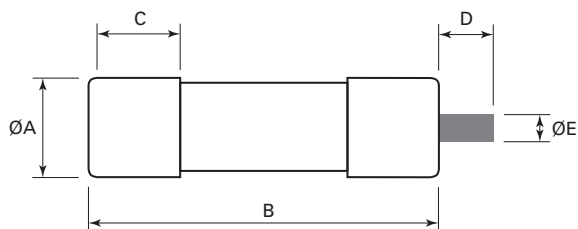

Catalog symbol	Ø A	B	C	Indicator/striker	
				D	Ø E
C08M	8	31.5	6.3	—	—
C10M	10	38	10	—	—
C14M	14.3	51	13	8	4
C22M	22	58	16	8	4

Data Sheet 720115