

Ferrule fuses

Accessories

CH22 modular DIN-Rail mount holders for 22x58 mm fuses

Description

CBussmann series compact DIN-Rail mount fuse holders for 22x58 mm cylindrical fuses. Available in different versions with neutral and microswitch.

Specifications and agency information

- See catalog numbers table below

Mounting

- 35 mm DIN Rail
- Panel mount (2xM4 screws)

Compatible Bussmann series fuses

- FWP (page 38)



Size	Catalog no.		Description	Rated voltage and current	Agency markings	Terminal rating	Rated withstand capacity	Compatible Bussmann series fuses	
	Without indicator	With indicator							
22x58		CH221DNXU -	Neutral holder						
		CH221DU	CH221DIU	1 pole fuse holder					
		CH222DU	CH222DIU	2 pole fuse holder					
		CH223DU	CH223DIU	3 pole fuse holder					
		CH224DU	CH224DIU	4 pole fuse holder					
		CH221DNU	CH221DNIU	1 pole + neutral	690 Vac/125 A 1000 Vdc/125 A	IEC 60269-1 IEC 60269-2	Size: 4 - 50 mm ² Torque: 4 N•m max	120 kA AC 50 kA DC	FWP ferrule ^{1,2}
		—	CH223DNU	CH223DNIU	3 pole + neutral				
		—	CH221DMSU-F	1 pole with microswitch					
		—	CH223DMSU-F	3 pole with microswitch					
		—	CH223DNMSU-F	3 pole with microswitch + neutral					


¹ Maximum allowed continuous current applies. Please refer to data sheet for details.

² Please consult our application engineers if you wish to use a FWP fuse with a striker option.

Accessories

Catalog no.	Description	Unit packing
AL-D	Multi-pole ganging clips, one kit will gang up to 4-poles together	12
CH14-P	Multi-pole handle pins, one kit will gang up to 12 handles together	12
CH22-L	Lockout padlock support, it will accept up to 5 mm diameter padlock shank	5
CH22-IP20	IP20 protection accessory, provides IP20 protection to terminals with 10 mm ² or less cable	12
CH22-MS1	1-pole microswitch accessory, for blown fuse monitoring	5
CH22-MS3	3-pole microswitch accessory, for blown fuse monitoring	3

Dimensions — mm

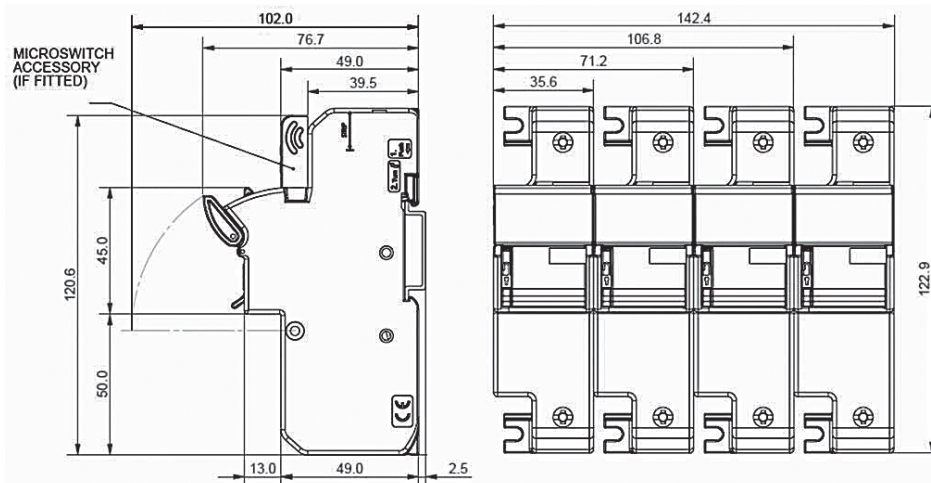

Data sheet: 10115