



Individually molded face for each blade configuration keeps debris out of plug interior


Roomy wiring chamber provides ample space for wiring

Powerful, cord grips clamp on individual conductors and outer cord jacket to prevent strain on terminals

Individual wiring terminals are completely enclosed in their own separate chambers

Ribbed nylon housing provides a secure grip that's impact and chemical resistant

Beveled housing prevents snagging when dragged across uneven surfaces

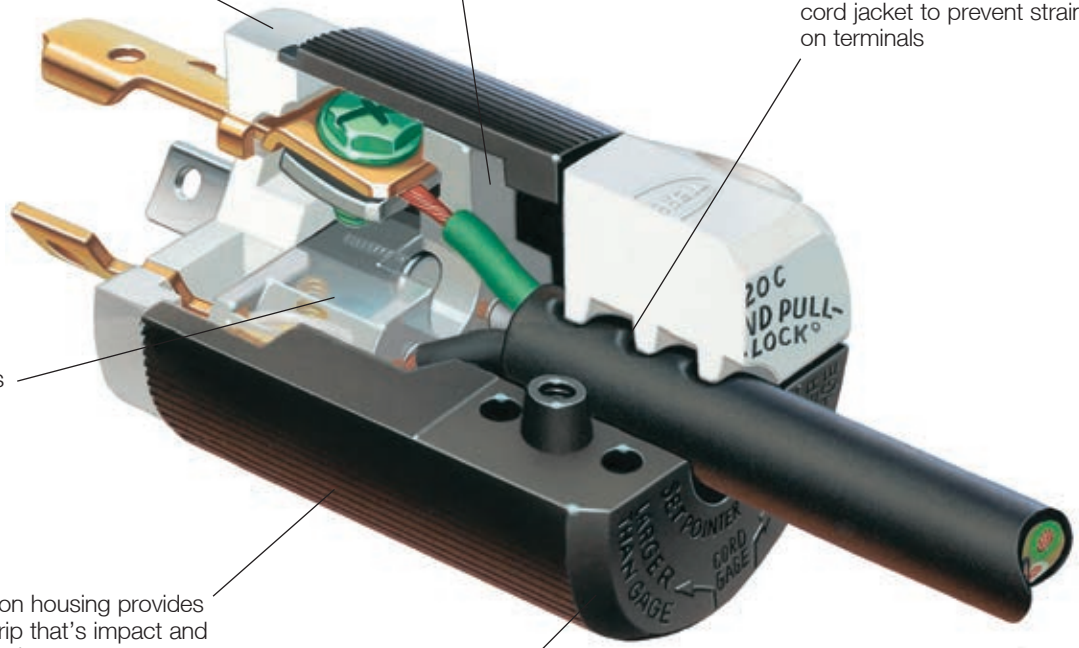

HBL4720C



Integral VARI-SIZE® insert adjusts to a wide range of cord sizes: .230"-.720" (5.8-18.3).



Multiple drive screw heads provide screwdriver versatility. Pocketed recess for cord grip screws deters slippage of the screwdriver.




VARI-SIZE® pointer set to "smaller than gauge" position. Cord diameter range is .230"-.360" (5.8-9.0). Accepts slotted and Phillips head drivers.




Transparent angled wiring entrance holes permit "straight in" conductor insertion and quick visual verification for terminations.



Catalog number is visible on the device while in use for easy identification.



Powerful cord grips clamp on individual conductors and outer cord jacket to prevent strain on terminations.

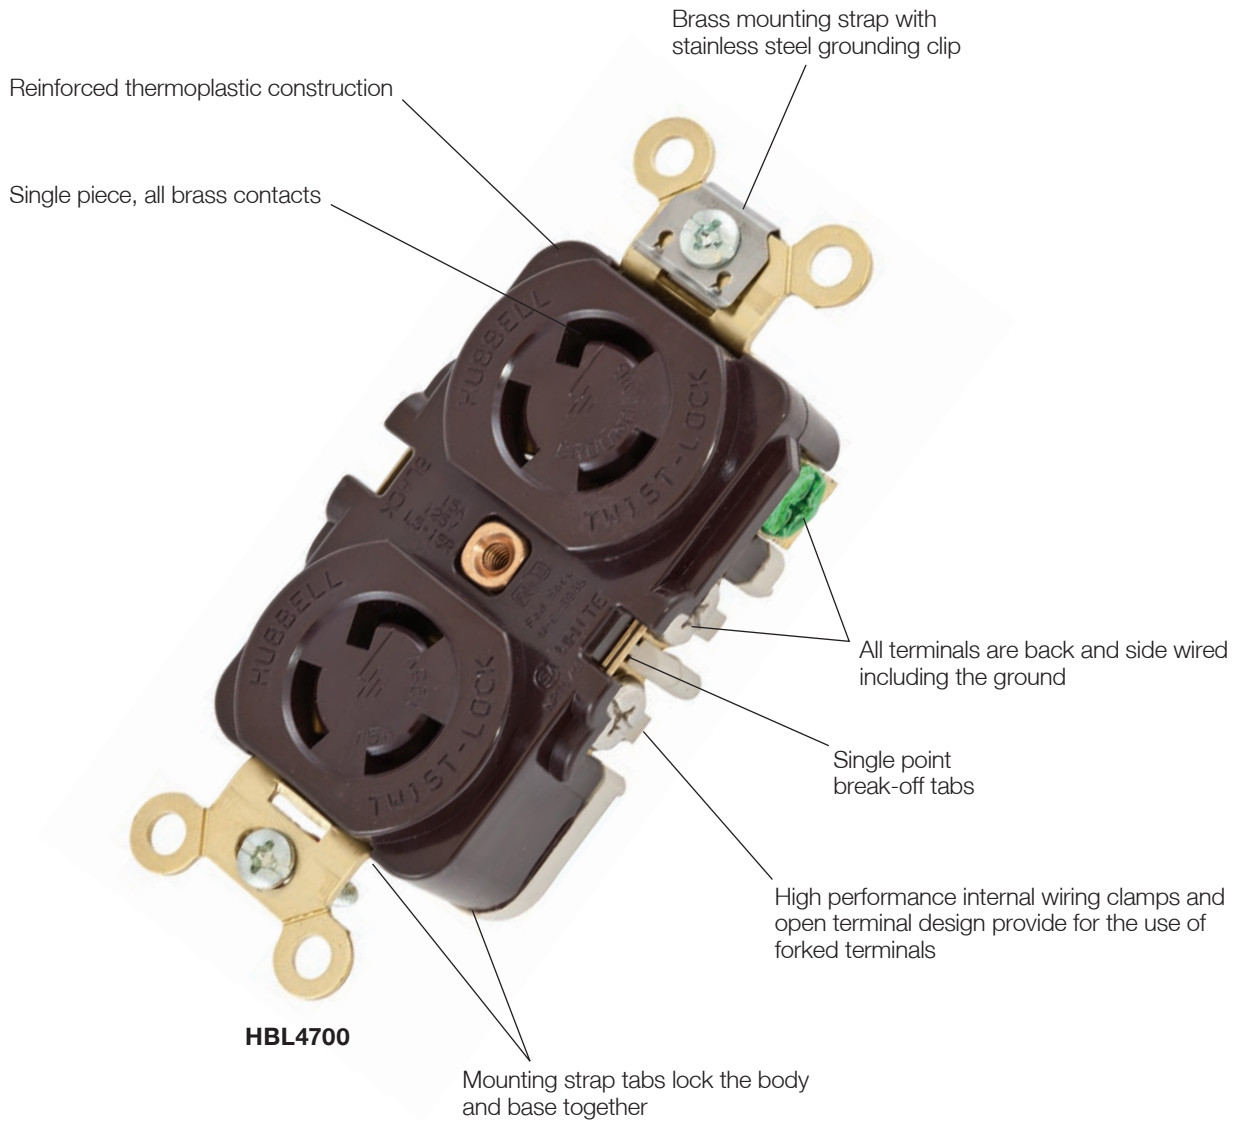

Hubbell Wiring Device-Kellems line of duplex Twist-Lock® receptacles are designed to deliver premium service and longer life. This rugged product design establishes a new standard for 15 amp locking receptacles. A reinforced thermoplastic top and base encapsulates the brass alloy contacts that are locked together for unequalled assembly strength. Wiring and installation is simplified with back and side wire terminations, integral wire restraints, and combination head screws. The integral split circuit capability offers flexibility. Available in 2 pole, 3 wire configurations including isolated ground and corrosion resistant versions.

Benefits

- High impact and heat resistance provides maximum safety and longer life.
- Superior spring characteristics for increased contact force, secure connections and longer life.
- High-conductivity, corrosion resistant material for reliable, low resistance to fault currents.
- Easy and reliable installation for stranded and solid wire.
- Features split circuit capability in the field.
- The assembly locks together to make the most abuse resistant receptacle ever.



IP20
 SUITABILITY




15A 125V
NEMA L1-15P
 UL Listed
 0.5 HP

Plugs

Description	Cord Dia.	Catalog Number
Black and white nylon, polarized. Multiple drive screws.	.230"-.720" (5.8-18.3)	HBL7545C

Note: See page B-49 for accessories.



HBL7545C


Flanged Inlets

Description	Catalog Number
Nylon casing, polarized, backwired, Multiple drive screws.	HBL7524C

Note: See page B-48 for accessories.



15A 125V
NEMA L1-15R
 UL Listed
 0.5 HP



HBL7524C

Connector Bodies

Description	Cord Dia.	Catalog Number
Black and white nylon. Multiple drive screws.	.230"-.720" (5.8-18.3)	HBL7506C

Note: See page B-49 for accessories.



HBL7506C

Receptacles


Description	Catalog Number
Duplex, flush, black phenolic.	HBL7540
Single, flush, black phenolic.	HBL7535
Single, panel mount, 1 ⁵ / ₁₆ " (49.2) centers, black phenolic.	HBL7498

Note: See pages B-48 and B-49 for accessories.


Flanged Receptacles

Description	Catalog Number
Insulgrip nylon casing, backwired. Multiple drive screws.	HBL7526C
Metal flange, stainless steel casing, black phenolic, exposed terminals.	HBL7526


Note: See pages B-48 and B-49 for accessories.
 Only receptacles and plugs are HP rated.
 HP ratings are AC only.




HBL7540



HBL7526C



HBL7498



HBL7535

Dimensions in Inches (mm)