

TECHNICAL SPECIFICATIONS

Hard Use Specification Grade Receptacles

Back & Side Wire 2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

Typical Specifications

Manufacturer's Identification: Pass & Seymour® 5262

Description: Straight Blade Duplex Receptacle – Hard Use Specification Grade

Type: 2 Pole, 3 Wire Grounding


Rating: 15A, 125V

3rd Party Compliance: UL Listed, File Number E140596, Standard UL498, Federal Specification



WC596. CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.27. Conforms to NEMA WD-1 and WD-6.

CATALOG NUMBER	COLOR	RATING	NEMA CONFIG. NO.	CATALOG NUMBER	COLOR	RATING	NEMA CONFIG. NO.
<input type="checkbox"/> 5262I	Ivory	15A 125V	5-15R	<input type="checkbox"/> 5362BK	Black	20A 125V	5-20R
<input type="checkbox"/> 5262W	White	15A 125V	5-15R	<input type="checkbox"/> 5362RED	Red	20A 125V	5-20R
<input type="checkbox"/> 5262	Brown	15A 125V	5-15R	<input type="checkbox"/> 5362LA	Lt. Almond	20A 125V	5-20R
<input type="checkbox"/> 5262GRY	Gray	15A 125V	5-15R	<input type="checkbox"/> 5362BL	Blue	20A 125V	5-20R
<input type="checkbox"/> 5262BK	Black	15A 125V	5-15R	<input type="checkbox"/> 5362GN	Green	20A 125V	5-20R
<input type="checkbox"/> 5262RED	Red	15A 125V	5-15R	<input type="checkbox"/> 5362OR	Orange	20A 125V	5-20R
<input type="checkbox"/> 5262LA	Lt. Almond	15A 125V	5-15R	<input type="checkbox"/> 5290I*	Ivory	15A 125/250V	5/6-15R
<input type="checkbox"/> 5262BL	Blue	15A 125V	5-15R	<input type="checkbox"/> 5290*	Brown	15A 125/250V	5/6-15R
<input type="checkbox"/> 5362I	Ivory	20A 125V	5-20R	<input type="checkbox"/> 5890I*	Ivory	20A 125/250V	5/6-20R
<input type="checkbox"/> 5362W	White	20A 125V	5-20R	<input type="checkbox"/> 5890W*	Wwhite	20A 125/250V	5/6-20R
<input type="checkbox"/> 5362	Brown	20A 125V	5-20R	<input type="checkbox"/> 5890*	Brown	20A 125/250V	5/6-20R
<input type="checkbox"/> 5362GRY	Gray	20A 125V	5-20R				

*Side wire only.



15 & 20 Amp



Performance

Electrical

- Dielectric Voltage: Withstands 2000V minimum
- Maximum Working Voltage: 250V
- Current Interrupting: Certified for current interrupting at full-rated current
- Temperature Rise: Max 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

- Terminal Identification: Terminal Identification in accordance with UL498 (Brass, White, Green)
- Terminal Accommodation: #14 – #10 AWG copper conductor only
- Product Identification: Ratings are a permanent part of the device

Environmental

- Flammability: UL94 V2
- Operating Temperature: Maximum continuous +60°C, minimum -40°C (without impact)

Materials

- Face: Nylon
- Back Body: PVC
- Contacts: .032" (.8) Brass
- Clamping Plate: .080" Steel
- Mounting Strap: .042" Steel
- Terminal Screws: Tri-Drive Brass
- Hex Head
- Grounding Screw: Tri-Drive Zinc-Plated Steel
- Assembly Rivets: Steel
- Auto-Ground Clip: Stainless Steel
- Mounting Screws: Tri-Drive Steel

Consult Straight Blade Section B for complete compliance listing.

Project
Location/Type


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors



Ivory Light Almond White Green Antique Brass Dark Bronze Nickel

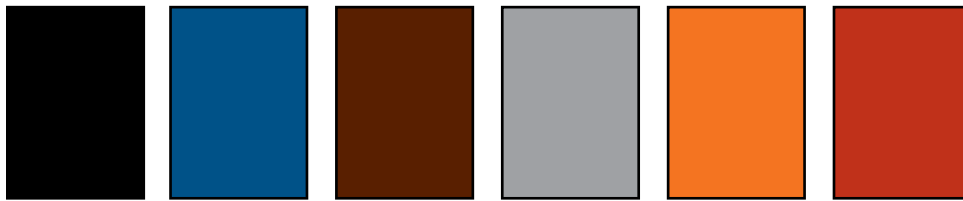

Black Blue Brown Gray Orange Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates


Metal Finish




Aluminum Brass (Brushed) Polished Brass Stainless Steel Brushed Bronze Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

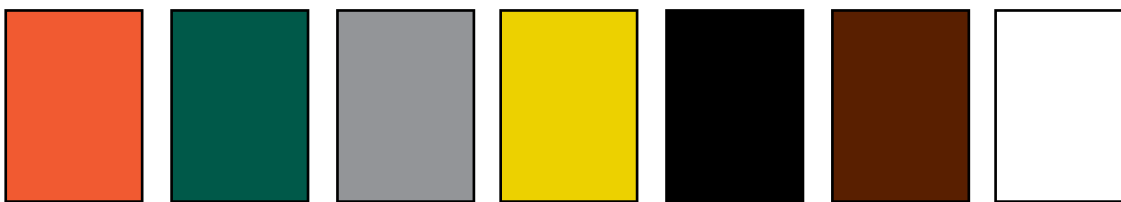

Orange Green Gray Yellow Glossy Black Brown White

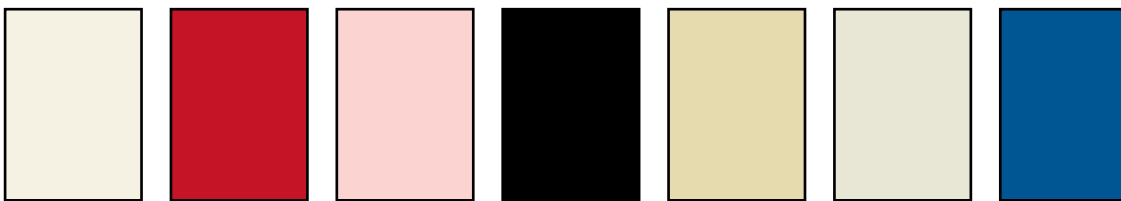

Primer Red Pink Flat Black Ivory Light Almond Blue

To order custom metal wall plates, see Pages P-40 – P-42.
For additional colors consult factory.