

Screw-Holding Screwdrivers

Phillips-Tip Screw-Holding Screwdrivers

- Blade separates to hold the fastener.
- Not designed for torquing or tightening.
- Positive gripping action holds and starts Phillips screws in awkward, hard to reach places.

Cat. No.	Overall Length	Weight (lbs.)
K14	5" (127 mm) pocket clip	.05
K16	7" (178 mm)	.05
K19	9" (229 mm)	.05



K16

Offset Screwdrivers

Slotted-Tip Offset Screwdrivers

- Designed for confined hard-to-reach applications.
- Two tip sizes for added convenience.

Cat. No.	For Screw Nos.	Overall Length	Tip Width	Weight (lbs.)
V01	2 to 6	3" (76 mm)	3/16" (5 mm)	.01
V02	6 to 10	4-1/4" (108 mm)	1/4" (6.3 mm)	.05
V03	8 to 12	5" (127 mm)	5/16" (8 mm)	.11
V04	12 to 16	6" (152 mm)	3/8" (9.5 mm)	.25




V01

Phillips-Tip Offset Screwdrivers

- Designed for confined hard-to-reach applications.
- Two tip sizes for added convenience.

Cat. No.	Point Nos.	Overall Length	Weight (lbs.)
P120	No. 1 and No. 2	4-3/4" (121 mm)	.05
P230	No. 2 and No. 3	5-1/2" (140 mm)	.15
P340	No. 3 and No. 4	6" (152 mm)	.20

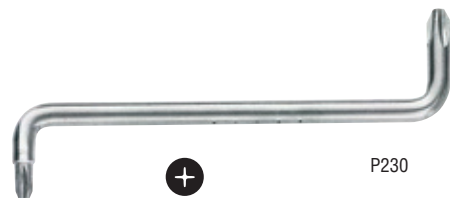


P230

Combination-Tip Offset Screwdriver

- Designed for confined hard-to-reach applications.
- Two tip sizes for added convenience.

Cat. No.	For Screw Nos.	Overall Length	Tip Width	Weight (lbs.)
V05	1/4" slotted No. 2 Phillips	5" (127 mm)	1/4" (6.3 mm)	.05

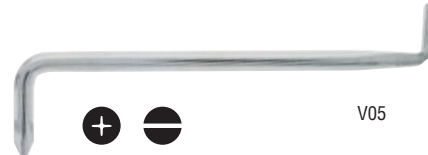


V05

2-Piece Offset Screwdriver Set

- Designed for confined hard-to-reach applications.
- Two tip sizes for added convenience.

Cat. No.	Set Contains	Weight (lbs.)
210122	P120 (No. 1 and No. 2 Phillips-tip) and V02 (1/4" to 5/16" slotted tip)	.10

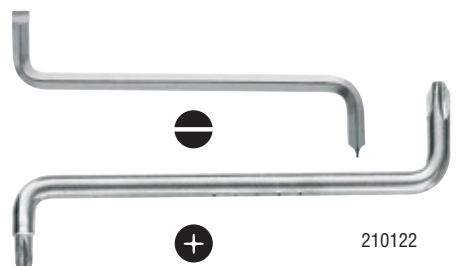

210122

All dimensions are in inches and (millimeters).

▲WARNING: Always wear approved eye protection.

▲WARNING: Never use on or near live electrical circuits.

▲WARNING: NOT insulated. Will NOT protect against electrical shock.

▲WARNING: Do NOT use to pry or chisel.

