



**Product Selection**

**Direct Operation**



**External Operation**

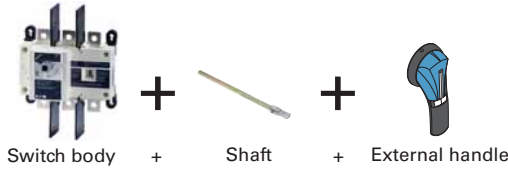

**R9 Series Non-Fusible 100–1200A**



Ampere Rating (Frame)	Number of Poles	Switch Body Only	Direct Handle	Door Interlocked External Pistol Handle (Choose One)	Shaft Extensions for External Handle—In (mm) (Choose One)	Auxiliary Contacts	Terminal Screens (Choose One)	Terminal Lugs <sup>③</sup>		
100 (D Frame)	3	<b>R9D3100U</b>	<b>DHR9DE</b>	Size 2, Black 1, 3R, 12 Defeatable <b>PHB2N12F</b>	7.90 (200.0)	<b>1NO + 1NC</b> <b>AC1N0NCDE</b> <b>AC1N0NCDELL</b>	3-pole, Line side only <b>TS3R9DT</b>	<b>LK3R9DL</b>		
	4	<b>R9D4100U</b>			<b>SF200PH10X10</b>			<b>LK4R9DL</b>		
200 (D Frame)	3	<b>R9D3200U</b>	<b>DHR9DE</b>	Size 2, Red 1, 3R, 12 Defeatable <b>PHR2N12F</b>	12.60 (320.0)	<b>2NO + 2NC</b> <b>AC2N0NCDE</b> <b>AC2N0NCDELL</b>	3-pole, Load side only <b>TS3R9DB</b>	<b>LK3R9DL</b>		
	4	<b>R9D4200U</b>			<b>SF320PH10X10</b>			<b>LK4R9DL</b>		
400 (E Frame)	3	<b>R9E3400U</b>	<b>DHR9DE</b>	Size 2, Black 4, 4X Defeatable <b>PHB2N4XF</b>	15.70 (400.0)	<b>1NO AC U Type</b> <b>AC1N0R9</b> <sup>②</sup>	4-pole, Line or load side <b>TS4R9DTB</b>	<b>LK3R9EM</b>		
		4			<b>R9E4400U</b>			<b>SF400PH10X10</b>	<b>LK4R9EM</b>	
	4	<b>R9E3400U</b>			Size 2, Red 4, 4X Defeatable <b>PHR2N4XF</b>		19.70 (500.0)	<b>1NC AC U Type</b> <b>AC1NCR9</b> <sup>②</sup>	3-pole, Line side only <b>TS3R9ET</b>	<b>LK3R9EM</b>
		<b>R9E4400U</b>					<b>SF500PH10X10</b>			<b>LK4R9EM</b>
600 (F Frame)	3	<b>R9F3600U</b>	<b>DHR9FG</b>	Size 3, Black 4, 4X Defeatable <b>PHB3N4XF</b>	7.90 (200.0)	<b>1NO AC U Type</b> <b>AC1N0R9</b> <sup>②</sup>	<b>TS3R9F</b> <sup>①</sup>	<b>LK3R9FN</b>		
	4	<b>R9F4600U</b>			<b>SF200PH15X12</b>			<b>LK4R9FN</b>		
800 (G Frame)	3	<b>R9G3800U</b>	<b>DHR9FG</b>	Size 3, Red 4, 4X Defeatable <b>PHR3N4XF</b>	12.60 (320.0)	<b>1NC AC U Type</b> <b>AC1NCR9</b> <sup>②</sup>	<b>TS3R9G</b> <sup>①</sup>	<b>LK6R9G</b>		
	4	<b>R9G4800U</b>			<b>SF320PH15X12</b>			<b>LK8R9G</b>		
1000 (G Frame)	3	<b>R9G31000U</b>	<b>DHR9FG</b>	Size 3, Red 4, 4X Defeatable <b>PHR3N4XF</b>	1.70 (400.0)	<b>1NC AC U Type</b> <b>AC1NCR9</b> <sup>②</sup>	<b>TS4R9G</b> <sup>①</sup>			
	4	<b>R9G41000U</b>			<b>SF400PH15X12</b>					
1200 (G Frame)	3	<b>R9G31200U</b>	<b>DHR9FG</b>	Size 4, Black 4, 4X Defeatable <b>PHB4N4XF</b>	19.7 (500.0)	<b>1NC AC U Type</b> <b>AC1NCR9</b> <sup>②</sup>	<b>TS4R9G</b> <sup>①</sup>			
	4	<b>R9G41200U</b>			<b>SF500PH15X12</b>					
				Size 4, Red 4, 4X Defeatable <b>PHR4N4XF</b>						

**Notes**

- ① Top (line side) supplied as standard.
- ② Auxiliary contact requires holder (catalog number ACHFG) when used on F and G Frame switches (non-fusible 600–1200A).
- ③ Each catalog number is for line or load side. For both line and load, please order two sets.

DC Rated Disconnects




Features


- Switching technology
- Up to 600 Vdc according to UL 98/CSA
- Up to 1000 Vdc according to IEC 947-3

R9 Series DC Rated Disconnects

Product Selection

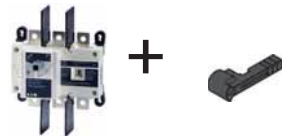


Switch body + Direct handle

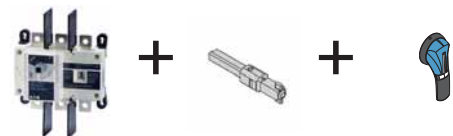

Switch body + Shaft + External handle

Front Operation—Three- and Four-Pole



Ampere Rating	Number of Poles	Switch Body	Direct Handle	External Handle (Choose One)	Shaft for External Handle In (mm) (Choose One)	Auxiliary Contacts (Choose One)	Terminals Shroud	Terminal Lugs	Jumpers for Connecting Poles in Series
100	3	<b>R9D3100UDC</b>	<b>DHR9DE</b>	S2 Type	7.90 (200.0)	C Type	3P ②	3P ④	2 pieces
	4	<b>R9D4100UDC</b>		Black	<b>SF200PH10X10</b>	1st Contact	<b>TS3R9DT</b>	<b>LK3R9DL</b>	<b>DCJUMP2</b>
200	3	<b>R9D3200UDC</b>		Black	12.60 (320.0)	NO+NC	3P ③	4P ④	3 pieces
	4	<b>R9D4200UDC</b>		<b>PHB2N12F</b>	<b>SF320PH10X10</b>	<b>AC1NONCDE</b>	<b>TS3R9DB</b>	<b>LK4R9DL</b>	<b>DCJUMP3</b>
400	3	<b>R9E3400UDC</b>		Red/Yellow	15.7 0 (400.0)	2nd Contact	4P ④		
	4	<b>R9E4400UDC</b>		<b>PHR2N12F</b>	<b>SF400PH10X10</b>	<b>AC2NONCDE</b>	<b>TS4R9DTB</b>		
				Black					
				4, 4X ①					
				<b>PHB2N4XF</b>					
							3P ②	3P ④	2 pieces
							<b>TS3R9ET</b>	<b>LK3R9EM</b>	<b>DCJUMPE2</b>
							3P ③	4P ④	3 pieces
							<b>TS3R9EB</b>	<b>LK4R9EM</b>	<b>DCJUMPE3</b>
							4P ④		
							<b>TS4R9ETB</b>		

Notes

- ① Defeatable handle.
- ② Top (line side).
- ③ Bottom (load side).
- ④ Top or bottom (line or load side).