



T5 Preheat

F6T5/CW PH 25PK

Philips T5 Fluorescent Lamps are incredibly powerful, environmentally responsible, long life lamps with an ultra-slim profile. This translates into reduced maintenance and disposal costs and also allows the use of smaller fixtures—which reduces ceiling clutter.

Warnings and Safety

• Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050


Product data

| General Information | | Lamp Current (Nom) | | Voltage (Nom) | |
|------------------------------------|-----------------|---------------------------------|------------------|---------------|------|
| Base | G5 [G5] | | 0.160 A | | 42 V |
| Life To 10% Failures (Nom) | 5000 h | Controls and Dimming | | | |
| Life to 50% Failures (Nom) | 10000 h | Dimmable | Yes | | |
| Life to 50% Failures Preheat (Nom) | 10000 h | Mechanical and Housing | | | |
| System Description | na [-] | Bulb Shape | T5 [16 mm (T5)] | | |
| Light Technical | | Approval and Application | | | |
| Color Code | 33-640 | Energy Efficiency Label (EEL) | B | | |
| Initial lumen (Nom) | 260 lm | Mercury (Hg) Content (Nom) | 4.4 mg | | |
| Color Designation | Cool White (CW) | Energy Consumption kWh/1000 h | 7 kWh | | |
| Lumen Maintenance 10000 h (Nom) | 58 % | Product Data | | | |
| Lumen Maintenance 2000 h (Nom) | 75 % | Order product name | F6T5/CW FAM/25 | | |
| Lumen Maintenance 5000 h (Nom) | 70 % | EAN/UPC - Product | 046677114633 | | |
| Correlated Color Temperature (Nom) | 4100 K | Order code | 332411 | | |
| Luminous Efficacy (rated) (Nom) | 43 lm/W | Numerator - Quantity Per Pack | 1 | | |
| Color Rendering Index (Nom) | 60 | Numerator - Packs per outer box | 25 | | |
| Operating and Electrical | | | | | |
| Power (Rated) (Nom) | 6.0 W | | | | |

T5 Preheat

| | |
|---------------------|-----------------|
| Material Nr. (12NC) | 928000503321 |
| Net Weight (Piece) | 21.000 g |
| ILCOS Code | FD-6/41/2B-E-G5 |


Dimensional drawing




| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|----------------|---------|----------|----------|----------|----------|
| F6T5/CW FAM/25 | 16 mm | 212.1 mm | 219.2 mm | 216.8 mm | 226.3 mm |

TL Mini 6W/33-640

Photometric data

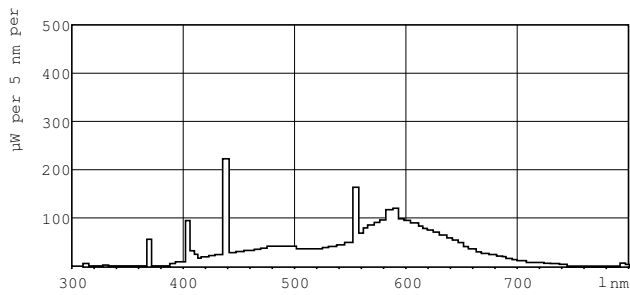

LDPB_TL-MINI_33-640-Spectral power distribution B/W

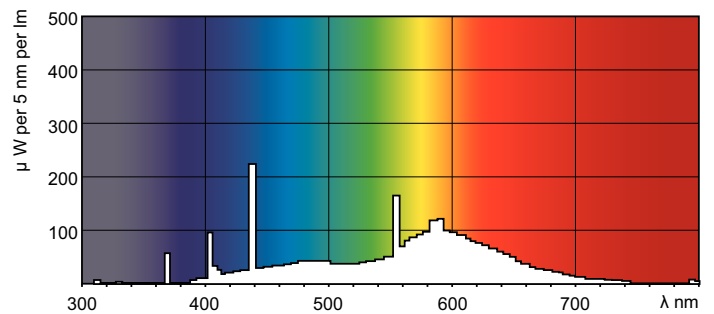

LDPO_TL-MINI_33-640-Spectral power distribution Colour

