



Decora Lighting Controls

SureSlide™ Decora Full Range Slide Dimmers 120V 60Hz AC Only Incandescent

DESCRIPTION	CAT. NO.	RATING	COLOR* <small>Basic Cat. No. Denotes Brown</small>
SureSlide Single-Pole	6621	600W	I, W, GY, A
SureSlide Single-Pole with Preset ON/OFF Switch	6621-P	600W	I, W, GY, E, A
SureSlide Single-Pole Illuminated	6631	600W	I, W
SureSlide Single-Pole Illuminated, with Preset ON/OFF Switch	6631-P	600W	I, W
SureSlide 3-Way with Preset ON/OFF Switch	6623-P	600W	I, W, GY, E, A
SureSlide 3-Way Illuminated, with Preset ON/OFF Switch	6633-P	600W	I, W
SureSlide Dual Slide Dimmer—(2) Single-Pole Loads, Incandescent or Magnetic Low-Voltage	6628	300W or 300VA per circuit; 600W/600VA Total	I, W, A, GY (No Brown)

Magnetic Low-Voltage

SureSlide Single-Pole with Preset ON/OFF Switch	6611-P	600VA (450W)	I, W, GY, E, A
SureSlide 3-Way with Preset ON/OFF Switch	6613-P	600VA (450W)	I, W, GY, E, A

Advance Mark X/Philips Dimmable Earthlight®

SureSlide Single-Pole	6668-1	500W 120V Mark X 350W 120V Philips dimmable Earthlight	I, W (No Brown)
-----------------------	--------	---	-----------------

Full-Range Fan Speed Controls

SureSlide Single-Pole	6627	5 Amps	I, W
SureSlide Single-Pole with Preset ON/OFF	6627-P	5 Amps	I, W, A, G, E
SureSlide 3-Way with Preset ON/OFF	6637-P	5 Amps	I, W, A, G, E

Quiet Step Fan Speed Controls

			<small>Brown Not Available</small>
SureSlide Single-Pole Quiet Step	6629-P	1.5 Amps	I, W, A, GY
SureSlide 3-way Quiet Step	6629-3	1.5 Amps	I, W, A, GY
SureSlide Dual Quiet Fan Speed and Fixture Dimmer	6630	1.5A Fan/ 300W Fixture	I, W, A, GY
Trimatron Decora-Style Quiet Fan Speed Control	6639	1.5 Amps	I, W, A


All devices are UL Listed and CSA Certified.

Use Leviton Power Extenders to extend the load capacity of box-mounted dimmers. Leviton Power Extenders are available for incandescent, magnetic low-voltage, electronic low-voltage, Advance Mark X™ fluorescent dimming ballasts or equivalents, and 0–10 VDC dimmable fluorescent ballasts such as Advance Mark VII™, OSRAM Sylvania Quicktronic Helios or equivalent ballasts.

See Page O6 for more information on Leviton Power Extenders

CAUTION ON RETROFITS: When retrofitting Mark X dimming ballasts into fixtures that originally had Instant Start ballasts, the sockets MUST be replaced with Rapid Start sockets to allow proper dimmer operation and prevent damage to the dimming ballast. Refer to the instructions provided with the ballast and the Leviton Mark X dimmer.

For IllumaTech Fan Speed Controls and Quiet Fan Speed Controls, see pages A22–A24.

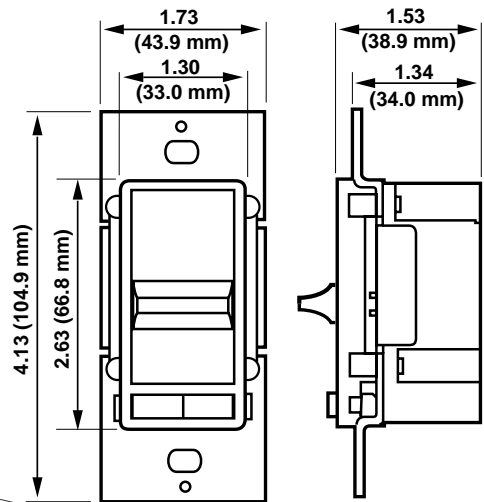

SURESLIDE PRESET DIMMER
Cat. No. 6621-P



6621-PW



6621-W

SPECIFICATIONS & FEATURES

- All SureSlide devices have a permanently mounted smooth-action integrated linear slide control for easy, precise operation
- SureSlide features a slim, compact housing that fits easily into a standard wallbox and is suitable for multi-gang installations
- Preset versions provide single-pole (one-location) and multi-location lighting control when used with a 3-way switch
- SureSlide's attractive Decora styling coordinates perfectly with Leviton's complete line of Decora wiring devices
- Compatible with Decora screwless and Decora standard designer wallplates
- Built-in radio/TV interference filter
- Quiet 1.5 Amp Fan Speed Controls are ideal for libraries, study rooms and any area where ceiling fan noise could become distracting. Full range 5-amp fan speed controls also available
- SureSlide Cat. No. 6668 is specially designed to work with the Philips Dimmable Earthlight®
- Preset versions provide a low-end trim adjustment for precise lamp brightness and fan speed at the low-end settings

TESTING & CODE COMPLIANCE

- UL Listed (File #E-31373)
- CSA Certified (File #LR-3413)
- Backed by a Limited Two-Year Warranty

*COLOR

Basic Cat. No. denotes Brown unless otherwise stated. Add suffix to catalog number as follows for other colors: Ivory (-I), White (-W), Gray (-GY or G), Black (-E), and Almond (-A).

MATERIAL CHARACTERISTICS

Environmental: Flammability UL-94, V2 Rating
Operating Temperature: 32°F to 130°F