

CPRNP-2 PLASTIC COMBO RUNNING MAN STANDALONE



The CPRNP-2 commercial plastic combination running man sign is designed using durable and lightweight high impact thermoplastic. Combination sign with a canopy quick snap for a decorative look or a flush mount for rigid installation.

FEATURES & SPECIFICATIONS

CIRCUITRY

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 120V/0.46A 3.93W; 347V/0.37A 3.27W max power consumption
- Dry or damp location
- Ambient temperature 10°C to 35°C
- 90 minutes emergency power duration standard




- Two 1W LED heads
- Push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, Ni-Cad battery

MECHANICAL

- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Universal faces
- Universal mounting
- White colour is standard
- Fully adjustable, high impact thermoplastic round LED heads are standard

COMPLIANCE

- CSA Certified to C22.2 #141-15, C860
- Meets requirements of ICES-005

OVERVIEW			
LIGHT SOURCE		LED	INPUT VOLTAGE [VAC]
			120/347
	QUICKSHIP		

CPRNP-2

QUICK SHIP ORDERING GUIDE




PART NUMBER	DC VOLTS [VDC]	WATTS [W]	NBR OF FACES	NBR OF HEADS	HEAD	LAMP [W]	LIGHT SOURCE	INPUT VOLTS [VAC]	COLOUR
CPRNP-2	N/A	N/A	UNIVERSAL	2	N/A	1	LED	120/347	WHITE

QUICK SHIP: Product availability is subject to change without notice. Please contact your AimLite customer service representative to confirm inventory levels at time of order.

ACCESSORIES

Flush wall mount backplate. Use for direct wall mount (no canopy required) Spider knock-out for wall-mount





Universal canopy





DIMENSIONS

Flush mount

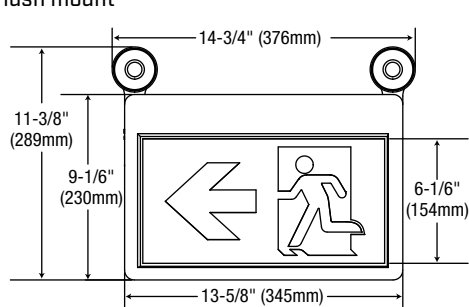

Tapered mount

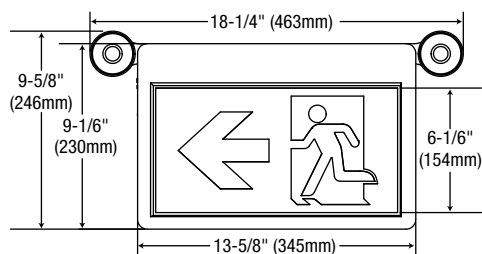

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.