


CATALOG #	TYPE
PROJECT	DATE
PREPARED BY	DATE

# PRODUCT CODE: CL106P-114WM-PF3N

# **4 INCH APERTURE CLOSET LIGHT SURFACE MOUNT**



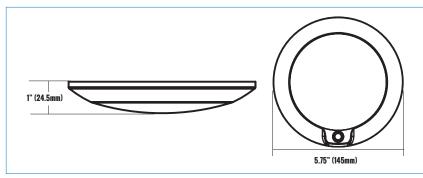



# PRODUCT DESCRIPTION

The New Etlin-Daniels Ultra-Low-Profile LED Closet Light CL106P-114WM-PF3N offers the latest in compact design, energy savings. performance and auto on/off function with the improved range built-in PIR Sensor. At only 1" in depth and 5.7" in width, and with our new metal-backed housing to better dissipate what little heat the diode array may produce, and with frosted polycarbonate diffuser, our new Closet Light is a serious upgrade from our previous 9W version. The new design with 14.5W and 900lm also has an upgraded PIR sensor built in to ensure that lighting is not accidentally left on in whatever application you choose for this fixture. The dual sized and pre-cut keyless slot rear profile allows for quick mounting to both 3" and 4" j-boxes. The new 114WM design is the perfect solution to illuminate closets, garbage rooms. small storage rooms, basements, residential garages - anywhere a typical fixture may be left on when the space is vacated. The ultrathin housing will not impede any activity in the small space and the new 900lm light levels will better provide proper light levels for not only storage, but also function.

# **FEATURES**

- · LED Indoor Light Source
- Surface mount, low profile 1" housing.
- · Frosted polycarbonate lens for even illumination.
- · Damp location rated.
- Reaction range 100° / Reaction distance 4 meters.
- · Keyless slot mounting to j-box.
- · PIR Sensor built in.
- · 5 year warranty.
- · L70 50.000 hours.
- · Energy Star certified.

#### PRODUCT SPECIFICATIONS (OPTICAL DATA)

#### **PRODUCT SPECIFICATIONS (ELECTRICAL DATA)**

SYSTEM EFFICACY	LUMENS	COLOR TEMPERATURE	CRI	VOLTAGE	POWER FREQ.
62.07LM/W	900LM	3000K	>80CRI	120V	60НZ

#### PRODUCT SPECIFICATIONS

WATTAGE	FIXTURE MATERIAL	LIFE SPAN	PRODUCT DIMENSIONS	CARTON SIZE		
14.5W	PC PLASTIC / METAL	>50,000 HOURS	5.75 x 1 INCHES (145 x 24.5 MM)	6.125 X 6.125 X 1.375 INCHES (155 X 155 X 35 MM)		
			INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE	

ADDITIONAL INFORMATION	INSTALLATION METHOD	FIXTURE COLOR/DIFFUSER	CONTROL TYPE	
	CEILING MOUNT	WHITE MATTE / FROSTED	NON-DIMMABLE PIR SENSOR	




CATALOG #	TYPE
PROJECT	DATE
PREPARED BY	DAIL

PRODUCT CODE: CL106P-114WM-PF3N

# **4 INCH APERTURE CLOSET LIGHT SURFACE MOUNT**

# **LUMINAIRE PHOTOMETRIC (TEST REPORT)**

ШШМ	NANCE (AT A DIS	TANCE) - FLUX OUT: 727.3LI	И
3.28FT 1M	105.3, 358.4LX		9.44FT 2.88M
6.56FT 2M	26.33, 89.60LX		18.93FT 5.77M
9.84FT 3M	11.70, 39.82LX		28.41FT 8.66M
13.12FT 4M	6.583, 22.40LX		37.89FT 11.55M
16.40FT 5M	4.213, 14.34LX		47.37FT 14.44M
19.69FT 6M	2.926, 9.955LX		56.85FT 17.33M
22.97FT 7M	2.149, 7.314LX		66.30FT 20.21M
26.25FT 8M	1.646, 5.600LX		75.78FT 23.10M
29.52FT 9M	1.300, 4.424LX		85.26FT 25.99M
32.80FT 10M	1.053, 3.584LX		94.75FT 28.88M
HT	EAVG/EMAX	ANGLE: 110.60DEG	DIA

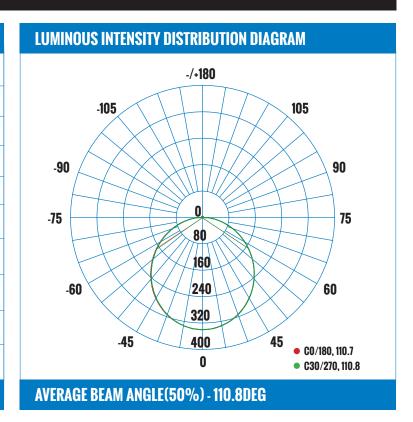

# CERTIFICATIONS







# **CONTROL**



# **ORDERING INFORMATION - CL SERIES**

SERIES	SIZE	CONTROL Type	VOLTAGE	WATTAGE	FINISH	DIFFUSER	COLOR TEMPERATURE	DIMMABLE
CL10	6	P	1	14	WIM	PF	3	N
CL10 - CLOSET LIGHT	6 - 6 INCH	P = PIR SENSOR	1=120V	14=14W	WH=WHITE MATTE	PF - PC FROSTED	3 = 3000K	N = NO