


### Commercial Spec Grade Receptacles

#### Specifications and Features

- Large-head, triple-drive terminal screws, backed out and staked, accept No. 10 copper or copper clad wire
- Back-wiring clamps accept up to No. 10 copper or copper-clad wire
- Heavy-Duty brass power contacts for maximum conductivity and plug retention
- Heavy-gauge, rust-resistant steel mounting strap
- Shallow design for maximum wiring room in box
- Convenient washer-type break-off plaster ears for best flush alignment
- Captive mounting screws for fast installation
- Break-off tabs on duplex receptacles for easy two circuit conversion
- Backed by a Limited Ten-Year Warranty

#### Back and Side Wired, Self-Grounding


Description	Color	Cat. No.	Cat. No.	Cat. No.	Cat. No.
<b>NEMA</b>					
		5-15R	6-15R	5-20R	6-20R
<b>Rating</b>		<b>15A-125V</b>	<b>15A-250V</b>	<b>20A-125V</b>	<b>20A-250V</b>
Duplex, Tamper Resistant	White	TBR15-W	—	TBR20-W	—
	Ivory	TBR15-I	—	TBR20-I	—
	Light Almond	TBR15-T	—	TBR20-T	—
	Grey	TBR15-GY	—	TBR20-GY	—
	Black	TBR15-E	—	TBR20-E	—
	Brown	TBR15	—	TBR20	—
Duplex	White	BR15-W	—	BR20-W	—
	Ivory	BR15-I	—	BR20-I	5824-I
	Light Almond	BR15-T	—	BR20-T	—
	Grey	BR15-GY	—	BR20-GY	—
	Black	BR15-E	—	BR20-E	—
	Brown	BR15	—	BR20	5824
Duplex, Weather Resistant	White	WBR15-W	—	WBR20-W	—
	Yellow	—	—	WBR20-Y	—
Single	White	—	—	5891-W	—
	Ivory	5088-I	5089-I	—	5823-I
	Brown	5088	—	5891	5823

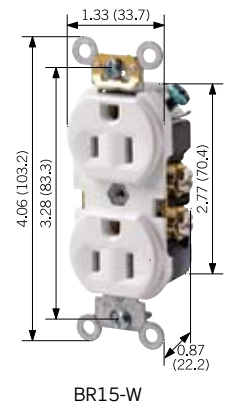


#### Dual Voltage, Back and Side Wired, Self-Grounding

Description	Color	Cat. No.
<b>NEMA</b>		
		5-20R 6-20R
<b>Rating</b>		<b>20A-125V/20A-250V</b>
Duplex	Ivory	5844-I
	Brown	5844


## Commercial Grade

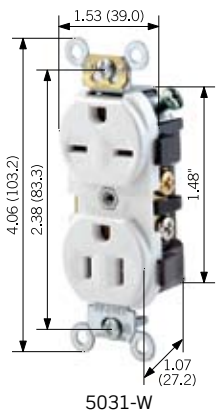

5031-W

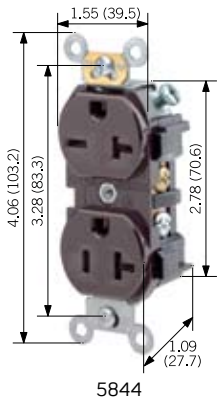

5844

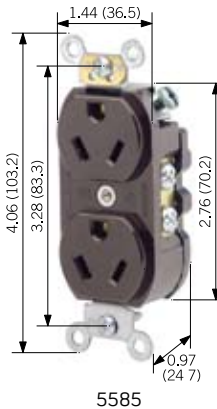

5585

### Dual Voltage, Side Wired, Self-Grounding

Description	Color	Cat. No.	Cat. No.
<b>NEMA</b>			
		5-15R 6-15R	5-20R 6-20R
<b>Rating</b>		<b>15A-125V/15A-250V</b>	<b>20A-125V/20A-250V</b>
Duplex	White	5031-W	—
	Ivory	5031-I	5842-I
	Brown	5031	5842

### Back and Side Wired, AC Grounding

Description	Color	Cat. No.
<b>NEMA</b>		
		7-15R
<b>Rating</b>		<b>15A-277V AC</b>
Duplex	Brown	5585

#### TESTING AND CODE COMPLIANCE

Meets all NEMA WD 6, UL 498 and ANSI C-73 requirements

- UL Listed (File #E-13399)
- CSA Certified (File #152105)
- NOM Certified (#057)

#### MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2  
Operating Temperature: -40°C to 60°C

#### MECHANICAL

Terminal I.D.: Brass-Hot, White-Neutral, Green-Grounding  
Terminal Accom.: #14-#10 AWG  
Product I.D.: Ratings are permanently stamped on device

#### ELECTRICAL

Dielectric Voltage: Withstands 2000V for UL 498  
Current Interr.: Full rated current  
Temp. Rise: Max 30°C at full rated current after 100 cycles overload at 150% of rated current for both AC and DC as per UL 498

#### HORSEPOWER

15A - 125V — 1/2  
15A - 250V — 1 1/2  
20A - 125V — 1  
20A - 250V — 2