Distinction™ EFR Series

Recessed designer series



Features

- · Contemporary, enduring designs
- 4W, 5W and 6W lamps
- · LED light source
- Will blend in with regular decorative recessed fixtures
- Choice of housing for new construction or insulated ceiling
- EFR8R is made of powder coated or electro-plate steel
- EFR9 is made of die-cast aluminum
- · Warranty details at: www.emergi-lite.ca

_





| EG-GRHR03 | Non-insulated ceiling 6-24V | New construction |
|-----------|---|------------------|
| EG-GRHR04 | Non-insulated ceiling 6-24V | Renovation |
| EG-GRHR05 | Non-insulated ceiling 120V GU10 | New construction |
| FG-GRHR06 | Insulated ceiling 120V input output GIJ | New construction |

Typical specifications

The contractor will supply and install **Emergi-Lite® Distinction™ Collection** recessed heads and housing. Recessed heads will be constructed of durable powder coated metal and use LED lamps. The light source will be ______ V, _____ LED or otherwise specified.

The remote unit shall be **Emergi-Lite®** model: ______. and the housing shall be **Emergi-Lite®** model: ______.

Replacement lamps


| Ordering code | Lamptyna | Voltage/wattage |
|---------------|-----------|------------------|
| Ordering code | Lamp type | voitage/ wattage |
| 580.0097-E | MR16 LED | 6V-4W |
| 580.0122-E | MR16 LED | 6V-5W |
| 580.0093-E | MR16 LED | 12V-4W |
| 580.0098-E | MR16 LED | 24V-4W |
| 580.0100-E | MR16 LED | 24V-6W |
| 580.0104-E | MR16 LED | 12V-5W |
| 580.0106-E | MR16 LED | 12V-6W |
| 580.0095-E | MR16 LED | 120V-4W |

LED compatibility chart

| Head style | 6V-4W | 12V-4W | 24V-4W | 12V-5W | 12V-6W | 120V-4W |
|------------|-------|--------|--------|--------|--------|---------|
| EFR8R | Х | Х | Х | Х | Х | Х |
| EFR9 | Х | Х | Х | Х | Х | Х |

Dimensions

Dimensions are approximate and subject to change.

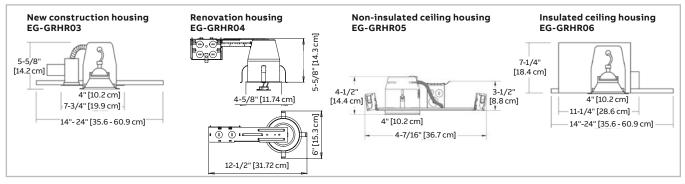

Ordering information

| Series | Head style | Colour | Voltage/wattage | Options |
|---------------------------------|---|--|--|--|
| EFR= decorative recessed remote | 8R= concave (tilting round rear load) 9= concave (egress/regress | BK= black BN= brushed nickel 8R series only WH= white | -LAC= MR16 LED, 6V-4W -LBC= MR16 LED, 6V-5W -LGC= MR16 LED, 12V-4W -LIC= MR16 LED, 12V-5W -LJC= MR16 LED, 12V-6W -LLC= MR16 LED, 24V-4W -LMC= MR16 LED, 24V-6W -LVC= MR16 LED, 120V-4W¹ ¹Available only with EL-GRHR05 housing | PM= complete with pendant mount backbox¹ ¹Pendant kit sold separately |