



# T&B Conduit Fittings

## Liquatite® Flexible Conduit — Steel

### Type SL

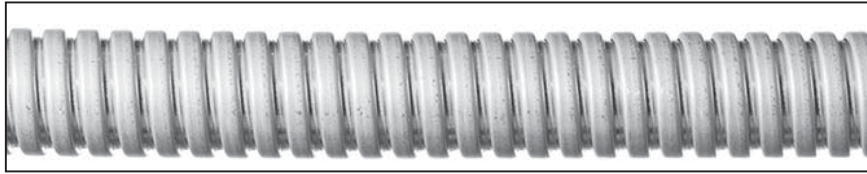

Trade Size (in.)	(mm)	Content Cat. No.	Coil Min. (m)	Inside Diameter				Outside Diameter		Bend Radius		Min. Inside Wt.		kg/30m
				in.	(mm)	Max. in.	(mm)	Min.	(mm)	Max.	(mm)	in.	(mm)	
-	-	<b>SL316-75</b>	75	0.172	(4.35)	0.202	(5.13)	0.280	(7.11)	0.310	(7.87)	0.75	(19.5)	2
-	-	<b>SL140-75</b>	75	0.235	(5.97)	0.265	(6.73)	0.328	(8.33)	0.358	(9.09)	0.75	(19.5)	3
5/16	-	<b>SL516-75</b>	75	0.297	(7.54)	0.327	(8.31)	0.391	(9.93)	0.421	(10.69)	0.75	(19.5)	3
-	-	<b>SL380-75</b>	75	0.360	(9.14)	0.390	(9.91)	0.485	(12.32)	0.515	(13.08)	1.00	(25.4)	4
-	-	<b>SL716-75</b>	75	0.422	(10.72)	0.452	(11.48)	0.547	(13.89)	0.577	(14.66)	1.00	(25.4)	4
3/8	16	<b>SL038-75</b>	75	0.492	(12.50)	0.512	(13.00)	0.617	(15.67)	0.637	(16.18)	1.00	(25.4)	5
-	-	<b>SL916-45</b>	45	0.547	(13.89)	0.577	(14.66)	0.672	(17.07)	0.702	(17.83)	1.25	(31.8)	5
1/2	-	<b>SL050-45</b>	45	0.622	(15.80)	0.642	(16.31)	0.747	(18.97)	0.767	(19.48)	1.50	(38.1)	7
-	20	<b>SL050M-45</b>	45	0.650	(16.51)	0.670	(17.01)	0.775	(19.69)	0.795	(20.19)	1.50	(38.1)	7
-	-	<b>SL340-45</b>	45	0.735	(18.67)	0.765	(19.43)	0.865	(21.97)	0.895	(22.73)	1.50	(38.1)	8
3/4	25	<b>SL075-30</b>	30	0.827	(21.00)	0.847	(21.51)	0.957	(24.31)	0.977	(24.82)	2.00	(50.8)	8
1	-	<b>SL100-15</b>	15	1.041	(26.44)	1.066	(27.07)	1.181	(30.00)	1.206	(30.63)	2.00	(50.8)	9
-	32	<b>SL100M-15</b>	15	1.102	(27.99)	1.122	(28.50)	1.242	(31.55)	1.262	(32.05)	2.00	(50.8)	-

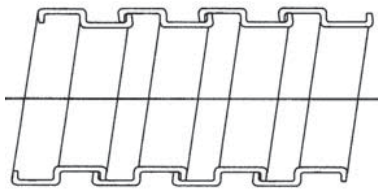

Squarelock

#### Type SL

This “extra-flexible” product, available in the smaller diameters, is designed for tightspot installation and where continuous flexing is required of a steel wound hose.

#### Construction


Type SL is helically wound from a formed strip of Electro-Galvanized steel. It is sized to be used with a variety of set-screw and clamp type fittings.

#### Applications

Offers good mechanical protection to wiring in a variety of O.E.M. applications.




### Type USL

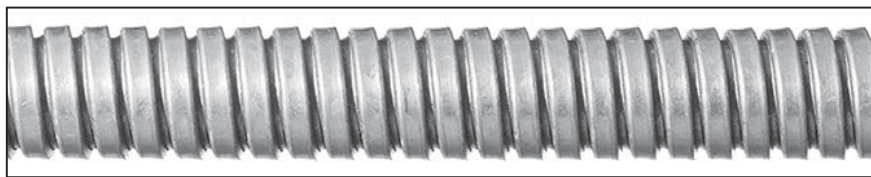

Cat. No.	Inner Dia.		Outer Dia.		Cat. No.	Coil Contents (m)	Min. Inside Bend Radius in. (mm)	Wt. kg/30m
	Min. in. (mm)	Max. in. (mm)	Min. in. (mm)	Max. in. (mm)				
<b>USL516</b>	0.297(7.54)	0.327(8.30)	0.457(11.60)	0.487(12.37)	<b>USL516-75</b>	75	1.25 (31.75)	5
<b>USL380</b>	0.360(9.14)	0.390(9.91)	0.520(13.20)	0.550(13.97)	<b>USL380-75</b>	75	1.25 (31.75)	6
<b>USL716</b>	0.422(10.7)	0.452(11.48)	0.582(14.78)	0.612(15.54)	<b>USL716-75</b>	75	1.50 (38.10)	7
<b>USL120</b>	0.485(12.3)	0.515(13.08)	0.645(15.86)	0.675(17.15)	<b>USL120-75</b>	75	1.50 (38.10)	8
<b>USL916</b>	0.557(14.1)	0.577(14.65)	0.707(17.96)	0.737(18.72)	<b>USL916-75</b>	75	1.50 (38.10)	9

Squarelock — Type USL



#### Type USL

This extra-flexible steel conduit is recognized UL and CSA for use within listed and certified assemblies.

#### Construction

Helically formed from hot-dipped galvanized steel, type USL offers good corrosion resistance and provides excellent mechanical protection to enclosed circuits.

#### Applications

This product is intended as a factory installed component of various assemblies. Typical uses include modular office partitions, showcase lighting, range tops and other appliances.



#### Listing / Certification

UL Recognized.