

## Eaton Bussmann series low voltage cylindrical fuse

**C22G50**

**UPC:**051712754484

### Dimensions:

- **Height:** 58 MM
- **Length:** 58 MM
- **Width:** 22.2 MM


**Weight:**58 G

### Warranties:

- 1 year limited

### Specifications:

- **Type:** fuse
- **Application:** for industrial applications | for general purpose use
- **Voltage Rating:** 690V
- **Voltage Rating Numeric:** 690 V
- **Amperage Rating:** 50A
- **Amperage Rating Numeric:** 50 A
- **Class:** Class C gL/gG
- **Connection:** Ferrule end X ferrule end
- **Construction Size:** 22 x 58 mm
- **Material Type:** Ceramic body, Silver-plated copper endcap
- **Packaging Type:** Standard
- **Quantity:** 10 per package
- **Fuse Indicator:** CH22 fuse holder
- **Fuse Type:** Cylindrical
- **Breaking Capacity:** 80 KA
- **Frequency Rating Maximum:** 45 HZ
- **Frequency Rating Minimum:** 62 HZ
- **Fuse Shape:** cylindrical
- **Release Characteristic:** Other
- **Utilization Category:** gL/gG (cable protection/equipment protection)

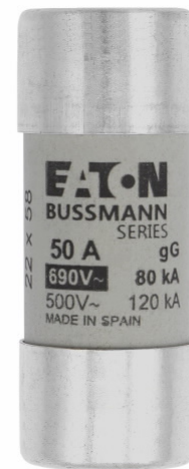

- **Voltage Type:** AC
- **With Striker:** No

**Supporting documents:**

- [Product Catalog](#)

**Certifications:**

- IEC 60269
- VDE

**Product compliance:**

- Contact factory
- CE Marked
- GoST-R
- RoHS Compliant