

## Eaton definite purpose contactor

C25DNF240T

UPC:782116300426

### Dimensions:

- **Height:** 3.75 IN
- **Length:** 3.35 IN
- **Width:** 2.4 IN

**Weight:**1.19 LB

### Warranties:


- 1 year

### Specifications:

- **Connection:** Quick
- **Amperage Rating:** 40A
- **Auxiliary Contact:** Quick connect (side-by-side)
- **Coil:** 120 Vdc
- **Coil Voltage:** 50/60 Hz
- **Enclosure:** Open with metal mounting plate
- **Frame Size:** 15-50A, two- and three-pole
- **Inductive Full Load:** 50A
- **Model:** Contactor
- **Number Of Poles:** Two-pole
- **Options:** Global listed
- **Series:** D1
- **Terminals:** Box lugs (posidrive setscrew)
- **Type:** Non-reversing

### Supporting documents:

- [Eatons Volume 5-Motor Control and Protection](#)
- [C25DNF2 3D Model Xchange](#)
- [C25DNF2 2D PDF](#)
- [C25DNF2 AutoCAD 2D Footprint](#)
- [C25DNF2 AutoCAD 2D Footprint \(mm\)](#)
- [C25DNF2 2D Drawing Xchange](#)
- [C25DNF2 3D Inventor](#)

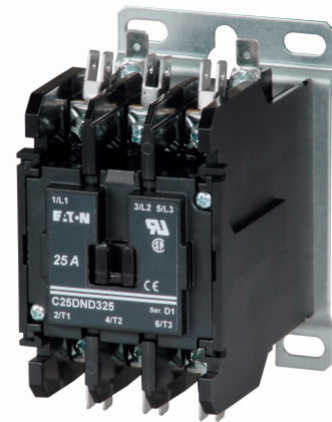

- [Eaton Specification Sheet - C25DNF240T](#)

**Certifications:**

- CSA Certified
- UL Recognized
- UL Listed file E1491 (Guide Number NLDX2)

**Product compliance:**

- RoHS Compliant

---

© 2016 Eaton. All rights reserved.