

Left-Hand Cobalt HSS Fractional Mechanics Length Drill Bits with 135° Split Point (Series 305)



30524

- 8% Cobalt alloyed for higher heat and abrasion resistance.
- Shorter drill for additional strength.
- Drill into fasteners without tightening them.
- Can often remove broken fasteners without an extractor.

Sets:

5-piece Set: 30520

Size	Decimal Equiv.	Flute Length	Overall Length	Carded Item #	Bulk Item #
5/64"	.0781	1"	2"	—	30505ZR
7/64"	.1094	1"	2-3/16"	—	30507
1/8"	.1250	1-1/16"	2-1/4"	—	30508
5/32"	.1563	1-1/4"	2-9/16"	—	30510
3/16"	.1875	1-1/2"	2-7/8"	—	30512ZR
7/32"	.2188	1-5/8"	3-1/8"	—	30514
1/4"	.2500	1-3/4"	3-5/16"	—	30516
9/32"	.2812	2"	3-9/16"	—	30518ZR
19/64"	.2969	2-1/16"	3-5/8"	—	30519
5/16"	.3125	2-1/8"	3-3/4"	—	31520
11/32"	.3438	2-1/4"	3-15/16"	—	30522
3/8"	.3750	2-3/8"	4-1/8"	—	30524
13/32"	.4062	2-1/2"	4-3/8"	—	30526ZR
7/16"	.4375	2-5/8"	4-9/16"	—	30528
15/32"	.4688	2-3/4"	4-3/4"	—	30530
1/2"	.5000	2-7/8"	5"	—	30532

HSS Fractional Screw Machine Length Drill Bits (Series 301)



30132

- 135° split-point tip starts drilling immediately and eliminates "walking."
- Engineered with premium high speed steel with black oxide coating for corrosion resistance.
- Shorter length for increased strength and rigidity (commonly known as "stubbies").
- Straight shank


Applications:

Industrial applications, maintenance and repair, automotive, machine shop

Size	Decimal Equiv.	Flute Length	Overall Length	Carded Item #	Bulk Item #
1/16"	.0625	5/8"	1-5/8"	—	30104
5/64"	.0781	11/16"	1-11/16"	—	30105
3/32"	.0938	3/4"	1-3/4"	—	30106
7/64"	.1094	13/16"	1-13/16"	—	30107
1/8"	.1250	7/8"	1-7/8"	—	30108
9/64"	.1406	15/16"	1-15/16"	—	30109
5/32"	.1562	1"	2-1/16"	—	30110
11/64"	.1719	1-1/16"	2-1/8"	—	30111
3/16"	.1875	1-1/8"	2-3/16"	—	30112ZR
13/64"	.2031	1-3/16"	2-1/4"	—	30113
7/32"	.2188	1-1/4"	2-3/8"	—	30114
15/64"	.2344	1-5/16"	2-7/16"	—	30115
1/4"	.2500	1-3/8"	2-1/2"	—	30116
17/64"	.2656	1-7/16"	2-5/8"	—	30117
9/32"	.2813	1-1/2"	2-11/16"	—	30118
19/64"	.2969	1-9/16"	2-3/4"	—	30119
5/16"	.3125	1-5/8"	2-13/16"	—	30120
21/64"	.3281	1-11/16"	2-15/16"	—	30121
11/32"	.3438	1-11/16"	3"	—	30122ZR
23/64"	.3594	1-3/4"	3-1/16"	—	30123
3/8"	.3750	1-13/16"	3-1/8"	—	30124
25/64"	.3906	1-7/8"	3-1/4"	—	30125
13/32"	.4063	1-15/16"	3-5/16"	—	30126
27/64"	.4219	2"	3-3/8"	—	30127ZR
7/16"	.4375	2-1/16"	3-7/16"	—	30128ZR
29/64"	.4531	2-1/8"	3-9/16"	—	30129ZR
15/32"	.4689	2-1/8"	3-5/8"	—	30130
31/64"	.4844	2-3/16"	3-11/16"	—	30131
1/2"	.5000	2-1/4"	3-3/4"	—	30132ZR

UNIBIT Step Drill Bits – Drill Multiple Hole Sizes with One Bit

IRWIN® UNIBIT® step drill bits are ideal for drilling holes in just about any type of thin material. General purpose high speed steel UNIBIT step drill bits are perfect for use in mild steel, copper, brass, aluminum, plexiglass, wood, and laminate. Our Titanium Nitride-coated (TiN) bits resist heat and friction, which extends the life of the cutting edge six times longer than standard step drills. And, our Cobalt step drill bits are engineered with M35 Cobalt steel for maximum life when drilling in the toughest steel, including stainless steel. Most UNIBIT step drills are designed with a SpeedPoint® tip that guarantees fast starts. They're manufactured with a single-flute cutting edge that drills multiple sizes of true, round holes with precise step control. Plus, the hole sizes are permanently laser-etched on the inside of the flute, so they can be easily identified throughout the life of the bit.

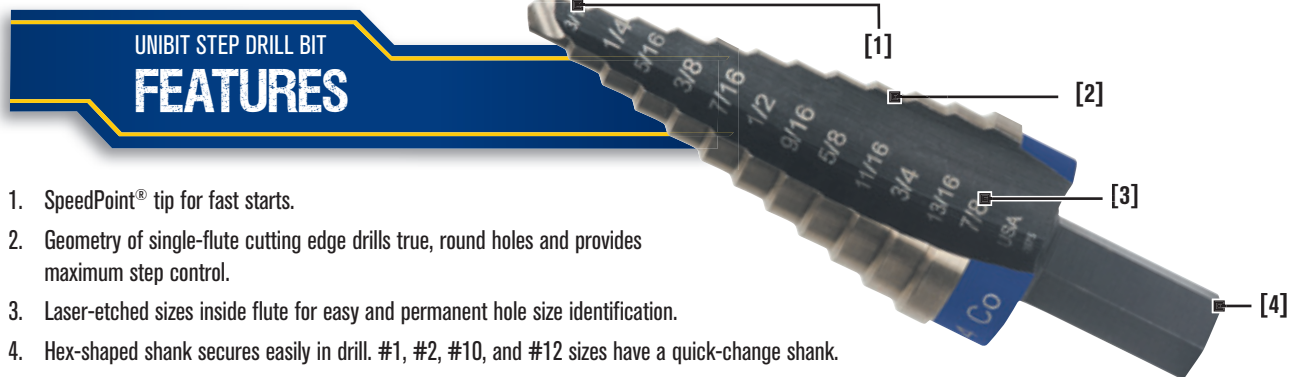

UNIBIT STEP DRILL BIT FEATURES

1. SpeedPoint® tip for fast starts.
2. Geometry of single-flute cutting edge drills true, round holes and provides maximum step control.
3. Laser-etched sizes inside flute for easy and permanent hole size identification.
4. Hex-shaped shank secures easily in drill. #1, #2, #10, and #12 sizes have a quick-change shank.

UNIBIT Application Guide

Cobalt	Titanium Nitride (TiN)	High Speed Steel (HSS)
Stainless Steel or Other Tough Materials	Repetitive Drilling	General Use

UNIBIT Cobalt HSS



10231CB

- Engineered with M35 Cobalt steel for maximum life when drilling in tough steel.
- SpeedPoint® tip for fast starts.*

Description	# of Hole Sizes	Hex Shank Size	Carded Item #
#1 1/8"-1/2" (1/32" steps)	13	1/4"	10231CB
#2 3/16"-1/2" (1/16" steps)	6	1/4"	10232CB
#3 1/4"-3/4" (1/16" steps)	9	3/8"	10233CB
#4 3/16"-7/8" (1/16" steps)	12	3/8"	10234CB
#9 7/8" and 1-1/8" for (1/2" and 3/4") KO	2	7/16"	10239CB
#20 9/16"-1" (1/16") Inc - Hole Enlarging	8	7/16"	10220CB
#1M 4 mm-12 mm (1 mm steps)	9	1/4"	11101CB
#2M 4 mm - 12 mm (2 mm steps)	5	1/4"	11102CB
#3M 6 mm - 18 mm (2 mm steps)	7	3/8"	11103CB
#4M 4 mm - 22 mm (2 mm steps)	10	3/8"	11104CB

UNIBIT HSS Fractional Titanium Nitride (TiN) Coated



15101ZR

- Titanium Nitride coating resists heat and friction, extending the cutting edge life up to six times longer than other high speed steel step drill bits.
- SpeedPoint® tip for fast starts.*

Set: 15502

Description	# of Hole Sizes	Hex Shank Size	Carded Item #
#1T 1/8" - 1/2" (1/32" steps)	13	1/4"	15101ZR
#2T 3/16" - 1/2" (1/16" steps)	6	1/4"	15102ZR
#3T 1/4" - 3/4" (1/16" steps)	9	3/8"	15103ZR
#4T 3/16" - 7/8" (1/16" steps)	12	3/8"	15104
#13T 1-1/8" (single hole)	1	7/16"	15313
#20T 9/16" - 1" (hole enlarging)	8	7/16"	15200
#21T 13/16" - 1-3/8" (hole enlarging)	10	7/16"	15221

▲ – SpeedPoint™ Tip

*included on all self-starting sizes except for #1