

# LU™710



## WAXY FILM PROTECTANT

Sprayon® LU™710 Waxy Film Protectant is a high-solids, waxy film, corrosion preventative compound suitable for a wide range of applications. Its formula provides long term protection of all metal surfaces, including vehicle underbody & enclosed, boxed, seam, joint & other crevice locations susceptible to corrosion.

**Uses:** Chemical plant valves, industrial machinery/equipment, steel mills, offshore oil rigs, overseas shipments, cable cars, conveyor belts, lugnuts and more.

- Meets Post Office Spec VB-65-1
- Passes Salt Spray ASTM B-117 1,000 Hours
- Passes Humidity Testing ASTM D-1748 @ 120dg F

Sizes:  
**S00710000** - 12 oz Aerosol  
**C00710000** - 340 g Aerosol



1. Lube - Medium Pressure
2. Heavy Indoor & Outdoor Protectant Up To 24 Months
3. Temp Range 0 °To 300 °F (-18 °To 149 °C)
4. Spray Any Way Valve
5. HFR Rating - 2,4,0

# LU™777

## OUTDOOR METAL PROTECTANT


Sprayon® LU™777 Outdoor Metal Protectant is a waxy corrosion preventative that offers excellent lubrication and long-term outdoor protection. Its tacky film provides an excellent barrier to salt spray and high humidity.

**Uses:** Bodies/frames of vehicles and machines, storage tanks and containers, castings, industrial parts and machines, molds, cables, generators, marine engines/parts, electrical equipment, sheet steel, oil field equipment, threads, locks, dies, gears, and more.

- Penetrates/Displaces Moisture/Prevents Rust
- Protects From Salt Water
- 24 Month Durability
- Meets MIL-C-16173D- Grade 2

Sizes:  
**S00777000** - 11 oz Aerosol  
**C00777000** - 311 g Aerosol

**S000777LQ** - 14 oz Liqui-Sol  
**C000777LQ** - 14 mL Liqui-Sol  
**S77701000** - 1 Gallon  
**S77705000** - 5 Gallon

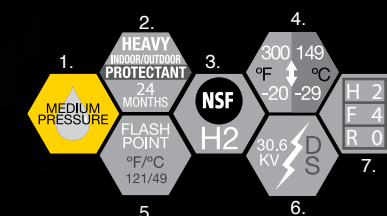

1. Lube - Medium Pressure
2. Heavy Indoor & Outdoor Protectant Up To 24 Months
3. NSF Registered H2
4. Temp Range -20°To 300°F (-29°To 149°C)
5. Flash Point 121°F (49°C)
6. Dielectric Strength 30.6 kV
7. HFR Rating: Aerosol - 2,4,0 Bulk - 2,2,0

# LU™737

## SYNTHETIC DRY PROTECTANT


Sprayon® LU™737 Synthetic Dry Protectant is a transparent, non-staining dry film that cleans, penetrates lubricates and displaces moisture. Formulated with synthetic additives to assure maximum penetration and protection against rust and corrosion. Its dry film resists dust, dirt and oil. This product is non-staining, waterproof, chemical resistant, and is non-conductive.

**Uses:** Excellent for bearings and sliding surfaces; displaces moisture in electrical applications.

- Penetrating, Greaseless Lube
- Resists Dust and Dirt Buildup
- Non-Flammable Propellant
- No Chlorinated Solvents

Sizes:  
**S00737000** - 11 oz Aerosol  
**C00737000** - 311 g Aerosol

**S73701000** - 1 Gallon  
**S73705000** - 5 Gallon

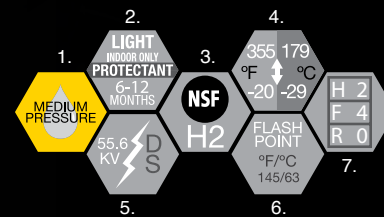

1. Lube - Medium Pressure
2. Light, Indoor Only Protectant For 6-12 Months
3. NSF Registered H2
4. Temp Range -20 °To 355 °F (-29 °To 179 °C)
5. Dielectric Strength 55.6kV
6. Flash Point 145 F
7. HFR Rating: Aerosol - 2,4,0 Bulk - 2,2,0

# LU™787


## ECO-GRADE™ MULTI-METAL PROTECTANT

Sprayon® LU™787 Eco-Grade™ Multi-Metal Protectant is a light amber colored, heavy-duty, biodegradable, dry film corrosion preventative that penetrates into cracks and crevices of metal surfaces. Formulated with vegetable oils which makes it an environmentally friendly alternative to mineral oil based products. Can be washed off with standard soap & water, but does not come off in the rain.

**Uses:** Mild steel, aluminum, stainless steel, galvanized steel, and chrome parts.

- No harsh solvents needed to remove – Soap & Water Clean-up
- 24 month protection outdoors
- Formulated with 100% Vegetable Oils
- Rapidly Biodegradable – BO OECD 301B

Sizes:  
**S00787000** - 12 oz Aerosol



1. HFR Rating - 1, 4, 0
2. Temp Range -20° To 350°F (-29° To 177°C)
3. Meets Organization for Economic Co-operation and Development (OECD) 301B Standards
4. Free from Heavy Metals
5. GreenCert™ Certified
6. Heavy Indoor & Outdoor Protectant Up To 24 Months

Refer to page 14 to learn more about the Sprayon® Eco-Grade™ Program

# LU™767

## INDOOR METAL PROTECTANT



Sprayon® LU™767 Indoor Metal Protectant is a medium weight oil formulated for excellent lubrication. This product has ideal corrosion protection, moisture displacement, and penetration properties. The protective film is non-staining and works up to 15 months against humidity and corrosion damage and is non-conductive.

**Uses:** Protects equipment stored indoors and items waiting to be shipped. Metals, rubber, plastic, and painted surfaces.

- Works On All Surfaces
- VOC Compliant
- Removes Spots On Synthetic Carpets
- Streak Proof Formula

Sizes:  
**S00767000** - 10 oz Aerosol  
**C00767000** - 283 g Aerosol

**S76701000** - 1 Gallon  
**S76705000** - 5 Gallon

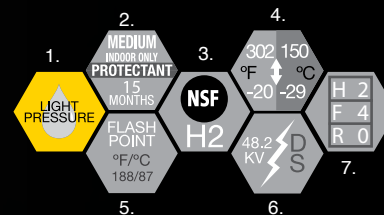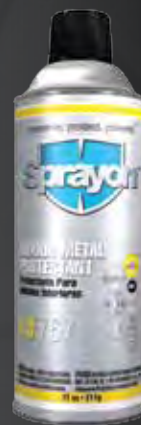

1. Lube - Light Pressure
2. Medium, Indoor Only Protectant Up To 15 Months
3. NSF Registered H2
4. Temp Range -20°To 302°F (-29°To 150°C)
5. Flash Point 188°F (87°C)
6. Dielectric Strength 48.2kV
7. HFR Rating: Aerosol - 2,4,0 Bulk - 2,2,0

# LU™914


## LECITHIN LUBRICANT

Sprayon® LU™914 Lecithin Lubricant is a solvent based, extracted soybean oil with exceptional purity. This organically derived lube provides a quick, clean release for thermosets/thermoplastics. Low buildup & low migration. Will not interfere with post finishing including heat sealing laminating, bonding, metallizing, plating & hot stamping. Does not contain Methylene Chloride.

**Uses:** Compression molding, metal die molding, cutting equipment, gaskets & seals for tank closures.

- Formulated Without Methylene Chloride
- Meets FDA 121.01 Regulation
- Quick, Clean Releases
- Works Up to 350°F

Sizes:  
**S00914000** - 11 oz Aerosol  
**C00914000** - 311 g Aerosol



1. Lube - Light Pressure
2. Temp Range -20°To 350°F (-29°To 177°C)
3. HFR Rating - 2,3,0