

Thin-wall heat-shrinkable tubing

CPO Series



2:1 Shrink ratio

Thin-wall tubing, non-lined

- Flame-retardant, cross-linked polyolefin
- Continuous operating temperature: -55 °C to 135 °C
- Shrink temperature of 120 °C

- Meets UL and CSA standards; MIL-DTL-23053/5 Class 1 and 2; AMS 3636 and 3637; DEF STAN 59-97, Issue 3, Type 2a
- Shelf life 5 years from date of manufacture
- UV rated (ASTM G53)


Thin-wall heat-shrinkable tubing

Cat. no.*	Min. expanded I.D. (in.)	Max. recovered I.D. (in.)	Nom. recovered wall thickness (in.)	Code cable size (AWG) or kcmil
CPO63-_-_-	0.06	0.03	0.02	-
CPO93-_-_-	0.09	0.05	0.02	-
CPO125-_-_-	0.13	0.06	0.02	#24-#30
CPO187-_-_-	0.18	0.09	0.02	#14-#22
CPO250-_-_-	0.25	0.13	0.03	#10-#16
CPO375-_-_-	0.38	0.19	0.03	#6-#12
CPO500-_-_-	0.50	0.25	0.03	#1-#6
CPO750-_-_-	0.75	0.38	0.03	4/0-#2
CPO1000-_-_-	1.00	0.50	0.04	350-2/0
CPO1250-_-_-	1.25	0.625	0.04	1/0-350
CPO1500-_-_-	1.50	0.75	0.04	2/0-500
CPO2000-_-_-	2.00	1.00	0.045	250-1,000

*See catalogue construction to complete.
 UL Recognized and CSA Certified. (NOTE: Clear material not UL Recognized).
 When ordering standard package, order by package not feet.
 Larger diameters available upon special request; contact your regional sales office.
 Order multiple for 4' sticks is 25 sticks.
 Order multiple for reels is 1 reel.

Series	Bulk length (ft)	Series	Bulk reel length (ft)
CPO63 = 1/16 in.	1,000	CPO500 = 1/2 in.	500
CPO93 = 3/32 in.	1,000	CPO750 = 3/4 in.	200
CPO125 = 1/8 in.	1,000	CPO1000 = 1 in.	100
CPO187 = 3/16 in.	1,000	CPO1250 = 1 1/4 in.	100
CPO250 = 1/4 in.	500	CPO1500 = 1 1/2 in.	100
CPO375 = 3/8 in.	500	CPO2000 = 2 in.	100

Catalogue number construction

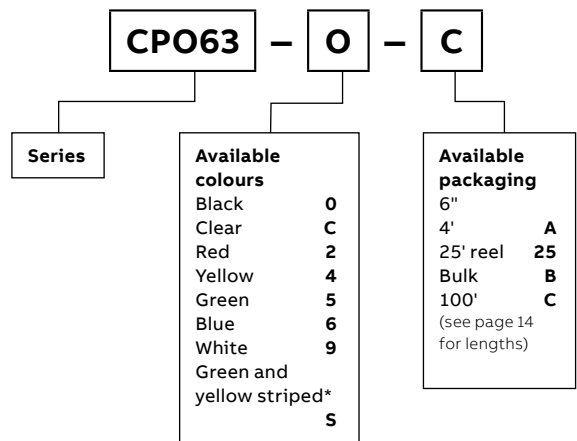

Final order no.
 CPO63-0-C

* Contact your regional sales office for bulk reel quantity

Cat. no.	Min. expanded I.D. (in.)	Max. recovered I.D. (in.)	Nom. recovered wall thickness (in.)	Std. pkg. qty.
CPO63-0-6	0.06	0.03	0.02	20
CPO93-0-6	0.09	0.05	0.02	20
CPO125-0-6	0.13	0.06	0.02	20
CPO187-0-6	0.19	0.09	0.02	20
CPO250-0-6	0.25	0.13	0.03	20
CPO375-0-6	0.38	0.19	0.03	20
CPO500-0-6	0.50	0.25	0.03	10
CPO750-0-6	0.75	0.38	0.03	10
CPO1000-0-6	1.00	0.50	0.04	5

Order multiple is std. pkg.
 Catalogue numbers listed are black colour;
 other colours available upon request.
 Contact your regional sales office.