




Wiha Insulated SlimLine Screwdriver Sets



32196 6 Piece Insulated SlimLine Slotted, Phillips & Square Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools. Wiha-SoftFinish® handle, multi-component, cushion grip.

Item	Slotted: 4.5, 6.5mm	lbs.
No.	Phillips: #1, #2	
32196	Square: #1, #2	1.15




1000Volt

32596 6 Pc. Insulated SlimLine Security TORX® Screwdrivers. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Security TORX®: T10s, T15s, T20s, T25s, T27s, T30s	lbs.
32596		1.18

Wiha Slim TECHNOLOGY

Achieves blade diameters up to 33% narrower utilizing Wiha integrated insulation



1000Volt



30770 2 Pc. Insulated SlimLine Terminal Block Xeno Slotted/Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Xeno: #1x80mm	lbs.
30770	Xeno: #2x100mm	.34



1000Volt

32189 2 Pc. Insulated SlimLine Slotted & Phillips Screwdrivers. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Individually Tested to 10,000Volts. High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

Item No.	Slotted: 4.5x125mm	lbs.
32189	Phillips: #2x100mm	.37



1000Volt



32079 30 Pc. Insulated SlimLine Slotted & Phillips Screwdriver Display. Meets ASTM, VDE, EN/IEC, NFPA70E & CSA Specs, Tested to 10,000Volts. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools. High quality CV steel, through hardened.

Item	6 of each:	lbs.
No.	Slotted: 3.5, 4.5, 5.5mm	
32079	Phillips: #1, #2	

Insulated PicoFinish Precision Screwdrivers



1000Volt

320 Insulated Slotted PicoFinish Screwdrivers. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested.


Item No.	mm	Inch	mm	mm	lbs.	pkg.
32000	1.5	.06	40	154	.05	1
32001	2.0	.08	40	154	.07	1
32002	2.5	.10	60	160	.07	1
32003	3.0	.12	60	160	.08	1
32004	3.5	.14	60	160	.08	1



1000Volt

321 Insulated Phillips PicoFinish Screwdrivers. Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested.

Item No.	Size	mm	mm	lbs.	pkg.
32106	00	40	154	.05	1
32107	0	60	160	.07	1
32108	1	60	160	.08	1




1000Volt



32088 8 Piece Slotted & Phillips PicoFinish Set High quality CV steel, through hardened, black finish

Item No.	Slotted: 1.5, 2.0, 2.5, 3.0, 3.5	lbs.
32088	Phillips: #00, #0, #1	.35

Individually Tested Protective Insulation 1000Volt AC, VDE & GS Tested



Rotating cap for precise turning and control with fingertip



32085 5 Piece Slotted & Phillips PicoFinish Set High quality CV steel, through hardened, black finish

Item No.	Slotted: 1.5, 2.5, 3.5	lbs.
32085	Phillips: #0, #1	.26

Wiha Insulated Screwdrivers with SoftFinish® Cushion Grip Handle

Insulation Test Standards:

Insulation according to EN/IEC 60900, ASTM F-1505, New VDE 0682/part 201, DIN 7437, NFPA70E & CSA

Responds to OSHA's use specification 29 CFR1910



Each tool individually tested to 10,000 Volts & certified to 1000 Volt ac or 1500 Volt dc

SoftFinish® handle Solid molded core with soft outer cushion grip. 40% more torque than conventional handles

Insulation
Molded directly onto the blade for permanent bonding

Blade
CVM tool steel, hardened to average 58/60RC

1000V



1000Volt



320 Slotted Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested.

Item No.	Slotted (mm)	Slotted (Inch)	Slotted (Inch)	Phillips (mm)	Phillips (Inch)	Phillips (mm)	Phillips (Inch)	lbs.	pkg.
32005	2.0	.078	5/64	60	3.0	164	6.5	.05	10
32010	2.5	.098	3/32	75	3.0	179	7.1	.06	10
32012	3.0	.118	1/8	100	4.0	204	8.0	.07	10
32015	3.5	.139	9/64	100	4.0	204	8.0	.07	10
32017	4.0	.157	5/32	100	4.0	211	8.3	.12	10
32023	4.5	.177	3/16	100	4.0	211	8.3	.12	10
32024	4.5	.177	3/16	125	5.0	236	9.3	.12	10
32027	4.5	.177	3/16	150	6.0	261	10.2	.14	10
32025	4.5	.177	3/16	175	7.0	286	11.2	.13	10
32028	4.5	.177	3/16	200	8.0	311	12.3	.15	10
32031	5.5	.216	7/32	125	5.0	243	9.5	.15	10
32026	5.5	.216	7/32	175	7.0	293	11.5	.21	10
32034	6.0	.236	15/64	150	6.0	268	10.6	.21	10
32039	6.5	.255	1/4	150	6.0	268	10.6	.21	10
32042	8.0	.315	5/16	175	7.0	299	11.8	.34	10
32045	10.0	.393	3/8	200	8.0	318	12.5	.39	10



1000Volt

32105 2 Piece Slotted & Phillips Set
 Item ↓ Slotted: 5.5
 No. ⚡ Phillips: #2
 32105 ⚡ lbs. .50



1000Volt

33532 2 Piece Slotted & Phillips Set
 Item ↓ Slotted: 6.0
 No. ⚡ Phillips: #2
 33532 ⚡ lbs. .50


1000Volt



321 Phillips Screwdriver, With Wiha-SoftFinish® Handle. Insulation According to ASTM F-1505, New VDE Specification 0682/part 201 and EN/IEC 60900, NFPA70E & CSA, up to 1000 Volt. Individually Tested.

Item No.	Size	mm	Inch	mm	Inch	lbs.	pkg.
32100	0	60	2.4	164	6.5	.06	10
32101	1	80	3.0	191	7.5	.12	10
32102	2	100	4.0	218	8.6	.20	10
32103	3	150	6.0	268	10.6	.34	10
32104	4	200	8.0	318	12.5	.39	10

1000Volt

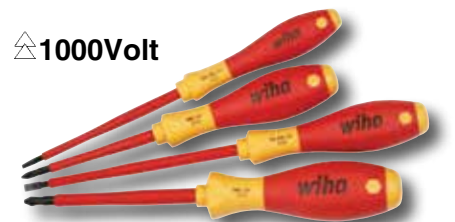

32090 4 Piece Slotted & Phillips Set

Item No. ↓ Slotted: 3.5, 4.5
 32090 ⚡ Phillips: #1, 2
 ⚡ lbs. .76