

Straight Blade Devices  
15A, 125V, 2 Pole, 3 Wire Grounding  
Heavy Duty, Single Receptacle

HUBBELL

Features

- Slender/compact design
- Triple wipe contacts

Ordering Information

Description	Device Color	UPC	Catalog Number
Flush, side wired only	Brown	783585013817	HBL5251

Listings


UL Listed, File E2186  
Certified to CSA 22.2, No. 42  
Fed. Spec. WC596  
NEMA® WD-6 Compliant

Specifications

Body	PBT
Insulator	RTP
Contacts	Brass
Terminal Screws	Brass
Mounting Strap	Galvanized steel
Automatic Self-grounding Clip	Stainless steel
Mounting Screws	Galvanized Steel

Performance

<b>Electrical</b>	
Current Interrupting	Certified for current interrupting at full rated current
Dielectric Voltage	Withstands 2,000V minimum
<b>Mechanical</b>	
Product Identification	Ratings are a permanent part of the device
Terminal Accommodation	#14-#10 AWG copper stranded or solid conductor only
Terminal Identification	Terminals identified in accordance with UL 498 and CSA
<b>Environmental</b>	
Flammability	UL 94 V-0
Operating Temperatures	Maximum continuous 75°C; minimum -40°C (w/o impact)

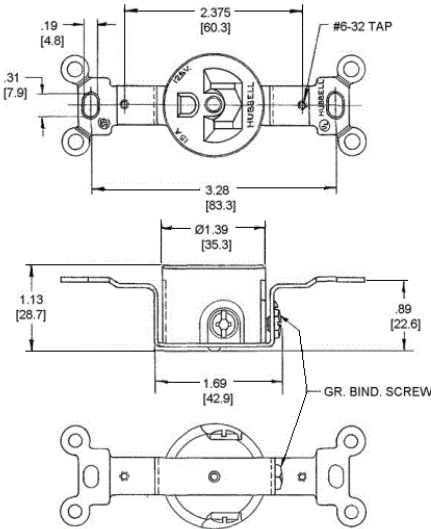

Accessories

Wallplate or Weatherproof Cover Duplex Opening

Resources

Customer Use Drawing  
eCatalog

