

Straight Blade Devices  
20A, 125V, 2 Pole, 3 Wire Grounding  
HBL® Extra Heavy Duty Specification  
Grade Single Receptacle

HUBBELL

Features

- One-piece brass integral ground strap
- Unique bypass contact design

Ordering Information

| Description         | Device Color | UPC          | Catalog Number |
|---------------------|--------------|--------------|----------------|
| Back and side wired | Brown        | 783585013909 | HBL5361        |

Listings


UL Listed to UL498 File No. E2186  
Certified to CSA 22.2, No. 42 File 285  
Fed. Spec. W-C-596  
NEMA® WD-6 Compliant

Specifications

|                          |                     |
|--------------------------|---------------------|
| Face                     | Nylon               |
| Base                     | PBT                 |
| Power Contacts           | .037 in. (.9) Brass |
| Ground Contact           | Brass               |
| Mounting Strap           | .050" (1.3) Brass   |
| Auto Self-grounding Clip | Stainless steel     |
| Mounting Screws          | Zinc plated steel   |

Performance

|                         |  |
|-------------------------|--|
| <b>Electrical</b>       |  |
| Current Interrupting    | Certified for current interrupting at full rated current |
| Dielectric Voltage      | Withstands 2,000V minimum                                |
| <b>Mechanical</b>       |  |
| Product Identification  | Ratings are a permanent part of the device               |
| Terminal Accommodation  | #12-#10 AWG copper stranded or solid conductor only      |
| Terminal Identification | Terminals identified in accordance with UL 498 and CSA   |
| <b>Environmental</b>    |  |
| Flammability            | Top: UL 94V-2, Base: UL 94V-0                            |
| Operating Temperatures  | Maximum continuous 75°C; minimum -40°C (w/o impact)      |

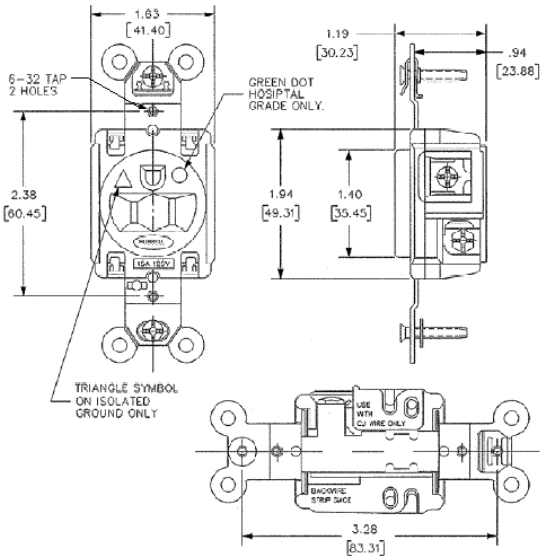

Accessories

Wallplate or Weatherproof Cover 1.40" Opening

Resources

Customer Use Drawing  
eCatalog

