

PASS & SEYMOUR® Half & Dual Controlled Plug Load Controllable Receptacles

5262CH, 5362CH, 5262CD, 5362CD

Durable receptacles designed for energy savings.

These durable, dependable receptacles feature a permanently marked, differentiated solution that meets all necessary code requirements. The controlled receptacle marking printed on the face of the receptacle is both NEMA-approved and compliant with the National Electrical Code®, CA Title 24, and ASHRAE Energy Efficiency Standard 90.1. This clear, permanent marking helps end-users differentiate controlled receptacles from others. Corrosion-resistant plated steel straps and high-strength nylon faces make these receptacles perfect for any hard use application. They feature one-piece, triple-wipe brass contacts for lasting retention. And screw-pressure-plate back wiring makes installation fast and easy.



FEATURES & BENEFITS

.032 inch thick, brass, triple-wipe power contacts for lasting retention.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Can be wired to any number of stand-alone or system-based plug load control solutions.

Also available: Half-controlled version, that features a factory-broken split-circuit tab, allowing for half of the receptacle to be controlled.



5362CDBK

Auto-ground clip assures positive ground.

Controlled receptacle marking is NEMA-approved and compliant with 2014 NEC®, CA Title 24, and ASHRAE Energy Efficiency Standard 90.1.

Corrosion-resistant, plated steel strap locked into face and back body to resist pulling away from face/body assembly.

Strap tabs wrap around face to prevent strap from separating from face and back body.

Tri-drive steel terminal screws. Internal screw-pressure-plate back and side wire capability. Two back wire holes for more wiring flexibility.

FIELD USES / VERTICAL MARKETS

■ Office

■ Education

■ Institutional




PASS & SEYMOUR®

Half & Dual Controlled Plug Load Controllable Receptacles

TECHNICAL INFORMATION

Catalog Number	Rating A	V	Color	NEMA Configuration No.
Half-Controlled Duplex Receptacles Back & Side Wire				
5262CHI	15A	125V	Ivory	5-15R
5262CHW	15A	125V	White	5-15R
5262CH	15A	125V	Brown	5-15R
5262CHGRY	15A	125V	Gray	5-15R
5262CHBK	15A	125V	Black	5-15R
5262CHRED	15A	125V	Red	5-15R
5262CHLA	15A	125V	Light Almond	5-15R
5262CHBL	15A	125V	Blue	5-15R
5362CHI	20A	125V	Ivory	5-20R
5362CHW	20A	125V	White	5-20R
5362CH	20A	125V	Brown	5-20R
5362CHGRY	20A	125V	Gray	5-20R
5362CHBK	20A	125V	Black	5-20R
5362CHRED	20A	125V	Red	5-20R
5362CHLA	20A	125V	Light Almond	5-20R
5362CHBL	20A	125V	Blue	5-20R
Dual-Controlled Duplex Receptacles Back & Side Wire				
5262CDI	15A	125V	Ivory	5-15R
5262CDW	15A	125V	White	5-15R
5262CD	15A	125V	Brown	5-15R
5262CDGRY	15A	125V	Gray	5-15R
5262CDBK	15A	125V	Black	5-15R
5262CDRED	15A	125V	Red	5-15R
5262CDLA	15A	125V	Light Almond	5-15R
5262CDBL	15A	125V	Blue	5-15R
5362CDI	20A	125V	Ivory	5-20R
5362CDW	20A	125V	White	5-20R
5362CD	20A	125V	Brown	5-20R
5362CDGRY	20A	125V	Gray	5-20R
5362CDBK	20A	125V	Black	5-20R
5362CDRED	20A	125V	Red	5-20R
5362CDLA	20A	125V	Light Almond	5-20R
5362CDBL	20A	125V	Blue	5-20R



For more information on these and other P&S products refer to our Catalog or visit our web site.

PASS & SEYMOUR®

Half & Dual Controlled Plug Load Controllable Receptacles



DIMENSIONS

3rd Party Compliance

UL Listed, File Number E140596, Standard UL498.
Fed Spec WC596.
CSA Certified File Number LR16063, Standard CSA-C22.2 No. 42 General Use Receptacles.
Conforms to NEMA WD-1 and WD-6.

Performance

Electrical


Dielectric Withstand Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current

Mechanical

Terminal Identification	Terminal Identification in accordance with UL 498 (Brass, White, Green)
Terminal Accommodation	#14 AWG - #10 AWG copper conductor only.
Product Identification	Ratings are permanent part of the device

Environmental

Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C (without impact)

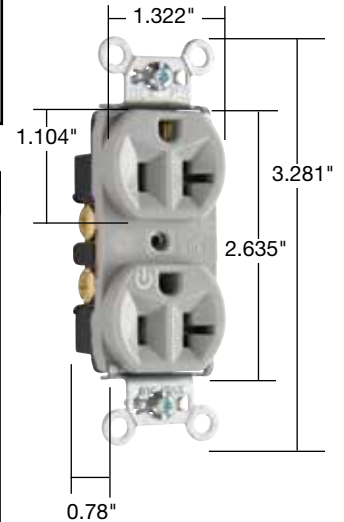

Materials

Face	Nylon
Back Body	PVC
Line Contacts	.032 688 Brass
Mounting Strap	.042" Zinc-Plated Steel
Ground Contacts	.040" 688 Brass
Pressure Plate	.080" Steel
Terminal Screws	#8 Tri-Drive Brass (Neutral = Nickel Plated Steel)
Ground Screw	#8 Hex Tri-Drive Brass
Assembly Drive Screw	Zinc-Plated Steel
Auto-Ground Clip	Stainless Steel
Mounting Screws	Tri-Drive Steel
Ink	Pad Printed

Warranty

1 Year

ALSO AVAILABLE...

- USB Charging Devices
- Hospital Grade Devices
- SPD & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips



Electrical Wiring Systems

P.O. Box 4822
Syracuse, NY 13221-4822
Phone: 1.800.776.4035
www.legrand.us/passandseymour

570 Applewood Crescent
Vaughan, Ontario L4K 4B4
Phone: 905.738.9195
www.legrand.ca