



LED InstantFit Lamps

10.5PL-C/T LED/26V-3500 IF 4P 1PK 10/1

Philips LED T8 InstantFit Lamps are an ideal energy saving choice for existing linear fluorescent fixtures.

Product data

General Information		Voltage (Nom)	
Cap-Base	G24Q/GX24Q [G24q/GX24q]	Voltage (Nom)	120 V
Main Application	Industrial	Temperature	
Nominal Lifetime (Nom)	50000 h	T-Ambient (Max)	45 °C
Switching Cycle	50000X	T-Ambient (Min)	-20 °C
B50L70	50000 h	T-Storage (Max)	65 °C
		T-Storage (Min)	-40 °C
		T-Case Maximum (Nom)	60 °C
Light Technical		Controls and Dimming	
Color Code	835 [CCT of 3500K]	Dimmable	No
Initial lumen (Nom)	1200 lm	Mechanical and Housing	
Luminous Flux (Rated) (Nom)	1200 lm	Product Length	100 mm
Correlated Color Temperature (Nom)	3500 K	Approval and Application	
Color Consistency	<6	Energy Saving Product	Yes
Color Rendering Index (Nom)	82	Approbation Marks	UL certificate RoHS compliance KEMA Keur certificate DLC compliance
LLMF At End Of Nominal Lifetime (Nom)	70 %	Product Data	
Operating and Electrical		Order product name	10.5PL-C/T LED/26V-3500 IF 4P 10/1
Input Frequency	20000-100000 Hz	EAN/UPC - Product	046677458423
Power (Rated) (Nom)	10.5 W	Order code	458422
Lamp Current (Max)	550 mA	Numerator - Quantity Per Pack	1
Lamp Current (Min)	150 mA		
Starting Time (Nom)	0.5 s		
Warm Up Time to 60% Light (Nom)	0.5 s		
Power Factor (Nom)	0.9		

LED InstantFit Lamps


Numerator - Packs per outer box	10
Material Nr. (12NC)	929001388604
Net Weight (Piece)	0.091 kg

Model Number	9290013886
--------------	------------

Warnings and Safety

- Perform a visual inspection to ensure lamp holders (or sockets) are not damaged or loose. If the lamp holders (or sockets) are damaged, corroded, charred, blackened or loose, contact a qualified electrician for proper replacement.
- Please refer to the ballast compatibility guide located at www.philips.com/instantfit.



Dimensional drawing

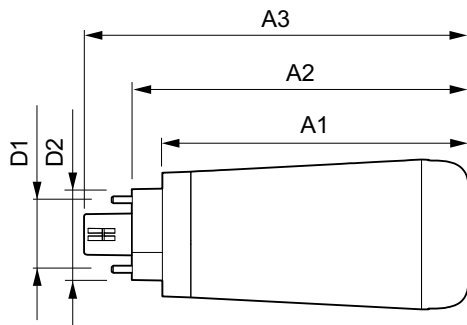

PLED PLC 10.5-26W 1200lm 3500K GX24q


Product	D1	D2	A1	A2	A3
10.5PL-C/T LED/26V-3500 IF 4P	24.3 mm	29 mm	99.9 mm	109.9 mm	125.5 mm
10/1					

Photometric data

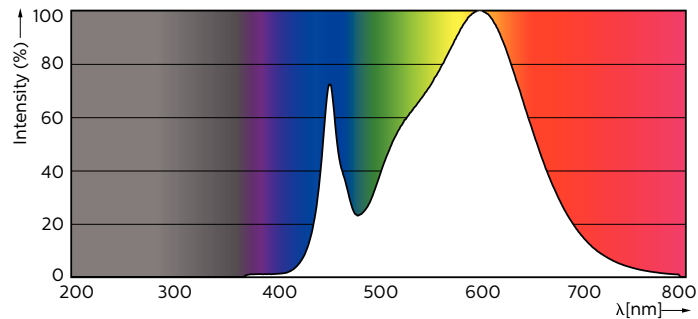

General Uniform Lighting



LEDtube PLC 100mm 11W G24Q GX24Q 835 1200lm

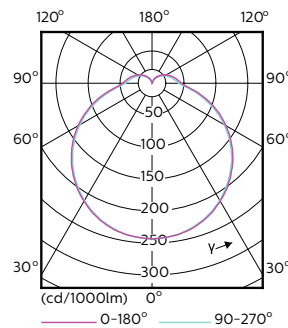

LEDtube PLC 100mm 11W G24Q GX24Q 827 1200lm



LED InstantFit Lamps

Lifetime

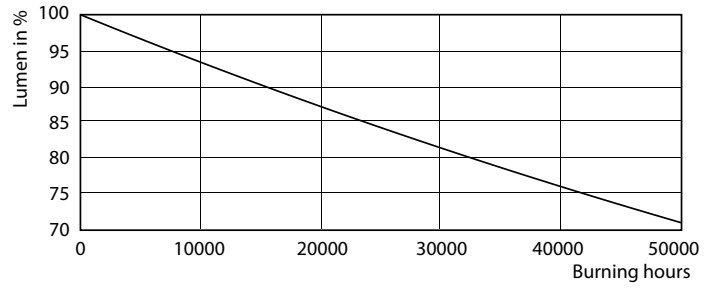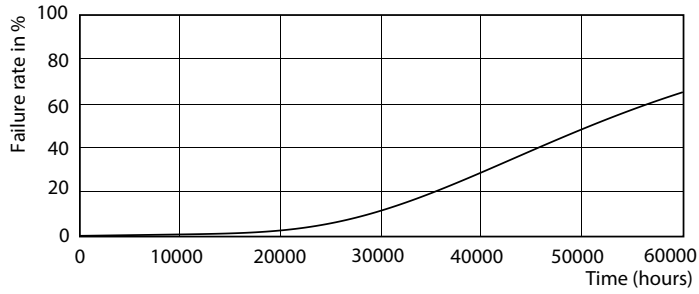


LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

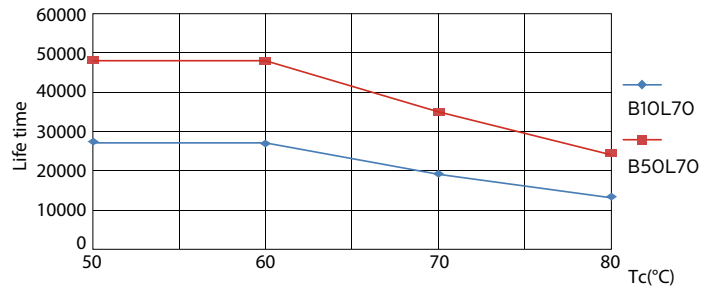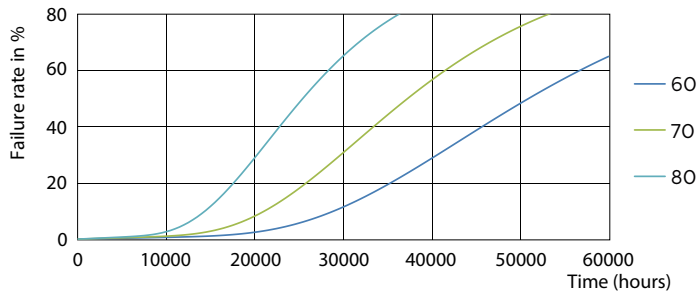

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

LEDtube PLC 100mm 9W G24Q GX24Q 827 850lm

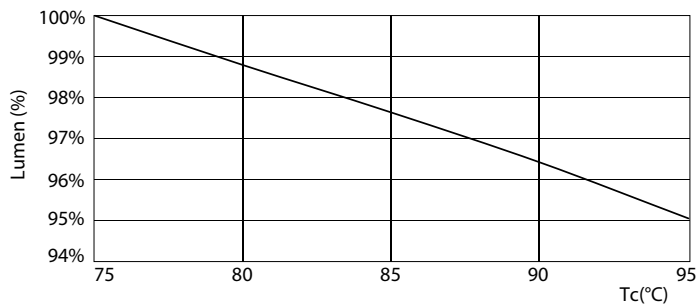

LEDtube PLC 100mm 11W G24Q GX24Q 827 1200lm

LED InstantFit Lamps

