

400 Series

Extruded Aluminum Exit Sign

Versatile, highly-efficient, energy-saving illumination.



Features

- Durable extruded, one-piece aluminum housing
- Information for complete details.
- Long-life, energy efficient **AllnGaP** technology red LED light source completely enclosed in acrylic module
- Single illumination module lights both single and double face exit signs
- Highly energy efficient – consumes less than 3.5watts in AC or DC mode
- Normal AC and emergency DC operation – 120, 277 or 347volts AC input; 6 to 24volts DC input
- Also available with power pack; see **3LER400** catalogue sheet
- Comes with the lumacell EZ2 canopy for quick & easy installation. See page 103 for information.
- CSA certified, meets or exceeds C860 requirements



Typical Specification

Supply and install the Lumacell LER400 Series LED exit signs. The equipment shall operate with universal AC input voltage of 120, 277 or 347Vac at less than 1.5watts and universal two-wire DC input voltage from 6Vdc to 24Vdc at less than 1.5watts for single and double face signs. The housing shall be constructed of rugged extruded aluminum and have a maximum depth of 2-1/2". The faceplate(s) shall be constructed of extruded aluminum and come standard with knockout chevrons. The light source shall be light emitting diodes (LED). The red LED technology shall be **AllnGaP**. The LED lamps shall provide illumination in normal and emergency operation and shall be mounted inside the exit housing, not on the face.

An LED-sensitive diffuser shall be mounted behind the legend to provide the 6" high by 3/4" stroke letters with even illumination.

The exit sign in a self-powered configuration shall be equipped with a nickel cadmium battery and shall stay illuminated during emergency operation for at least 90 minutes upon AC failure.

The exit sign shall be CSA-C860 approved.

The equipment shall be Lumacell Model:


_____.

Project/Location		Date
Contractor		Prepared by
LUMACELL Model		



Dimensions

LER400 SERIES

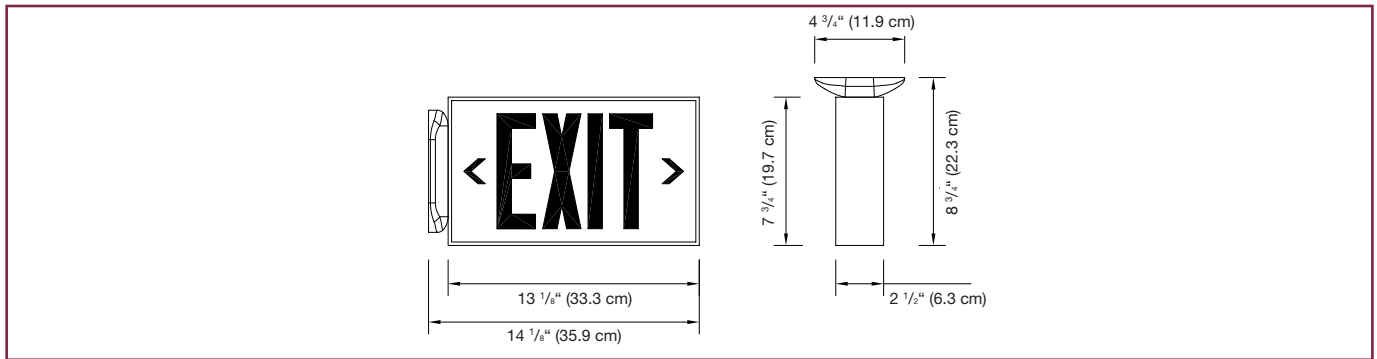

Wire Guards

460.0079-L	Wall Mount
460.0027-L	End Mount
460.0028-L	Ceiling Mount

Power Consumption

Model	AC Specs		DC Specs	
AC/standard DC, red	120/277/347Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
AC/special DC, red	120/277/347Vac	Less than 3W	36 or 48 or 120Vdc	Less than 2.5W
Self-powered, red	120 to 347Vac	Less than 3W	NiCad battery	Min. 90 minutes
AC/standard DC, green	120 to 347Vac	Less than 1.5W	6 to 24Vdc	Less than 1.5W
Self-powered, green	120 to 347Vac	Less than 3.5W	NiCad battery	Min. 90 minutes

Ordering Information

Series	Faces	Colour	Voltage	Options
LER= EXIT	450= single face	Blank= factory white PW= polar white BK= black SG= silver grey BA= brushed aluminium TA= textured aluminium	UNIV= 120/277/347Vac, 6 to 24Vdc UNIV36= 120/277/347Vac, 36Vdc, 4 wires UNIV48= 120/277/347Vac, 48Vdc, 4 wires UNIV120= 120/277/347Vac, 120Vdc, 4 wires SP= 120 to 347Vac, self-powered 120VACDC2= 120Vac, 120Vdc, 2 wires 240= 240Vac, 60HZ, 12Vdc	Blank= no options
	460= double face			**VRSTP= vandal resistant shield and tamper proof screws TP= tamper proof screws GN= green letters ***990.0119-L= tamper proof bit
				** Indicate single or double. *** One bit per order.

EXAMPLE: LER450UNIV