



# A smooth design solution for a seamless look

## PAR30/PAR20 LED

Philips PAR30 and PAR20 LED Single Optic Lamps provide superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

### Benefits

- Will not fade colors, avoids inventory spoilage
- Lowers maintenance costs by reducing re-lamp frequency
- 5-year limited warranty\*\*
- \*\* For details see: [http://www.usa.lighting.philips.com/connect/tools\\_literature/warranties.wpd](http://www.usa.lighting.philips.com/connect/tools_literature/warranties.wpd).

### Features

- 25,000-hour rated average life\*
- Virtually UV/IR free in the beam
- Contains no mercury

### Application

- Ideal for general and accent lighting in retail, hospitality and office spaces.

# PAR30/PAR20 LED

## Versions



PAR30L



PAR30S



PAR30S



E26 PAR30L



E26 PAR20



PAR30S E26





PAR30L E26



PAR30S

## Dimensional drawing







Product	D	C
12PAR30L/AMB/F25/840/DIM ULW	95 mm	115 mm
12PAR30L/AMB/F25/830/DIM ULW	95 mm	115 mm

Product	D	C
12PAR30L/EXPERTCOLOR RETAIL/S10/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR RETAIL/F25/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR RETAIL/F40/930/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR/F25/927/DIM	94.8 mm	93.1 mm
12PAR30L/EXPERTCOLOR/F40/927/DIM	94.8 mm	93.1 mm
12PAR30L/EXPERTCOLOR/F25/940/DIM	94.8 mm	116.1 mm
12PAR30L/EXPERTCOLOR/F40/940/DIM	94.8 mm	116.1 mm

# PAR30/PAR20 LED

## Dimensional drawing



Product	D	C
12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/S10/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/F40/930/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR RETAIL/F25/930/DIMB	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/S10/927/DIM	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/F40/940/DIM	120.7 mm	134.6 mm
12PAR30S/EXPERTCOLOR/F25/927/DIM B	94.8 mm	116.1 mm
12PAR30S/EXPERTCOLOR/F40/927/DIM	94.8 mm	116.1 mm
12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	94.8 mm	93.1 mm
12PAR30S/EXPERTCOLOR/F25/940/DIM	120.7 mm	134.6 mm
12PAR30S/EXPERTCOLOR/F25/927/DIM	94.8 mm	93.1 mm

Product	D	C
7PAR20/LED/F25/827-822/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/830/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/840/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F40/827-822/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F25/840/E26/GL/DIM 120V	63 mm	85.5 mm
7PAR20/LED/F25/830/E26/GL/DIM 120V	63 mm	85.5 mm

Product	D	C
10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	94 mm	93 mm
10PAR30S/LED/827/F25/DIM/ULW/120V 6/1FB	94 mm	93 mm
10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	94 mm	93 mm
10PAR30S/LED/840/F25/DIM/ULW/120V 6/1FB	94 mm	93 mm
10PAR30S/LED/840/F40/DIM/ULW/120V 6/1FB	94 mm	93 mm
10PAR30S/LED/830/F40/DIM/ULW/120V 6/1FB	94 mm	93 mm

Product	D	C
10PAR30L/LED/827/F40/DIM/ULW/120V 6/1FB	94 mm	118 mm
10PAR30L/LED/827/F25/DIM/ULW/120V 6/1FB	94 mm	118 mm
10PAR30L/LED/840/F25/DIM/ULW/120V 6/1FB	94 mm	118 mm
10PAR30L/LED/830/F40/DIM/ULW/120V 6/1FB	94 mm	118 mm
10PAR30L/LED/840/F40/DIM/ULW/120V 6/1FB	94 mm	118 mm
10PAR30L/LED/830/F25/DIM/ULW/120V 6/1FB	94 mm	118 mm

# PAR30/PAR20 LED

Controls and Dimming	
Dimmable	Yes
Operating and Electrical	
Voltage (Nom)	120 V
Starting Time (Nom)	0.5 s
General Information	
Cap-Base	E26
Light Technical	
Lmf At End Of Nominal Lifetime (Nom)	70 %

## Operating and Electrical

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
471037	12PAR30L/EC RETAIL/ S10/930/DIM 6/1	60 Hz	75 W	12 W
471045	12PAR30L/EC RETAIL/ F25/930/DIM 6/1	60 Hz	75 W	12 W
471052	12PAR30L/EC RETAIL/ F40/930/DIM 6/1	60 Hz	75 W	12 W
471060	12PAR30S/EC RETAIL/ S10/930/DIM 6/1	60 Hz	75 W	12 W
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	60 Hz	75 W	12 W
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	60 Hz	75 W	12 W
470970	12PAR30L/EC/F25/940/DIM/120V 6/1	60 Hz	75 W	12 W
470988	12PAR30L/EC/F40/940/DIM/120V 6/1	60 Hz	75 W	12 W
471078	12PAR30S/EC RETAIL/ F25/930/DIM 6/1	60 Hz	75 W	12 W
471086	12PAR30S/EC RETAIL/ F40/930/DIM 6/1	60 Hz	75 W	12 W
470898	12PAR30S/EC/S10/927/DIM/120V 6/1	60 Hz	75 W	12 W
470954	12PAR30L/EC/F25/927/DIM/120V 6/1	60 Hz	75 W	12 W
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	60 Hz	75 W	12 W
471789	12PAR30S/EXPERTCOLOR/ S10/940/DIM/120V	60 Hz	75 W	12 W
471094	12PAR30S/EC RETAIL/ F25/930/DIM 6/1	60 Hz	75 W	12 W
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	60 Hz	75 W	12 W
467829	12PAR30L/AMB/F25/830/DIM ULW	50 to 60 Hz	75 W	12 W

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	50 to 60 Hz	75 W	12 W
471110	7PAR20/LED/ F25/830/E26/GL/DIM 120V 6/1	60 Hz	50 W	7 W
471128	7PAR20/LED/ F25/840/E26/GL/DIM 120V 6/1	60 Hz	50 W	7 W
471144	7PAR20/LED/ F40/830/E26/GL/DIM 120V 6/1	60 Hz	50 W	7 W
471151	7PAR20/LED/ F40/840/E26/GL/DIM 120V 6/1	60 Hz	50 W	7 W
471102	7PAR20/LED/ 827-822/F25/GL/DIM 1PK 6/1	60 Hz	50 W	7 W
471136	7PAR20/LED/ 827-822/F40/GL/DIM 1PK 6/1	60 Hz	50 W	7 W
529768	10PAR30S/LED/827/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529776	10PAR30S/LED/830/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529784	10PAR30S/LED/840/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529792	10PAR30S/LED/827/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529800	10PAR30S/LED/830/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529818	10PAR30S/LED/840/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529701	10PAR30L/LED/827/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529719	10PAR30L/LED/830/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529727	10PAR30L/LED/840/F25/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529735	10PAR30L/LED/827/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W

## PAR30/PAR20 LED

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
529743	10PAR30L/LED/830/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W
529750	10PAR30L/LED/840/F40/DIM/UL W/120V 6/1FB	50 to 60 Hz	75 W	10 W

Order Code	Full Product Name	Input Frequency	Wattage Equivalent	Power (Rated) (Nom)
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	60 Hz	75 W	12 W
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	60 Hz	75 W	12 W

### General Information

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
471037	12PAR30L/EC RETAIL/S10/930/DIM 6/1	25000 h	25000 h	50000X
471045	12PAR30L/EC RETAIL/F25/930/DIM 6/1	25000 h	25000 h	50000X
471052	12PAR30L/EC RETAIL/F40/930/DIM 6/1	25000 h	25000 h	50000X
471060	12PAR30S/EC RETAIL/S10/930/DIM 6/1	25000 h	25000 h	50000X
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	40000 h	40000 h	50000X
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	40000 h	40000 h	50000X
470970	12PAR30L/EC/F25/940/DIM/120V 6/1	40000 h	40000 h	50000X
470988	12PAR30L/EC/F40/940/DIM/120V 6/1	40000 h	40000 h	50000X
471078	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25000 h	25000 h	50000X
471086	12PAR30S/EC RETAIL/F40/930/DIM 6/1	25000 h	25000 h	50000X
470898	12PAR30S/EC/S10/927/DIM/120V 6/1	40000 h	40000 h	50000X
470954	12PAR30L/EC/F25/927/DIM/120V 6/1	40000 h	40000 h	50000X
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	40000 h	40000 h	50000X
471789	12PAR30S/EXPERTCOLOR/ S10/940/DIM/120V	40000 h	40000 h	50000X
471094	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25000 h	25000 h	50000X
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	40000 h	40000 h	50000X
467829	12PAR30L/AMB/F25/830/DIM ULW	25000 h	25000 h	50000X
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25000 h	25000 h	50000X
471110	7PAR20/LED/F25/830/E26/GL/DIM 120V 6/1	25000 h	25000 h	25000X
471128	7PAR20/LED/F25/840/E26/GL/DIM 120V 6/1	25000 h	25000 h	25000X

Order Code	Full Product Name	Nominal Lifetime (Nom)	Rated Lifetime (Hours)	Switching Cycle
471144	7PAR20/LED/F40/830/E26/GL/DIM 120V 6/1	25000 h	25000 h	25000X
471151	7PAR20/LED/F40/840/E26/GL/DIM 120V 6/1	25000 h	25000 h	25000X
471102	7PAR20/LED/827-822/F25/GL/DIM 1PK 6/1	25000 h	25000 h	25000X
471136	7PAR20/LED/827-822/F40/GL/DIM 1PK 6/1	25000 h	25000 h	25000X
529768	10PAR30S/LED/827/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529776	10PAR30S/LED/830/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529784	10PAR30S/LED/840/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529792	10PAR30S/LED/827/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529800	10PAR30S/LED/830/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529818	10PAR30S/LED/840/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529701	10PAR30L/LED/827/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529719	10PAR30L/LED/830/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529727	10PAR30L/LED/840/F25/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529735	10PAR30L/LED/827/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529743	10PAR30L/LED/830/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
529750	10PAR30L/LED/840/F40/DIM/ULW/ 120V 6/1FB	25000 h	25000 h	25000X
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	40000 h	40000 h	50000X
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	40000 h	40000 h	50000X

# PAR30/PAR20 LED

## Light Technical (1/2)

Order Code	Full Product Name	Beam Angle (Nom)	Correlated Color		Color			
			Color Code	Temperature (Nom)	Rendering Index (Nom)	Luminous Flux (Nom)	Luminous Flux (Rated) (Nom)	Luminous Intensity (Nom)
471037	12PAR30L/EC RETAIL/S10/930/DIM 6/1	10 °	930	3000 K	90	880 lm	880 lm	10000 cd
471045	12PAR30L/EC RETAIL/F25/930/DIM 6/1	25 °	930	3000 K	90	880 lm	880 lm	4500 cd
471052	12PAR30L/EC RETAIL/F40/930/DIM 6/1	40 °	930	3000 K	90	880 lm	880 lm	2000 cd
471060	12PAR30S/EC RETAIL/S10/930/DIM 6/1	10 °	930	3000 K	90	880 lm	880 lm	10000 cd
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	40 °	927	2700 K	95	850 lm	850 lm	1800 cd
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	25 °	927	2700 K	95	850 lm	850 lm	4200 cd
470970	12PAR30L/EC/F25/940/DIM/120V 6/1	25 °	940	4000 K	95	950 lm	950 lm	4800 cd
470988	12PAR30L/EC/F40/940/DIM/120V 6/1	40 °	940	4000 K	95	950 lm	950 lm	2100 cd
471078	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25 °	930	3000 K	90	880 lm	880 lm	4500 cd
471086	12PAR30S/EC RETAIL/F40/930/DIM 6/1	40 °	930	3000 K	90	880 lm	880 lm	2000 cd
470898	12PAR30S/EC/S10/927/DIM/120V 6/1	10 °	927	2700 K	95	850 lm	850 lm	10000 cd
470954	12PAR30L/EC/F25/927/DIM/120V 6/1	25 °	927	2700 K	95	850 lm	850 lm	4200 cd
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	40 °	927	2700 K	95	850 lm	850 lm	1800 cd
471789	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	10 °	940	4000 K	95	950 lm	950 lm	10500 cd
471094	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25 °	930	3000 K	90	880 lm	880 lm	4500 cd
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	25 °	927	2700 K	95	850 lm	850 lm	4200 cd
467829	12PAR30L/AMB/F25/830/DIM ULW	25 °	830	3000 K	80	850 lm	850 lm	3300 cd
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25 °	841	4000 K	80	850 lm	850 lm	3300 cd
471110	7PAR20/LED/F25/830/E26/GL/DIM 120V 6/1	25 °	830	3000 K	80	500 lm	500 lm	1500 cd
471128	7PAR20/LED/F25/840/E26/GL/DIM 120V 6/1	25 °	841	4000 K	80	500 lm	500 lm	1500 cd
471144	7PAR20/LED/F40/830/E26/GL/DIM 120V 6/1	40 °	830	3000 K	80	500 lm	500 lm	1000 cd
471151	7PAR20/LED/F40/840/E26/GL/DIM 120V 6/1	40 °	841	4000 K	80	500 lm	500 lm	1000 cd
471102	7PAR20/LED/827-822/F25/GL/DIM 1PK 6/1	25 °	822-827	2200-2700 K	80	500 lm	500 lm	1300 cd
471136	7PAR20/LED/827-822/F40/GL/DIM 1PK 6/1	40 °	822-827	2200-2700 K	80	500 lm	500 lm	800 cd
529768	10PAR30S/LED/827/F25/DIM/ULW/120V 6/1FB	25 °	827	2700 K	80	800 lm	800 lm	3300 cd
529776	10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	25 °	830	3000 K	80	850 lm	850 lm	3300 cd
529784	10PAR30S/LED/840/F25/DIM/ULW/120V 6/1FB	25 °	841	4000 K	80	850 lm	850 lm	3300 cd
529792	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	40 °	827	2700 K	80	800 lm	800 lm	1600 cd
529800	10PAR30S/LED/830/F40/DIM/ULW/120V 6/1FB	40 °	830	3000 K	80	850 lm	850 lm	1600 cd
529818	10PAR30S/LED/840/F40/DIM/ULW/120V 6/1FB	40 °	841	4000 K	80	850 lm	850 lm	1600 cd
529701	10PAR30L/LED/827/F25/DIM/ULW/120V 6/1FB	25 °	827	2700 K	80	800 lm	800 lm	3300 cd
529719	10PAR30L/LED/830/F25/DIM/ULW/120V 6/1FB	25 °	830	3000 K	80	850 lm	850 lm	3300 cd
529727	10PAR30L/LED/840/F25/DIM/ULW/120V 6/1FB	25 °	841	4000 K	80	850 lm	850 lm	3300 cd
529735	10PAR30L/LED/827/F40/DIM/ULW/120V 6/1FB	40 °	827	2700 K	80	800 lm	800 lm	1600 cd
529743	10PAR30L/LED/830/F40/DIM/ULW/120V 6/1FB	40 °	830	3000 K	80	850 lm	850 lm	1600 cd
529750	10PAR30L/LED/840/F40/DIM/ULW/120V 6/1FB	40 °	841	4000 K	80	850 lm	850 lm	1600 cd
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	25 °	940	4000 K	95	950 lm	950 lm	4800 cd
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	40 °	940	4000 K	95	950 lm	950 lm	2100 cd

## Light Technical (2/2)

Order Code	Full Product Name	Rated Beam Angle	Order Code	Full Product Name	Rated Beam Angle
471037	12PAR30L/EC RETAIL/S10/930/DIM 6/1	10 °	470970	12PAR30L/EC/F25/940/DIM/120V 6/1	25 °
471045	12PAR30L/EC RETAIL/F25/930/DIM 6/1	25 °	470988	12PAR30L/EC/F40/940/DIM/120V 6/1	40 °
471052	12PAR30L/EC RETAIL/F40/930/DIM 6/1	40 °	471078	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25 °
471060	12PAR30S/EC RETAIL/S10/930/DIM 6/1	10 °	471086	12PAR30S/EC RETAIL/F40/930/DIM 6/1	40 °
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	40 °	470898	12PAR30S/EC/S10/927/DIM/120V 6/1	10 °
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	25 °	470954	12PAR30L/EC/F25/927/DIM/120V 6/1	25 °

## PAR30/PAR20 LED

Order Code	Full Product Name	Rated Beam Angle
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	40 °
471789	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	10 °
471094	12PAR30S/EC RETAIL/F25/930/DIM 6/1	25 °
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	25 °
467829	12PAR30L/AMB/F25/830/DIM ULW	25 °
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	25 °
471110	7PAR20/LED/F25/830/E26/GL/DIM 120V 6/1	25 °
471128	7PAR20/LED/F25/840/E26/GL/DIM 120V 6/1	25 °
471144	7PAR20/LED/F40/830/E26/GL/DIM 120V 6/1	40 °
471151	7PAR20/LED/F40/840/E26/GL/DIM 120V 6/1	40 °
471102	7PAR20/LED/827-822/F25/GL/DIM 1PK 6/1	25 °
471136	7PAR20/LED/827-822/F40/GL/DIM 1PK 6/1	40 °
529768	10PAR30S/LED/827/F25/DIM/ULW/120V 6/1FB	25 °

Order Code	Full Product Name	Rated Beam Angle
529776	10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	25 °
529784	10PAR30S/LED/840/F25/DIM/ULW/120V 6/1FB	25 °
529792	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	40 °
529800	10PAR30S/LED/830/F40/DIM/ULW/120V 6/1FB	40 °
529818	10PAR30S/LED/840/F40/DIM/ULW/120V 6/1FB	40 °
529701	10PAR30L/LED/827/F25/DIM/ULW/120V 6/1FB	25 °
529719	10PAR30L/LED/830/F25/DIM/ULW/120V 6/1FB	25 °
529727	10PAR30L/LED/840/F25/DIM/ULW/120V 6/1FB	25 °
529735	10PAR30L/LED/827/F40/DIM/ULW/120V 6/1FB	40 °
529743	10PAR30L/LED/830/F40/DIM/ULW/120V 6/1FB	40 °
529750	10PAR30L/LED/840/F40/DIM/ULW/120V 6/1FB	40 °
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	25 °
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	40 °

### Mechanical and Housing

Order Code	Full Product Name	Bulb Shape
471037	12PAR30L/EC RETAIL/S10/930/DIM 6/1	PAR30L
471045	12PAR30L/EC RETAIL/F25/930/DIM 6/1	PAR30L
471052	12PAR30L/EC RETAIL/F40/930/DIM 6/1	PAR30L
471060	12PAR30S/EC RETAIL/S10/930/DIM 6/1	PAR30S
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	PAR30S
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	PAR30S
470970	12PAR30L/EC/F25/940/DIM/120V 6/1	PAR30L
470988	12PAR30L/EC/F40/940/DIM/120V 6/1	PAR30L
471078	12PAR30S/EC RETAIL/F25/930/DIM 6/1	PAR30S
471086	12PAR30S/EC RETAIL/F40/930/DIM 6/1	PAR30S
470898	12PAR30S/EC/S10/927/DIM/120V 6/1	PAR30S
470954	12PAR30L/EC/F25/927/DIM/120V 6/1	PAR30L
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	PAR30L
471789	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	PAR30S
471094	12PAR30S/EC RETAIL/F25/930/DIM 6/1	PAR30S
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	PAR30S
467829	12PAR30L/AMB/F25/830/DIM ULW	PAR30L
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	PAR30L
471110	7PAR20/LED/F25/830/E26/GL/DIM 120V 6/1	PAR20

Order Code	Full Product Name	Bulb Shape
471128	7PAR20/LED/F25/840/E26/GL/DIM 120V 6/1	PAR20
471144	7PAR20/LED/F40/830/E26/GL/DIM 120V 6/1	PAR20
471151	7PAR20/LED/F40/840/E26/GL/DIM 120V 6/1	PAR20
471102	7PAR20/LED/827-822/F25/GL/DIM 1PK 6/1	PAR20
471136	7PAR20/LED/827-822/F40/GL/DIM 1PK 6/1	PAR20
529768	10PAR30S/LED/827/F25/DIM/ULW/120V 6/1FB	PAR30S
529776	10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	PAR30S
529784	10PAR30S/LED/840/F25/DIM/ULW/120V 6/1FB	PAR30S
529792	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	PAR30S
529800	10PAR30S/LED/830/F40/DIM/ULW/120V 6/1FB	PAR30S
529818	10PAR30S/LED/840/F40/DIM/ULW/120V 6/1FB	PAR30S
529701	10PAR30L/LED/827/F25/DIM/ULW/120V 6/1FB	PAR30L
529719	10PAR30L/LED/830/F25/DIM/ULW/120V 6/1FB	PAR30L
529727	10PAR30L/LED/840/F25/DIM/ULW/120V 6/1FB	PAR30L
529735	10PAR30L/LED/827/F40/DIM/ULW/120V 6/1FB	PAR30L
529743	10PAR30L/LED/830/F40/DIM/ULW/120V 6/1FB	PAR30L
529750	10PAR30L/LED/840/F40/DIM/ULW/120V 6/1FB	PAR30L
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	PAR30S
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	PAR30S









### Temperature

Order Code	Full Product Name	T-Case Maximum (Nom)
471037	12PAR30L/EC RETAIL/S10/930/DIM 6/1	85 °C
471045	12PAR30L/EC RETAIL/F25/930/DIM 6/1	85 °C
471052	12PAR30L/EC RETAIL/F40/930/DIM 6/1	85 °C
471060	12PAR30S/EC RETAIL/S10/930/DIM 6/1	90 °C
470914	12PAR30S/EC/F40/927/DIM/120V 6/1	90 °C
470922	12PAR30S/EC/F25/927/DIM/120V B 6/1	90 °C
470970	12PAR30L/EC/F25/940/DIM/120V 6/1	85 °C
470988	12PAR30L/EC/F40/940/DIM/120V 6/1	85 °C
471078	12PAR30S/EC RETAIL/F25/930/DIM 6/1	90 °C
471086	12PAR30S/EC RETAIL/F40/930/DIM 6/1	90 °C
470898	12PAR30S/EC/S10/927/DIM/120V 6/1	90 °C

Order Code	Full Product Name	T-Case Maximum (Nom)
470954	12PAR30L/EC/F25/927/DIM/120V 6/1	85 °C
470962	12PAR30L/EC/F40/927/DIM/120V 6/1	85 °C
471789	12PAR30S/EXPERTCOLOR/S10/940/DIM/120V	90 °C
471094	12PAR30S/EC RETAIL/F25/930/DIM 6/1	90 °C
470906	12PAR30S/EC/F25/927/DIM/120V 6/1	90 °C
467829	12PAR30L/AMB/F25/830/DIM ULW	85 °C
467837	12PAR30L/AMB/F25/840/DIM ULW 6/1	85 °C
471110	7PAR20/LED/F25/830/E26/GL/DIM 120V 6/1	90 °C
471128	7PAR20/LED/F25/840/E26/GL/DIM 120V 6/1	90 °C
471144	7PAR20/LED/F40/830/E26/GL/DIM 120V 6/1	90 °C
471151	7PAR20/LED/F40/840/E26/GL/DIM 120V 6/1	90 °C

# PAR30/PAR20 LED











Order Code	Full Product Name	T-Case Maximum (Nom)
471102	7PAR20/LED/827-822/F25/GL/DIM 1PK 6/1	82 °C
471136	7PAR20/LED/827-822/F40/GL/DIM 1PK 6/1	82 °C
529768	10PAR30S/LED/827/F25/DIM/ULW/120V 6/1FB	70 °C
529776	10PAR30S/LED/830/F25/DIM/ULW/120V 6/1FB	70 °C
529784	10PAR30S/LED/840/F25/DIM/ULW/120V 6/1FB	70 °C
529792	10PAR30S/LED/827/F40/DIM/ULW/120V 6/1FB	70 °C
529800	10PAR30S/LED/830/F40/DIM/ULW/120V 6/1FB	70 °C
529818	10PAR30S/LED/840/F40/DIM/ULW/120V 6/1FB	70 °C
529701	10PAR30L/LED/827/F25/DIM/ULW/120V 6/1FB	67 °C
529719	10PAR30L/LED/830/F25/DIM/ULW/120V 6/1FB	67 °C
529727	10PAR30L/LED/840/F25/DIM/ULW/120V 6/1FB	67 °C
529735	10PAR30L/LED/827/F40/DIM/ULW/120V 6/1FB	67 °C
529743	10PAR30L/LED/830/F40/DIM/ULW/120V 6/1FB	67 °C
529750	10PAR30L/LED/840/F40/DIM/ULW/120V 6/1FB	67 °C
470930	12PAR30S/EC/F25/940/DIM/120V 6/1	90 °C
470948	12PAR30S/EC/F40/940/DIM/120V 6/1	90 °C

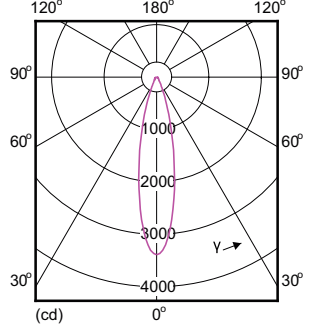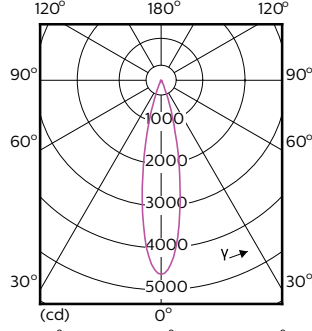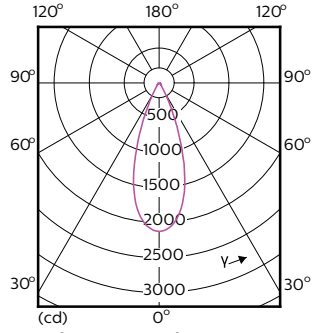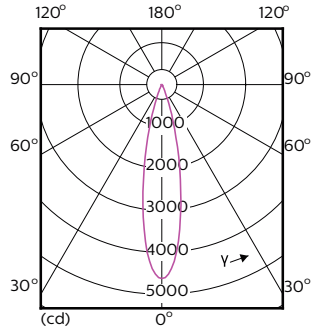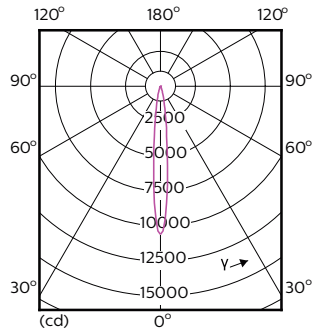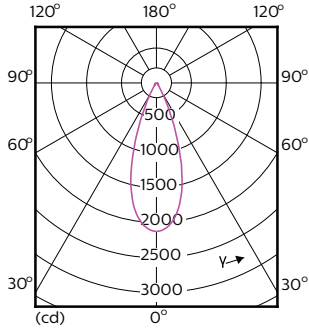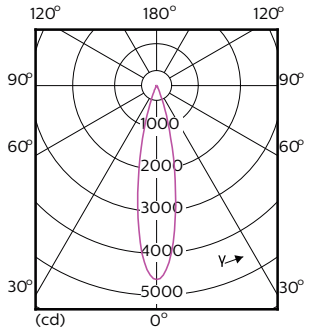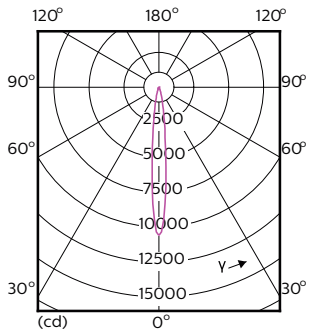














# PAR30/PAR20 LED



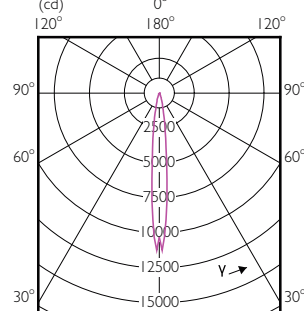
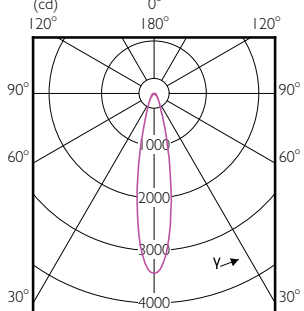
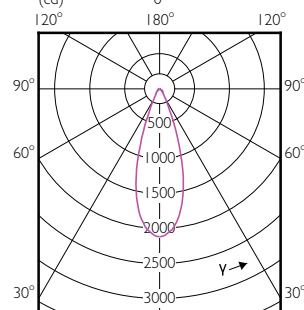
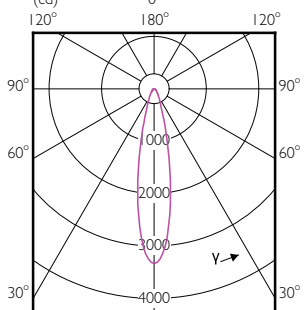
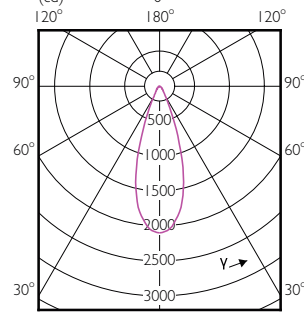
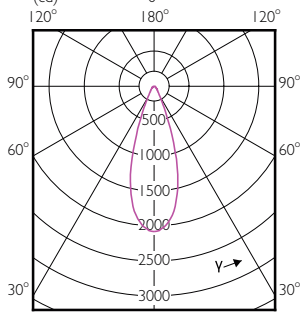
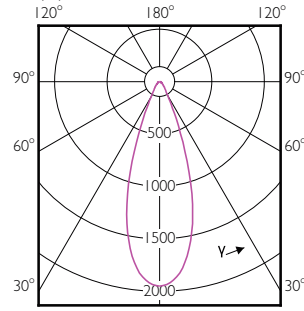
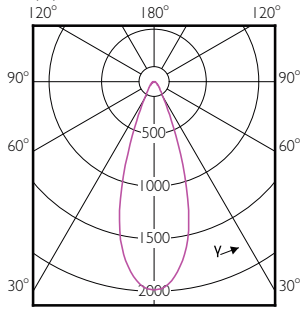
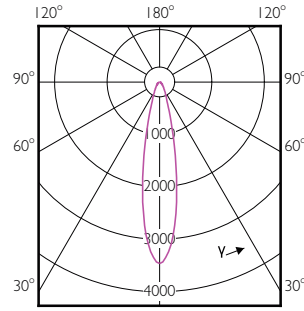
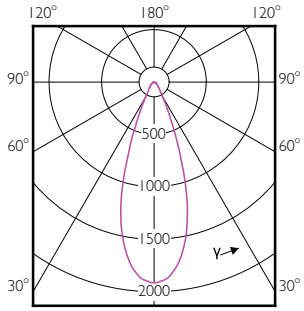


# PAR30/PAR20 LED




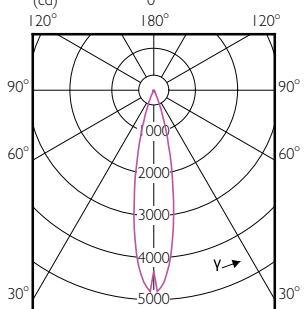
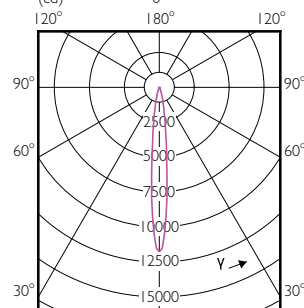
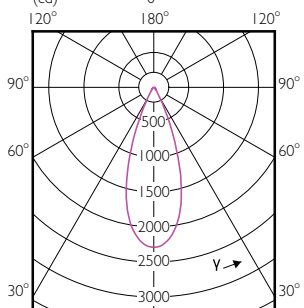
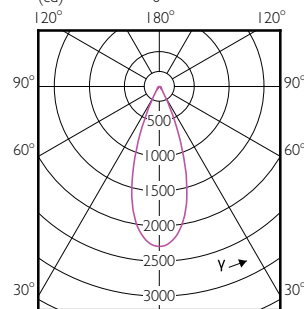
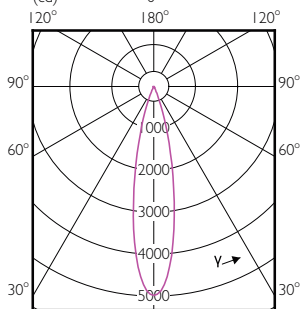
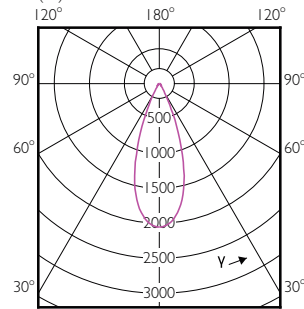
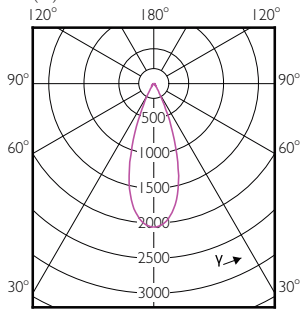
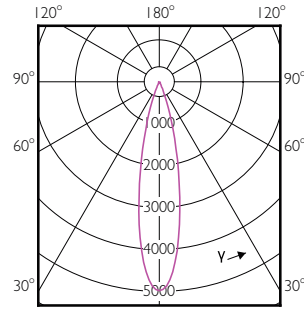
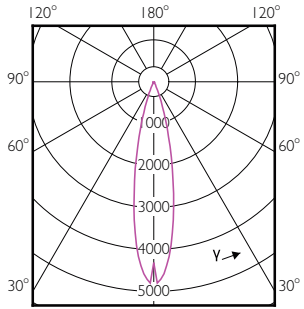




Accent Diagrams




Accent Diagrams












# PAR30/PAR20 LED













## Accent Diagrams



## Beam Diagrams




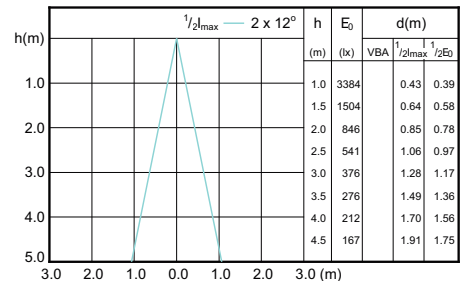
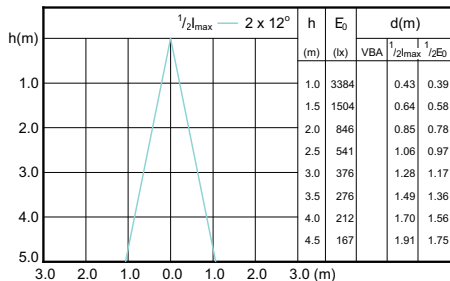
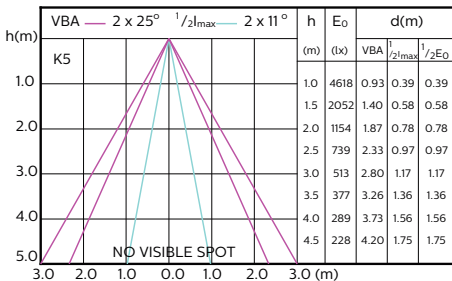
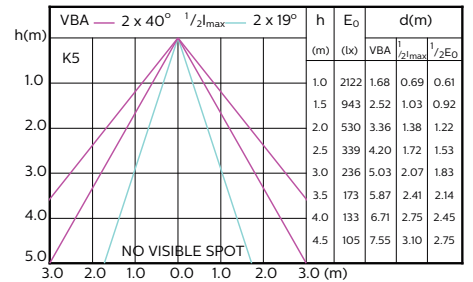
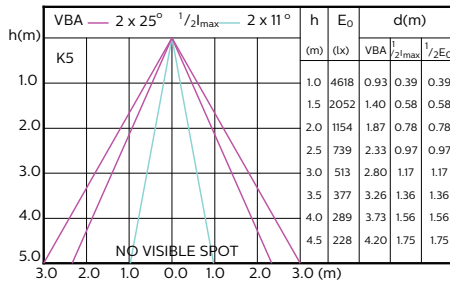
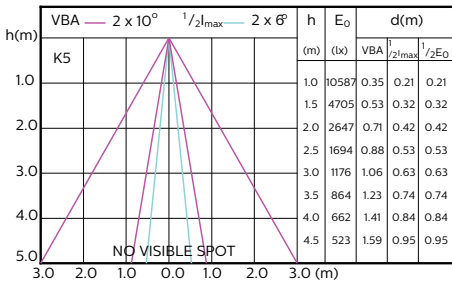
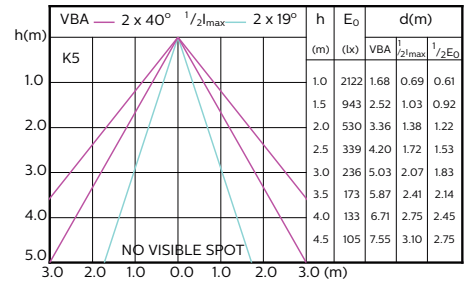
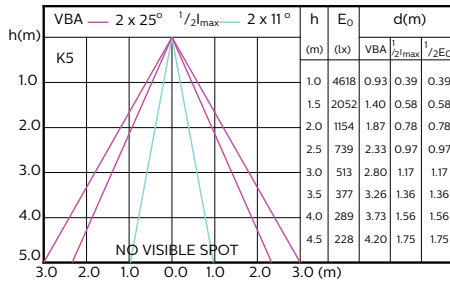
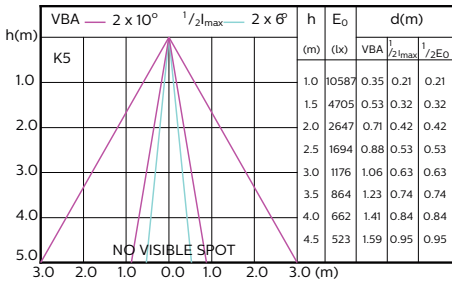


Beam Diagrams

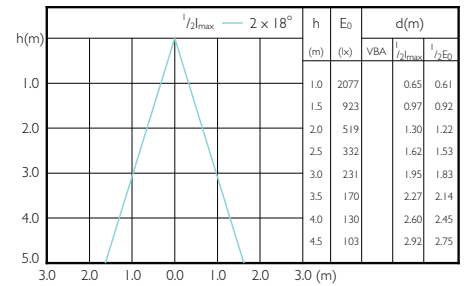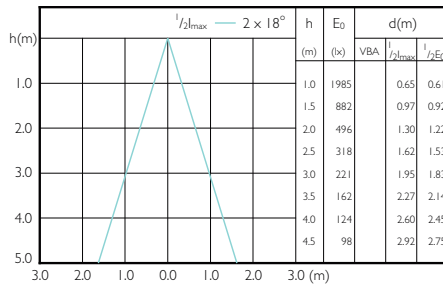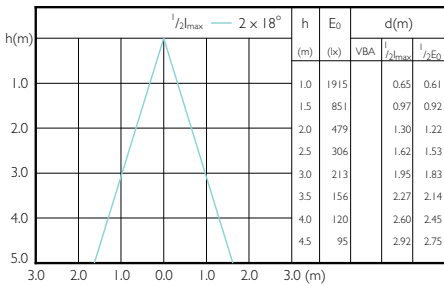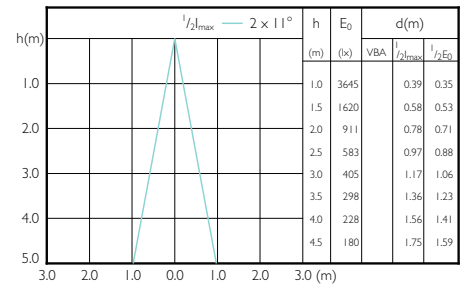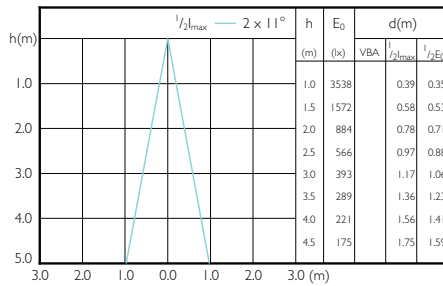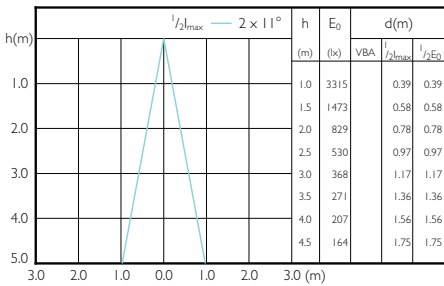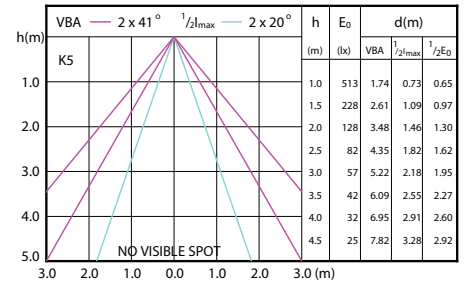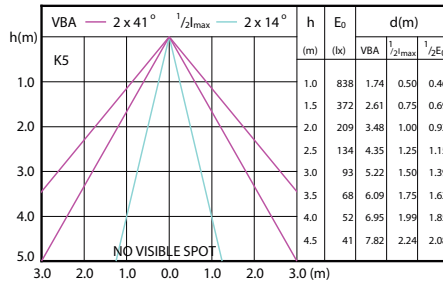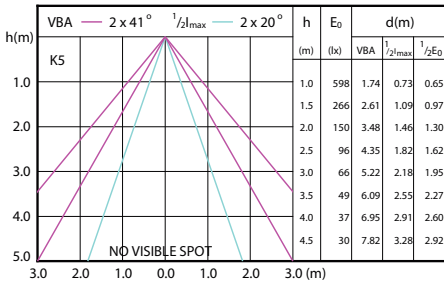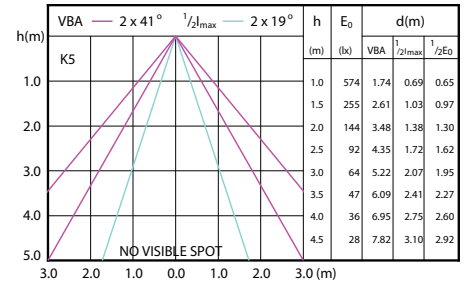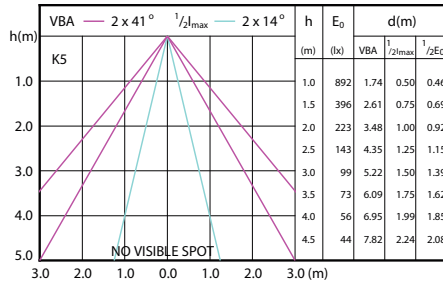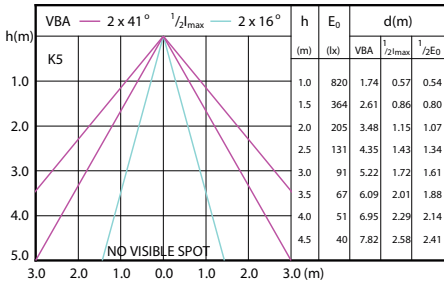



Beam Diagrams

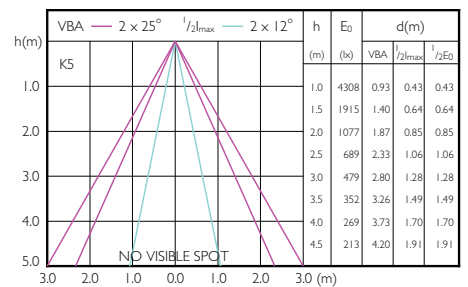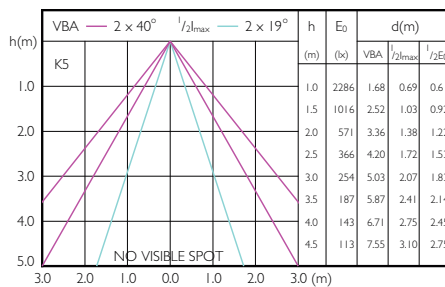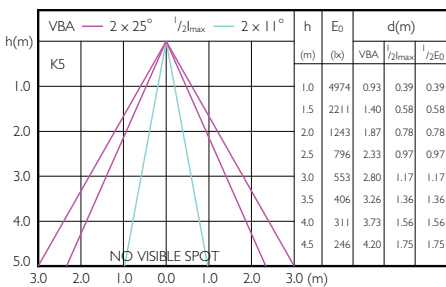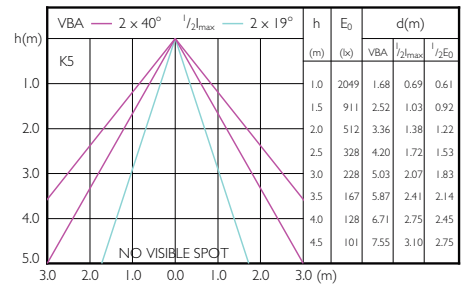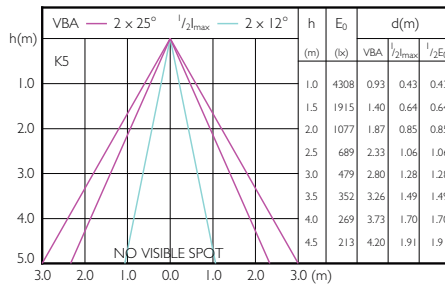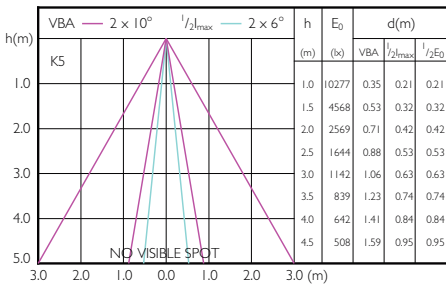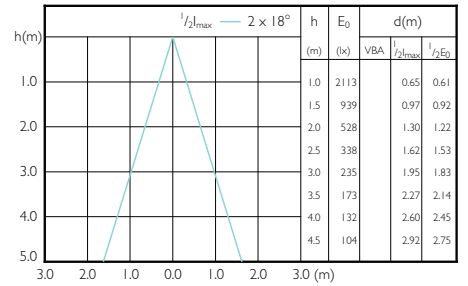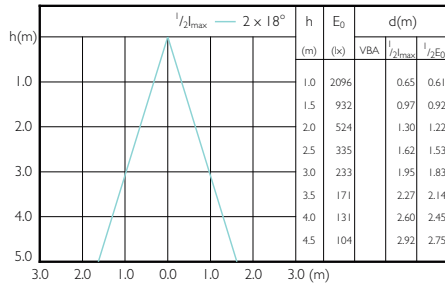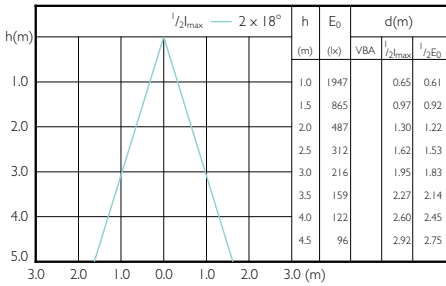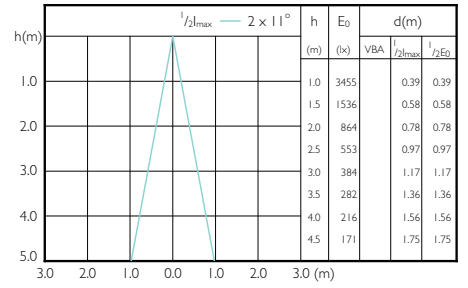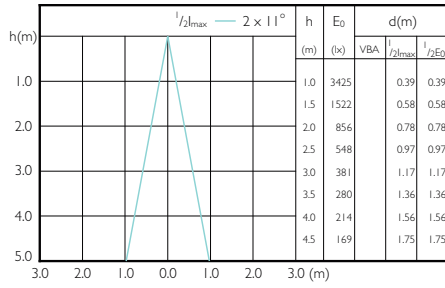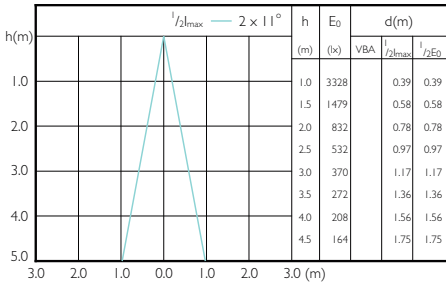

# PAR30/PAR20 LED

## Beam Diagrams

