

CP - COMMERCIAL CEILING FAN

Ideally suited for circulating air in Industrial and Commercial Applications. Canarm's "CP" Fans help save energy year round.

FEATURES

- Available with 36", 48" and 56" blade sweeps.
- Variable speed motor (all motors are impedance protected, PSC type variable speed with permanently lubricated ball bearing motors).
- When used with our MC series speed controls the speed range is infinite.
- Painted steel blades with curved ends deliver maximum airflow over wide areas.
- All models are reversible (exception: CP56 c/w cord & plug is downdraft only).
- Reversible motor provides both winter destratification and summer time cooling.



Downrods available as accessories in 8" or 36" sizes. See next page.

Black now available in 36" and 48".

| MODEL NUMBER | COLOR | AIRFLOW | FAN SIZE | MAX RPM | AIR VELOCITY 5' FROM FAN | AIR DELIVERY @ FLOOR | HIGH AMPS | LOW AMPS | HIGH WATTS | LOW WATTS | DOWNROD LENGTH | SHIPPING WEIGHT (LBS.) |
|---|-------|--------------|----------|---------|--------------------------|----------------------|-----------|----------|------------|-----------|----------------|------------------------|
| CP36 | White | Up/Downdraft | 36" | 380 | 750 ft/min | 7,100 cfm | 0.7 | 0.25 | 76 | 28 | 16" | 12 |
| NEW CP36BK | Black | Up/Downdraft | 36" | 380 | 750 ft/min | 7,100 cfm | 0.7 | 0.25 | 76 | 28 | 16" | 12 |
| CP48 | White | Up/Downdraft | 48" | 320 | 700 ft/min | 13,000 cfm | 0.8 | 0.35 | 86 | 36 | 16" | 16 |
| NEW CP48BK | Black | Up/Downdraft | 48" | 320 | 700 ft/min | 13,000 cfm | 0.8 | 0.35 | 86 | 36 | 16" | 16 |
| CP56 F&R | White | Up/Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 16" | 17 |
| CP56S (c/w 36" downrod) | White | Up/Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 36" | 19 |
| CP56 C&P c/w cord & plug, non-reversible | White | Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 16" | 18 |
| CP56 BR | Brown | Up/Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 16" | 17 |
| CP56FRBK | Black | Up/Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 16" | 18 |
| NEW CP56WH c/w Speed Control, Non reversible | White | Downdraft | 56" | 310 | 660 ft/min | 20,500 cfm | 0.9 | 0.4 | 97 | 40 | 16" | 17 |



HPWP - HIGH PERFORMANCE CEILING FANS

Engineered and designed for general applications where above average area coverage and cooling velocity are required.

FEATURES

- Reversible motor for both winter destratification and summer time cooling
- Fans are sealed and suitable for high moisture applications.
- All high performance fans are weather resistant.
- Straight blades and heavy duty motors for higher air movement and better cooling capacity.

36" downrod available as an accessory. See next page.

| MODEL NUMBER | COLOR | AIRFLOW | FAN SIZE | MAX RPM | AIR VELOCITY 5' FROM FAN | AIR DELIVERY @ FLOOR | HIGH AMPS | HIGH WATTS | DOWNROD LENGTH | SHIPPING WEIGHT (LBS.) |
|--------------|-------|--------------|----------|---------|--------------------------|----------------------|-----------|------------|----------------|------------------------|
| CP48 HPWP | White | Up/downdraft | 48" | 325 | 700 ft/min | 21,000 cfm | 0.63 | 62 | 16" | 18 |
| CP56 HPWP | White | Up/downdraft | 56" | 319 | 660 ft/min | 27,500 cfm | 0.83 | 100 | 16" | 24 |
| CP60 HPWP | White | Up/downdraft | 60" | 292 | 650 ft/min | 46,000 cfm | 0.84 | 101 | 16" | 25 |

WINTER ENERGY SAVINGS BY HEAT DESTRATIFICATION

Everyone knows that hot air rises. Buildings with ceilings higher than 8 feet have a significant amount of stored heat at the ceiling that will transfer through the roof and be lost and wasted. The higher the ceiling, the greater amount of energy loss potential from the stored heat at the top of the building. This heat/energy loss can be significantly reduced resulting in lower energy bills by the use of Canarm Ceiling Fans.

There can be as much as 25 degrees Fahrenheit difference between floor and ceiling. Heaters will be working when the floor level temperature is 65°F and there is already 80 degree air at the ceiling ready to be recycled. (See **Figure 1**). The use of Canarm Ceiling Fans in this situation will move this hot air down from the ceiling to create a more even air temperature throughout the building resulting in a more comfortable working environment and potentially reducing your energy bills by as much as 30%. (See **Figure 2**)

SHIPPING DOOR AIR CURTAIN

Cold air entering a building and heat loss from shipping doors is a significant waste of energy in cold weather. A Canarm ceiling fan can be positioned in front of the door pushing air down and out. When the shipping door is opened, the fan helps hold back cold air and the warm air is kept in.

HOW TO CHOOSE A FAN

Ceiling fan choice and layout is based on ceiling height and the floor area of the building. As the height of the ceiling increases, larger and more powerful fans are required to achieve destratification.

The floor air coverage of a fan will be greater the higher the ceiling of the building. This is because of the natural cone shape of the air pattern produced by the fan. *HPWP models have increased floor area coverage because of more powerful motors.

Canarm provides two types of fans:

- The traditional ceiling fan, low cost, good performance, great for dry locations.
- The HPWP high performance, water resistant models - great for more demanding applications with high moisture or greater air velocity requirements. Use the chart to help choose the correct fan size/type and quantity to suit your requirements.




EXAMPLE:

What size and how many fans would be required for a building that is 100 feet wide x 200 feet long and has as ceiling height of 16 feet? A typical layout for a building is illustrated.

- By using the chart, we see that a ceiling height of 16 feet requires a CP56 (56" fan).
- Floor Area of the building = 100 feet wide x 200 feet long = 20,000 square feet.
- From the chart, we know that the Fan Floor Area. Coverage of the CP56 model is 1100 square feet at a 16 foot ceiling height.
- Therefore, the number of fans required = Floor Area of building / Fan Floor Area Coverage 20,000 square feet / 1100 square feet = 18 fans.

Note: An additional fan should be used about 10 feet in front of each shipping door to act as an air curtain and reduce heating bills in the winter.

| CEILING HEIGHT (FT.) | SUGGESTED FAN | FAN FLOOR AREA COVERAGE (SQ. FT.) | |
|----------------------|---------------|-----------------------------------|------|
| | | TRADITIONAL | HPWP |
| 10-11 | CP36 | 600 | N/A |
| 12-13 | CP48 | 800 | 950 |
| 14-15 | | 950 | 1150 |
| 16-17 | CP56 | 1100 | 1400 |
| 18-19 | | 1300 | 1600 |
| 20-21 | | 1450 | 1800 |
| 22-25 | CP60 | N/A | 2250 |
| 26-30 | | N/A | 2700 |

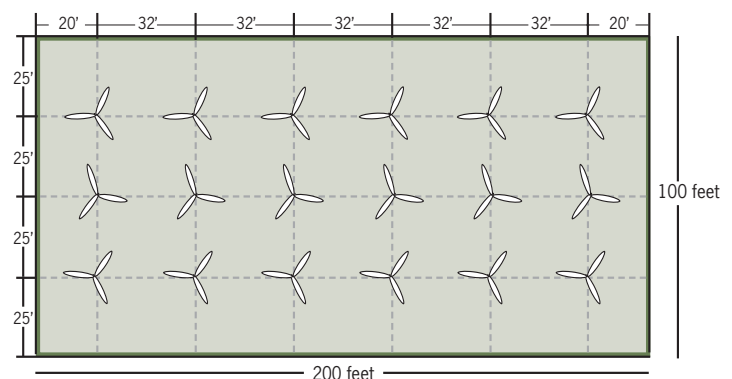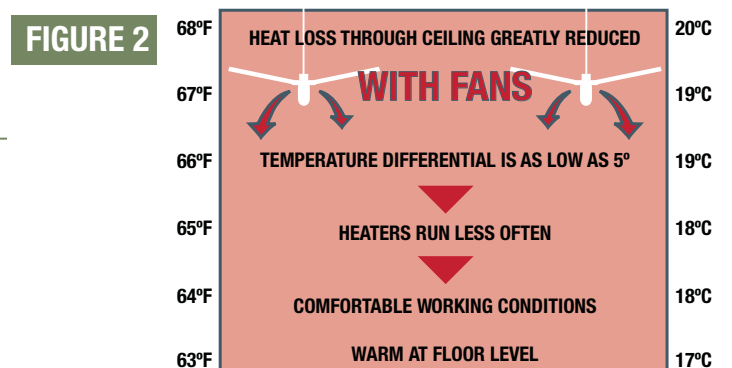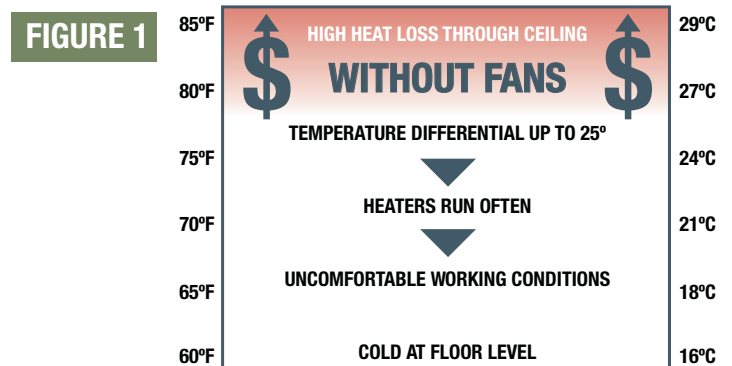



CHROME 56" INDUSTRIAL FAN

Light Duty

FEATURES

- 56" blade sweeps
- 3 metal blades
- J Hook hanger for ceiling fan approved electrical box
- 4-Speed wall control included
- Also available in black

Downrods available as accessories in 36". See below.


| MODEL NUMBER | COLOR | AIRFLOW | FAN SIZE | MAX RPM | AIR VELOCITY 5' FROM FAN | AIR DELIVERY @ FLOOR | HIGH AMPS | LOW AMPS | HIGH WATTS | LOW WATTS | DOWNROD LENGTH | SHIPPING WEIGHT (LBS.) |
|---|--------|-----------|----------|---------|--------------------------|----------------------|-----------|----------|------------|-----------|----------------|------------------------|
| NEW LIGHT COMMERCIAL | | | | | | | | | | | | |
| CP56CH - approved for Electrical Box c/w 4 speed wall control | Chrome | Downdraft | 56" | 282 | 200ft/min | 6190 cfm | 0.6 | 0.19 | 63 | 9 | 12" | 16 |
| CP56BK - approved for Electrical Box c/w 4 speed wall control | Black | Downdraft | 56" | 282 | 200ft/min | 6190 cfm | 0.6 | 0.19 | 63 | 9 | 12" | 16 |

FAN GUARDS & ACCESSORIES

CP93-56KD INDUSTRIAL FAN GUARD

Great for factories, farms, schools and warehouses.

- 61" W x 26" H
- Knockdown construction.
- Installs in minutes.
- Use with Canarm CP56, CP48 or CP36 ceiling fans.
- Shipping weight - 21 lbs.



R-B-CPUCLAMP

DOWNRODS & MOUNTING KIT

| MODEL | DESCRIPTION |
|---------------|--|
| DR8CP56 | 8" Downrod for Industrial Ceiling Fans White - Not for HPWP models |
| DR36CP56 | 36" Downrod for Industrial Ceiling Fans White - Not for HPWP models |
| DR36CP56BK | 36" Downrod for Industrial Ceiling Fans Black - Not for HPWP models |
| DR36CP56HP | 36" Downrod for Industrial Ceiling Fans White - For HPWP models only |
| CP99 | Angular Mounting Kit |
| DR36CP56CH-TS | Downrod for CP56CH - Chrome |
| R-B-CPUCLAMP | U Clamp for mounting CP fans in ceiling fan approved octagon box. |

INDUSTRIAL CEILING FAN CONTROLS

MC CEILING FAN SPEED CONTROLS

- Infinite speed adjustment.
- Minimum speed adjustment screw.
- All controls are designed to fit a standard electrical box.
- Mount in a dry location such as the control room.
- CQ004 - Preferred control for areas where quiet operation is required (ie. churches).



| PART # | MODEL | MAX # OF FANS PER CONTROL | VARIABLE SPEED OPERATION | POWER SUPPLY | AMPERAGE RATING | SHIPPING WEIGHT |
|--------------------------------------|-------|---------------------------|-----------------------------------|--------------|-----------------|-----------------|
| MC CEILING FAN SPEED CONTROLS | | | | | | |
| CN5041 | MC-3 | 2 | MANUAL | 120V/1/60HZ | 2.5 | 0.25 lbs |
| CN5061 | MC-5 | 4 | MANUAL | 120V/1/60HZ | 5 | 0.25 lbs |
| CN5101 | MC-10 | 8 | MANUAL | 120V/1/60HZ | 10 | 0.77 lbs |
| CN5151 | MC-15 | 10 | MANUAL | 120V/1/60HZ | 12 | 0.77 lbs |
| FRMC5 CEILING FAN CONTROLS | | | | | | |
| CNFRMC5 | FRMC5 | 4 | MANUAL C/W FORWARD/REVERSE SWITCH | 120V/1/60HZ | 5 | 0.35 lbs |
| CQ004 - QUIET SPEED CONTROL | | | | | | |
| CQ004 | CQ004 | 1 | OFF / HIGH / MEDIUM / LOW | 120V/1/60HZ | 1.25 | 0.25 lbs |