

PLASTIC COMBO RUNNING MAN STANDALONE

LED 120/347VAC Input



Approvals:
CSA Certified
to C22.2 #141.15 and C860


DESCRIPTION

The CPRNP-2 commercial plastic combination running man sign is designed using durable and lightweight high impact thermoplastic. Combination sign with a canopy quick snap for a decorative look or a flush mount for rigid installation.

CIRCUITRY

- LED ultra bright light source
- 120/347VAC Input, field selectable
- 120V/0.46A 3.93W; 347V/0.37A 3.27W max power consumption
- Dry or damp location
- Ambient temperature 10°C to 35°C
- 4.1W at 120V and 3.3W at 347V
- 90 minutes emergency power duration standard
- Two 1W LED heads
- Push button test switch
- Diagnostic/pilot LED for AC ON
- Fully automatic, current limited charger
- Solid state design and construction with brownout and short circuit protection
- Temperature compensated
- Maintenance free, Ni-Cad battery

Flush wall mount backplate. Use for
direct wall mount (no canopy required)
Spider knock-out for wall-mount



Universal
canopy



ORDER SEPARATELY

KOR-FLAT-BP

ORDERING GUIDE

CPRNP-2

Series

CPRNP-2




Tapered
mount

MECHANICAL


- High impact, UV stabilized, thermoplastic construction
- Quick snap faceplates and universal canopy for rapid and simple installation
- Universal faces
- Universal mounting
- White colour is standard
- Fully adjustable, high impact thermoplastic round LED heads are standard

DIMENSIONS

Flush mount

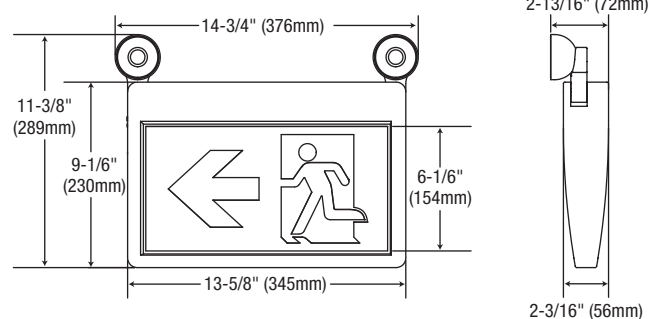

Tapered mount

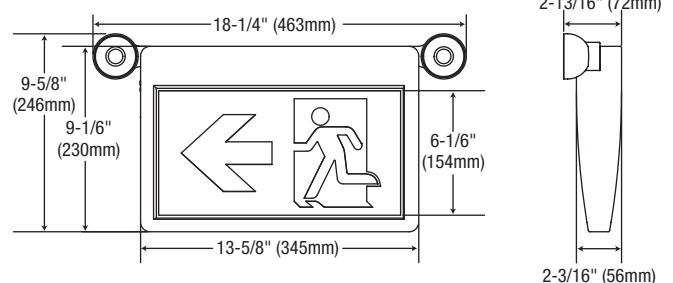

Comes standard with
three pictogram legends
for direction selection.