

LPDL™ CHOICE / E-LUME™ LED LOW PROFILE DOWNLIGHT

Choice / E-Lume™ LPDL™ is a simple and economical solution for any downlight application where an even light is needed. Being less than 1" thick, it can be installed in any types of ceiling.

FEATURES AND SPECIFICATIONS

• Construction

Finition

- White and Brushed Nickel
- 100° and 120° beam angles
- Shape Round : 4" et 6"

• Installation

- LED module with LED driver easily installed with quick connect wire
- Torsion spring mounting clips

• Technical specifications

- Phase-cut dimming
- Color temperature: 3 000 and 4 000 K
- Ambient temperature : -20° to 45°C
- Air tight
- Suitable for damp location
- IC rated
- 80+ CRI

• Compliances

- cETLus
- Energy Star



OVERVIEW

Light source	LED
Watts (W)	9, 11, 12, 14
Lumen output (lm)	600 - 1 000
Efficiency (lm/W)	67 - 72
Color temperature (K)	3 000, 4 000
CRI	80+



QUICK SHIP AND TECHNICAL SPECIFICATION TABLE  ¹

Order code	Description	Watts (W)	Volts (VAC)	Color temp. (K) ²	Lumen output (lm) ³	Efficiency (lm/W)	CRI	Life L70 (hrs) ⁴	Beam angle (°)	Finish	Power factor	THD (%)	Traditional equivalent (W)	Case qty (master)
4" Round White														
67698	LPDL4/RND/9W/30K/WH/CHOICE/STD	9	120	3 000	600	67	80+	50 000	120	White	>0.9	<20	50	32
67700	LPDL4/RND/9W/40K/WH/CHOICE/STD	9	120	4 000	600	67	80+	50 000	120	White	>0.9	<20	50	32
4" Round Brushed Nickel														
66207	LPDL4/RND/11W/30K/BN/ELUME	11	120	3 000	700	64	80+	50 000	100	Brushed Nickel	>0.9	<20	60	32
67933	LPDL4/RND/11W/40K/BN/CHOICE/STD	11	120	4 000	700	64	80+	50 000	100	Brushed Nickel	>0.9	<20	60	32
6" Round White														
67702	LPDL6/RND/12W/30K/WH/CHOICE/STD	12	120	3 000	750	63	80+	50 000	120	White	>0.9	<20	65	24
66211	LPDL6/RND/14W/40K/WH/ELUME	14	120	4 000	1 000	71	80+	50 000	100	White	>0.9	<20	75	24

¹ **QUICK SHIP:** Product availability is subject to change without notice. Please contact your Stanpro customer service representative to confirm inventory levels at time of order.

² Typical color temperature range: +/- 5 %.

³ Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations.

COMPATIBLE DIMMERS

	4" Round Choice	6" Round Choice	4" Round E-Lume	6" Round E-Lume
Brand	Model number			
Legrand	-	-	HCL453P	-
Cooper	RRD-6NA, AAL06, SLC03P	RRD-6NA, AAL06, SLC03P	DAL06P, SLC03P	DAL06P, SLC03P
Lutron	PD-5NE, DVCL-153P, CTCL-153P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P	PD-5NE, DVCL-153P, CTCL-153P, AYCL-253P, DVRP-253P, SELV-300P, MACL-153P	6615, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ	6615, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ
Leviton	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1	IPL06, 6674, DSL06-1LZ, DSM10-1LZ, IPE04-1LZ, DDMX1	AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, PD-6WCL, SELV-300P	AYCL-253P, CTCL-153P, DVCL-153P, DVCL-253P, DVELV-300P, MACL-153P, PD-6WCL, SELV-300P



Dimming range : 10%-100%

NOTE: The above table shows dimmers that have been tested and have demonstrated proper operation under normal conditions. Each installation being unique, various factors such as load, common neutrals or other electrical products on the circuit can, in certain instances, cause variance in system performance. Read and comply to the dimmer installation instructions. Consult dimming system manufacturer for additional support in operation. Standard recommends to use dimmers designed to work with LED products. Older dimmers designed for incandescent products may cause erratic operation. Some dimmers may require more than one product for stable operation. The maximum number of products is determined by the dimmer wattage rating with LEDs. Be careful, these dimmers have different ratings depending on the product type. Again, refer to the dimmer installation instructions.



Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

DIMENSIONS

CHOICE

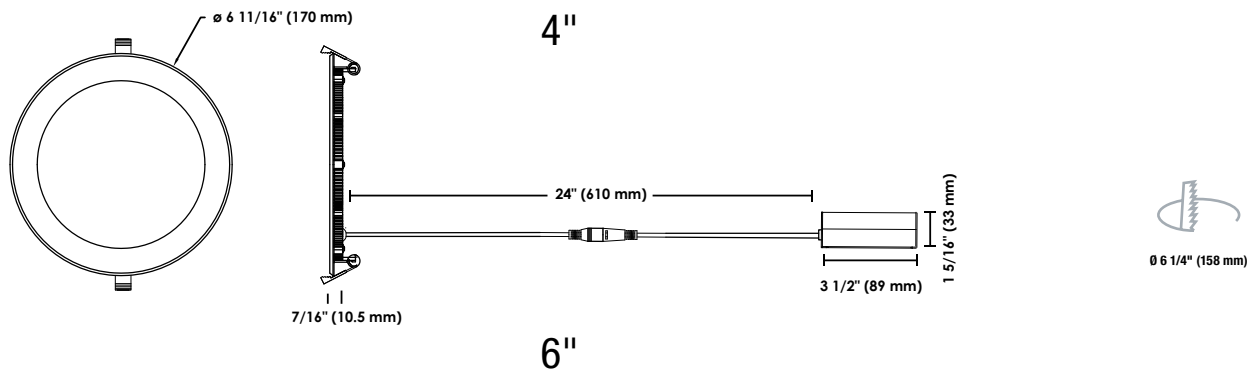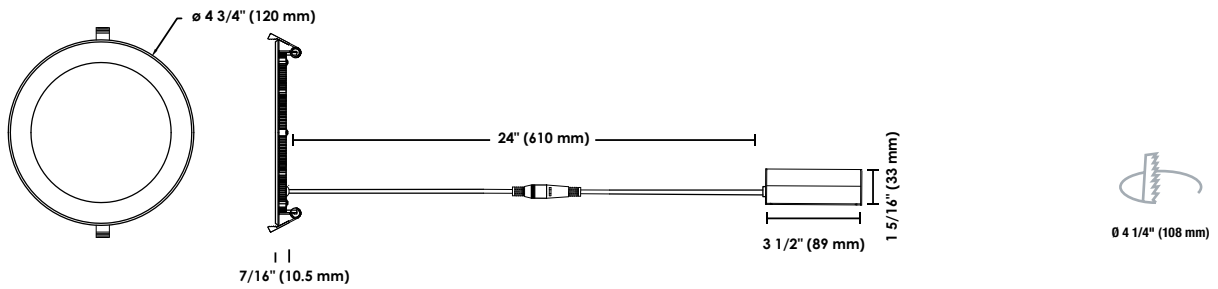

E-LUME

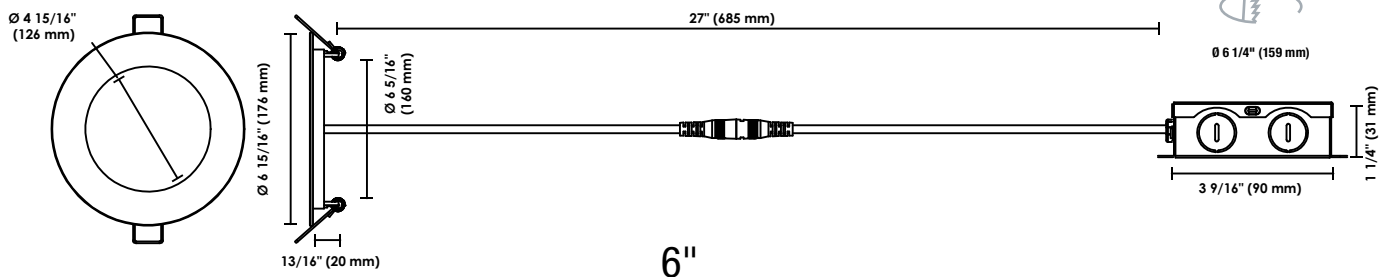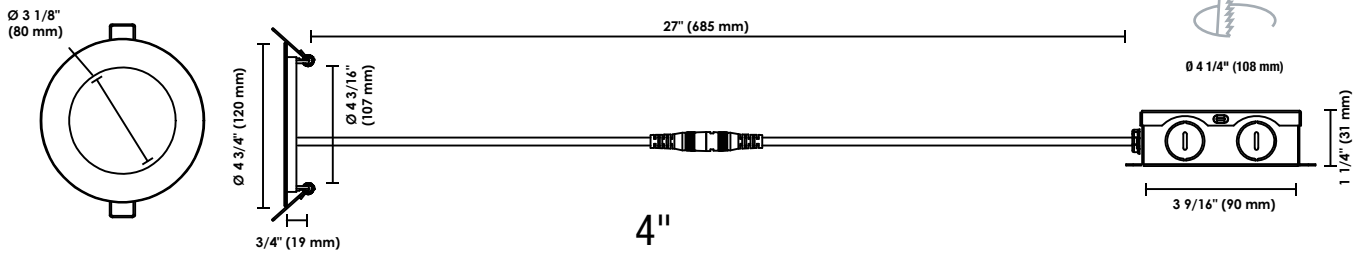

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.