



# LED PAR30 S/L

## 12PAR30L/AMB/F40/827/DIM ULW

Philips LED spots with a single optic beam, provide a clean beam that's free from shadows with beam angles from 15 and 40 degrees to suit every general lighting application.

### Product data

General Information	
Cap-Base	E26 [ Single Contact Medium Screw]
Nominal Lifetime (Nom)	25000 h
Switching Cycle	50000X
Technical Type	12-75W
Light Technical	
Color Code	827 [ CCT of 2700K]
Beam Angle (Nom)	40 °
Luminous Flux (Nom)	850 lm
Luminous Flux (Rated) (Nom)	850 lm
Luminous Intensity (Nom)	1500 cd
Color Designation	Warm White (WW)
Rated Beam Angle	40 °
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	70.00 lm/W
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	12 W
Lamp Current (Nom)	110 mA

Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.9
Voltage (Nom)	120 V

Temperature	
T-Case Maximum (Nom)	85 °C


Controls and Dimming	
Dimmable	Yes

Approval and Application	
Suitable For Accent Lighting	Yes

Product Data	
Order product name	12PAR30L/AMB/F40/827/DIM ULW
EAN/UPC - Product	046677467845
Order code	467845
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929001294404
Net Weight (Piece)	0.285 kg

# LED PAR30 S/L



## Dimensional drawing



12PAR30L/AMB/F40/827/DIM ULW


Product	D	C
12PAR30L/AMB/F40/827/DIM ULW	95 mm	115 mm

## Photometric data

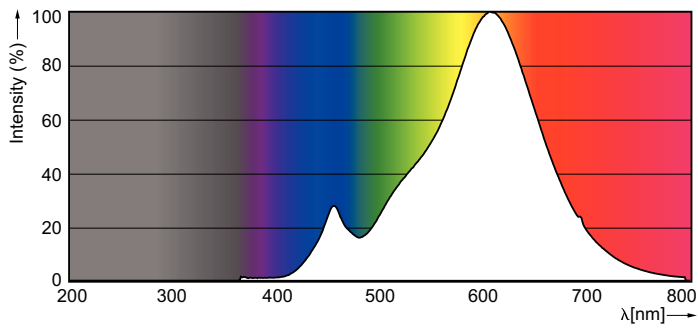

LEDspot E26 PAR38, PAR30L, PAR30S 827

LEDspot 12-75W E26 PAR30L 827 850lm 40D



LEDspot 12-75W E26 PAR30L 827 850lm 40D

## LED PAR30 S/L

