

NPT TYPE NYLON CORD GRIPS

Material: PA (NYLON), UL 94
Hermetic seal: NBR
Protection degree: IP68, 5 Bar, IP69K
Working temperature: -40°C to 100°C in static state
 Instantaneous heat resistance up to 120°C
 -20°C to 80°C in dynamic state
 Instantaneous heat resistance up to 100°C
Colour: Grey, Black

RoHS



CE IP68 TÜV
PRODUCT SERVICE

UL US
LISTED
E360400

UL US *
UL FILE NO.: E360400

UL F1
In Black colour only

IP69K

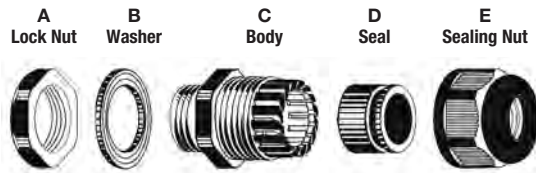

Techspan Part No. Black	Techspan Part No. Grey	AG	Inch	H		GL		Wrench		Package Qty.
				mm	inch	mm	inch	mm	inch	
RDC09NA*	RDC09NA-GR*	3/8" NPT	.15 - .32	22	.866	15	.591	22/19	.866/.748	100
RDC09NR*	RDC09NR-GR*	3/8" NPT	.07 - .24	22	.866	15	.591	22/19	.866/.748	100
RDC13NA	RDC13NA-GR	1/2" NPT	.23 - .47	27	1.063	13	.512	24	.945	50
RDC13NR	RDC13NR-GR	1/2" NPT	.19 - .35	27	1.063	13	.512	24	.945	50
RDC16NA	RDC16NA-GR	1/2" NPT	.39 - .56	28	1.102	13	.512	27	1.063	50
RDC16NR	RDC16NR-GR	1/2" NPT	.27 - .47	28	1.102	13	.512	27	1.063	50
RDC21NA	RDC21NA-GR	3/4" NPT	.51 - .71	31	1.220	14	.551	33	1.299	50
RDC21NR	RDC21NR-GR	3/4" NPT	.35 - .63	31	1.220	14	.551	33	1.299	50
RDC29NA	RDC29NA-GR	1" NPT	.70 - .98	39	1.535	19	.748	42	1.654	20
RDC29NR	RDC29NR-GR	1" NPT	.47 - .79	39	1.535	19	.748	42	1.654	20
RDC36NA	RDC36NA-GR	1-1/4" NPT	.71 - .98	39	1.535	16	.630	46/42	1.811/1.654	10
RDC36NR	RDC36NR-GR	1-1/4" NPT	.51 - .79	39	1.535	16	.630	46/42	1.811/1.654	10

G

