

Technical Information Bulletin

Worklights



Date: _____ Name of distributor: _____
 In hands date of project: _____ Client #: _____
 Project name/Number: _____ Name of end user: _____

ORDERING INFORMATION

Order code: 67021
 Description: PFL/BTRY/100-240/20W/CW/YL/STD
 UPC: 69549670211
 Case quantity: 8



PHYSICAL DATA


Type: LED Flood Light
 Housing colour: Yellow
 Housing Material: Aluminium

PERFORMANCE DATA

Watts (W): 20
 Volts (VAC): 100-240
 Colour temp.: Cool White
 Lumen output (lm)¹: 1 100
 Lumen per Watts (lm/W): 55
 CRI: 70
 Battery at 20% Brightness: 12
 working time (h): at 50% Brightness: 6
 at 100% Brightness: 3
 Battery Charging time (h): 5
 Beam angle (°): 120
 Amperage (A): 4.4
 Battery Specifications: 7.4V 4.4AH
 Environment: Dry
 Operating temp. range: -10°C to 40°C (14°F to 104°F)
 Dimming: Yes

¹ Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %

TECHNICAL DRAWINGS AND DIMENSIONS

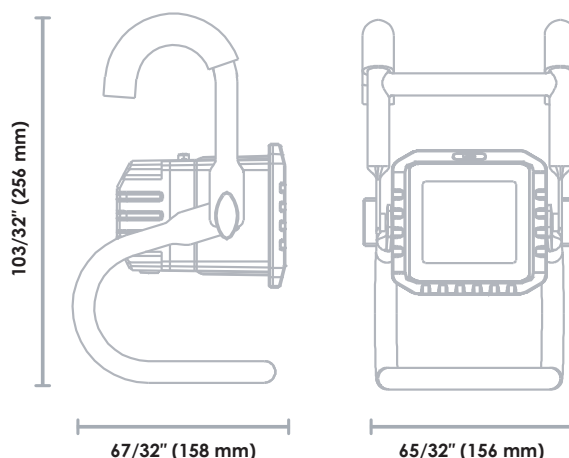

COMPATIBLE ACCESSORIES

Order code	Description	Type
67024	PFL/REPLBTRY/7.4V/20W/YL/STD	20 W replacement battery
67025	PFL/TRIPOD/YL/STD	Tripod
67026	PFL/CHARGER/20W/STD	20 W replacement battery charger

DESCRIPTION AND OTHER OPTIONS

PLF		/	BTRY		/	100-240		/	20W		/	CW		/	YL		/	STD	
Family			Feature			Volts (V)			Watts (W)			Colour Temperature			Colour			Brand	
PLF	Portable Flood Light		BTRY	Battery Powered		100-240 V	100-240 Volts		20W	20 Watts		CW	Cool White		YL	Yellow		STD	STANDARD

Qty	Description	Price

I accept the specifications of the luminaire configuration mentioned above.

Name: _____
 Company: _____
 Signature: _____

Date: _____

Data is based upon tests performed in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. September 11, 2018