




Grounding

GRADIENT MATS & STAPLES

Gradient Control Mat

- Hot dip galvanized, used at switch position in sub-stations.
- Made from 6" x 6" welded mesh 1/4" diameter with pads for installation of 3 grounding connectors.
- Grounding connectors 2/0 AWG-250 MCM included in Cat.No. 6466GCC x 3 pieces.

Cat. No.	Size	Std.Pkg.	Frame	Wt.-lbs./ each
6466GCM	6' x 4'	1	1/8 x 3/4 x 3/4 Angle	35
6466GCC	6' x 4'	1	1/8 x 3/4 x 3/4 c/w conn x 3 pcs. Angle	37
6466GCM1	6' x 4'	1	1/8 x 3/4 x 3/4 (No Connector Pads) Angle	35
6466GCM3	6' x 4'	1	1/8 x 1 x 1 Angle	35
6466GCM5	6' x 4'	1	1/4 x 1-1/4 Bar	35
6466GCM6	6' x 4'	1	1/4 x 1-1/2 Bar	35

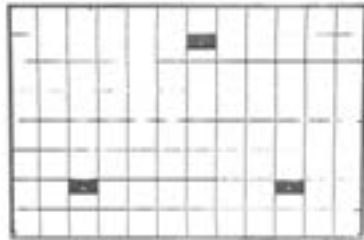

6466GCM



2AWGC

Plastic and Wood Ground Wire Moulding

Cat. No.	Size	Std.Pkg.	Wt.-lbs./ each
701	1/2" plastic moulding in 8' lengths - use # 703 staples	25	2
701W	1/2" wood moulding in 8' lengths - use # 704 staples	10	2
Staples (Galvanized)			
702	2" staple x 1/2" spread	100	3
703	2" staple x 13/16" spread	50	3
704	3" x 1" spread	50	12
705	3" x 1-1/2" spread	100	8
707	1-1/2" x 3/8" spread	100	1
708	2" x 1-1/16" spread	100	3
709	3" x 1-1/16" spread	100	7
713	3" x 1-03/4" spread	50	8

Other sizes available upon request.



701W



703



707