




Bolts

MACHINE BOLTS

Square Head Machine Bolts complete with Square Nuts *Cont'd*

| Cat.No. | L | T | Std. Pkg. | Wt.-lbs./ C |
|-----------------------------|----|-------|-----------|-------------|
| 5/8" Diameter Bolts: | | | | |
| 258M | 2 | 1-1/2 | 25 | 38 |
| 358M | 3 | 1-1/2 | 25 | 45 |
| 458M | 4 | 1-1/2 | 25 | 54 |
| 558M | 5 | 1-1/2 | 25 | 62 |
| 658M | 6 | 1-1/2 | 50 | 70 |
| 858M | 8 | 4 | 50 | 86 |
| 1058M | 10 | 4 | 50 | 102 |
| 1058M-8 | 10 | 8 | 50 | 102 |
| 1258M | 12 | 6 | 50 | 115 |
| 1458M | 14 | 6 | 50 | 130 |
| 1658M | 16 | 6 | 50 | 145 |
| 1858M | 18 | 6 | 25 | 160 |
| 2058M | 20 | 6 | 25 | 175 |
| 2258M | 22 | 6 | 25 | 190 |
| 2458M | 24 | 6 | 25 | 208 |
| 2658M | 26 | 6 | 25 | 226 |
| 2858M | 28 | 6 | 25 | 235 |
| 3/4" Diameter Bolts: | | | | |
| 634M | 6 | 1-3/4 | 50 | 102 |
| 834M | 8 | 4 | 50 | 130 |
| 1034M | 10 | 4 | 50 | 150 |
| 1234M | 12 | 6 | 50 | 175 |
| 1434M | 14 | 6 | 25 | 200 |
| 1634M | 16 | 6 | 25 | 225 |
| 1834M | 18 | 6 | 25 | 245 |
| 2034M | 20 | 6 | 25 | 270 |
| 2234M | 22 | 6 | 25 | 300 |
| 2434M | 24 | 6 | 25 | 320 |
| 2634M | 26 | 6 | 25 | 340 |

Other sizes available upon request.

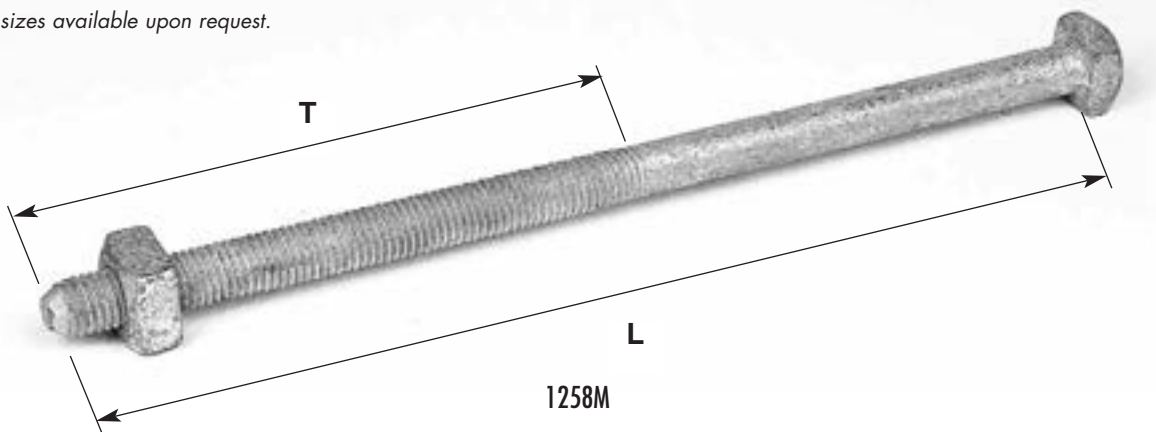



Carriage Bolts

Hot dip galvanized complete with hexagon nuts. C.S.A. Drawing B-33.

| Cat.No. | Dimensions | | | Std.Pkg. | Wt.-lbs./C |
|--|------------|----------|-----------------|----------|------------|
| | (D)iameter | (L)ength | (T)hread Length | | |
| 3/8" Diameter Minimum Breaking Strength 4,500 lbs. | | | | | |
| 1538CB | 3/8 | 1-1/2 | 1/2 | 50 | 12 |
| 2538CB | 3/8 | 2-1/2 | 1 | 50 | 14 |
| 3538CB | 3/8 | 3-1/2 | 1 | 50 | 15 |
| 438CB | 3/8 | 4 | 1 | 50 | 16 |
| 4538CB | 3/8 | 4-1/2 | 1 | 50 | 17 |
| 538CB | 3/8 | 5 | 1 | 50 | 19 |
| 5538CB | 3/8 | 5-1/2 | 1 | 50 | 20 |
| 638CB | 3/8 | 6 | 1 1/4 | 50 | 22 |
| 1/2" Diameter Minimum Breaking Strength 8,500 lbs. | | | | | |
| 412CB | 1/2 | 4 | 1-1/4 | 50 | 32 |
| 4512CB | 1/2 | 4-1/2 | 1-1/4 | 20 | 33 |
| 512CB | 1/2 | 5 | 1-1/4 | 20 | 35 |
| 5512CB | 1/2 | 5-1/2 | 1-1/4 | 20 | 38 |
| 612CB | 1/2 | 6 | 1-1/2 | 20 | 42 |
| 5/8" Diameter Minimum Breaking Strength 13,500 lbs. | | | | | |
| 358CB | 5/8 | 3 | 1-1/2 | 25 | 46 |
| 4558CB | 5/8 | 4-1/2 | 1-1/2 | 25 | 58 |
| 658CB | 5/8 | 6 | 1-3/4 | 25 | 70 |
| 1058CB | 5/8 | 10 | 1-3/4 | 25 | 102 |
| 1258CB | 5/8 | 12 | 1-3/4 | 25 | 115 |

Other sizes available upon request.

