

ANCHORS & GUYING

Sidewalk Guy Struts



K43-1



K43-2



K43-4



K43-3

Cat No.	Pipe Size Inches	Description	Shipping Wt lbs (100 pcs)	Std. Pkg
K43-1	2	Guy Clamp Fitting	300	15
K43-2	2	Pole Plate Fitting	200	15
K43-3*	2 to 2-1/2	Guy Clamp Fitting	500	10
K43-4*	2 to 2-1/2	Pole Plate Fitting	400	10

- ◆ C.S.A. Standard
- ◆ Provides head clearance over sidewalk
- ◆ Used with standard steel pipe
- ◆ Fittings supplied with set screws
- ◆ Malleable casting
- ◆ * Add "A" to Cat No. for Aluminum

Guy Guards


Cat No.	Length Feet	Material	Shipping Wt. lbs (100 pcs)	Std. Pkg
K47-2	7	Half Round	1100	5
K47-3	8	Half Round	1250	4
K47-4	7	Half Hex	1100	10
K47-5	7	Plastic Full Round	315	10



K47-2,3,4

K47-5

- ◆ Steel hot dip galvanized
- ◆ Supplied with clamp for easy installation
- ◆ Tough, durable polyethylene, clamps attached
- ◆ Available in highway yellow or grass green - specify




- ◆ Used to protect poles from vehicle collision
- ◆ Holes are 9/16" for 1/2" lag bolts
- ◆ Hot dip galvanized

Hub Guards

Cat No.	Size Inches	Radius Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K50-1	16 x 18 x 1/8	7-1/2	1100	1
K50-2	16 x 30 x 3/16	7-1/2	2750	1

ANCHORS & GUYING

Strain Yoke Plates

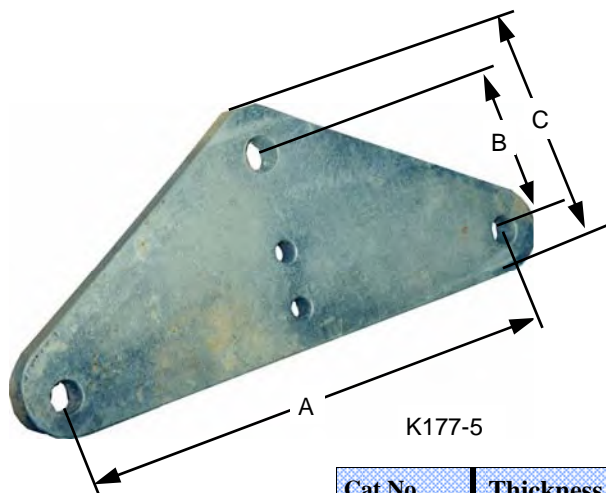

K177-5



K177-3

Cat No.	Thickness Inches	A Inches	B Inches	C Inches	Shipping Wt. lbs (100 pcs)	Std. Pkg
K177-1	1/2	5	2-1/2	4-5/8	320	5
K177-2	5/8	8	2-5/16	4-11/16	600	5
K177-3	5/8	8	4-3/8	6-3/4	800	5
K177-4	5/8	17-7/8	4-9/16	7	1600	5
K177-5	5/8	13	3-11/16	6	1040	5
K177-6	5/8	12	5	6	700	5



K177-4



K177-6



K177-1

- ◆ Some of the strain yoke plates available are shown here. Special yoke plate made to customer's specifications.
- ◆ Specify dimensions "A" & "B" strength requirements, number of holes required and sizes.
- ◆ Plate made from structural steel plate.
- ◆ All corners rounded to decrease corona effect
- ◆ Hot dip galvanized